

## System connectors - FLKM S135-460-4UA/U/S400 - 2314862

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The FLKM S135/S400 adapter connects a SIMATIC® S5 plug directly to the SIMATIC® S7 400 base board.  
Conversion: 6ES5 460-4UA13 (voltage measurement) to 6ES7 431 1KF00-0AB0



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 155328
Weight per Piece (excluding packing)	338.1 g
Custom tariff number	85369010
Country of origin	Germany
Note	Made to Order (non-returnable)

### Technical data

#### General

Max. permissible operating voltage	60 V DC
Max. permissible current	4 A (per path) 4 A (per connection, supply via separate power supply)
Connection type, connector	SIEMENS S5-135 U pin strip
Mounting position	any
Degree of protection	IP00
Standards/regulations	IEC 60664 DIN EN 50178 IEC 62103
Rated surge voltage	0.6 kV (Functional insulation)
Rated insulation voltage	63 V
Pollution degree	2
Surge voltage category	II

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
---------------------------------	------------------

# System connectors - FLKM S135-460-4UA/U/S400 - 2314862

## Technical data

### Ambient conditions

Ambient temperature (storage/transport)	-20 °C ... 70 °C
---	------------------

### Supported controller

Controller	SIEMENS S5-135 U
- suitable I/O card	6ES5 460-4UA13

## Classifications

### eCI@ss

eCI@ss 4.0	27250313
eCI@ss 4.1	27250313
eCI@ss 5.0	27250313
eCI@ss 5.1	27250313
eCI@ss 6.0	27249205
eCI@ss 7.0	27249205

### ETIM


ETIM 2.0	EC000237
ETIM 3.0	EC000237
ETIM 4.0	EC000237
ETIM 5.0	EC002584

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Drawings

Circuit diagram

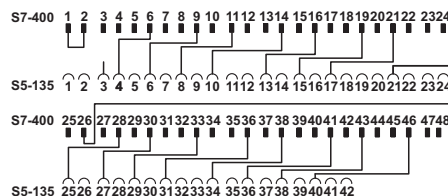

Connection scheme: FLKM S135-460-4UA/U/S400

