

PSD-S OE GN


Order No.: 2700097



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2700097>

Permanent light element, 12 to 240 V AC/DC, green, without bulb

Commercial data

GTIN (EAN)	 4 046356 490993
sales group	K460
Pack	1 pcs.
Customs tariff	85318095
Catalog page information	Page 301 (NTK-2010)

Product notes

WEEE/RoHS-compliant since:
02/02/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Diameter	70 mm
Height	65.5 mm
Material	Polycarbonate PC
Calotte color	green
Weight	55 g

Ambient temperature (operation)	-20 °C ... 60 °C
Degree of protection	IP65, when installed or with cover
Mounting position	Any
Assembly instructions	Rubber seal pre-installed for each element
Base	B15d (bayonet)

Electrical data

Nominal input voltage range	12 V AC/DC ... 240 V AC/DC
Maximum inrush current	21 mA ()
Current consumption	21 mA ()
Source of light, power	7 W
Service life, electrical	Depends on lamps
Operating time	100 %
Optical signal type	Permanent light

Approvals / conformities

Electromagnetic compatibility	Conformance with EMC directive 2004/108/EC and for low-voltage directive 2006/95/EC
-------------------------------	---

Certificates / Approvals



Certification


CUL Listed, UL Listed

Accessories

Item	Designation	Description
General		
2700142	PSD-S AS BULB 5W	Bulb, 5 W, 24 V, BA15d base

Diagrams/Drawings

Dimensioned drawing

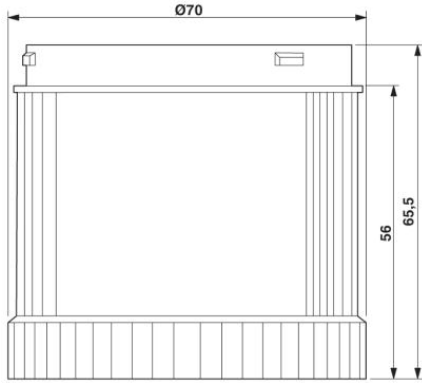

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;