

## FLKM 50/4-FLK14/PA-S135

Order No.: 2288590


The illustration shows versions FLKM 50-PA-S135/P and FLKM 50/4-FLK14/  
PA-S135



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2288590>


---

VARIOFACE front adapter, for Siemens SIMATIC® S5-135U, 4 x 8 channels can be connected

Commercial data	
GTIN (EAN)	
Note	Made-to-order
sales group	I600
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 167 (IF-2002)

**Product notes**

WEEE/RoHS-compliant since:  
09/18/2006



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data**

General	
Nominal voltage $U_N$	< 50 V AC
	60 V DC
Channels which can be connected	32
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	4
No. of positions, plug connector	14
Number of positions	50
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Max. permissible current	0.5 A (per path)
	8 A (per connection, supply via separate power supply)

Max. permissible total current	3 A (Per Byte, for supply via connector)
Pollution degree	2
Surge voltage category	II
Supported controller	SIEMENS S5-135 U

**Certificates / Approvals**




Certification

GOST

**Diagrams/Drawings**

Circuit diagram

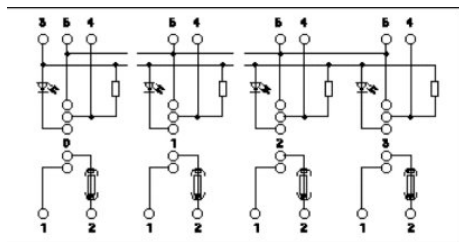

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;