

PSD-S OE FL CL


Order No.: 2700105



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2700105>

Flashing beacon element, 24 V DC, clear, Xenon flash tube

Commercial data

GTIN (EAN)	
Note	Made-to-order
sales group	K460
Pack	1 pcs.
Customs tariff	85318095
Catalog page information	Page 301 (NTK-2010)

Product notes

WEEE/RoHS-compliant since:
02/02/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Diameter	70 mm
Height	65.5 mm
Material	Polycarbonate PC
Calotte color	clear
Weight	73 g

Ambient temperature (operation)	-20 °C ... 50 °C
Degree of protection	IP65, when installed or with cover
Mounting position	Any
Assembly instructions	Rubber seal pre-installed for each element

Electrical data

Input voltage	24 V DC
Maximum inrush current	max. 200 mA
Current consumption	125 mA
Service life, electrical	4 million flashes, minimum
Operating time	100 %
Optical signal type	Flashing
Signal frequency	Approx. 1 Hz

Approvals / conformities

Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
-------------------------------	--

Certificates / Approvals




Certification

CUL Listed, UL Listed

Diagrams/Drawings

Dimensioned drawing

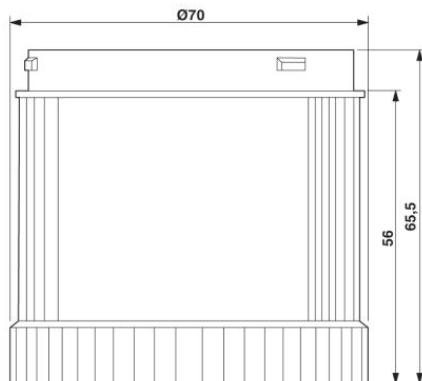

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;