


# FLKM 16-PA- 332-5HF/I/MINI-MCR

Order No.: 2318240



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2318240>

VARIOFACE front adapter, for SIMATIC® S7-300, only in connection with MINI MCR-SL-V8-FLK 16-A. Connectable card: 332-5HF0-0AB01.

Commercial data	
GTIN (EAN)	 4 046356 301657
sales group	I600
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 235 (IF-2011)

#### Product notes

WEEE/RoHS-compliant since: 09/24/2007



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Nominal voltage $U_N$	30 V AC/DC
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	1
No. of positions, plug connector	16

Number of positions	16
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	DIN EN 50178 IEC 62103
Max. permissible current	50 mA (per path) 500 mA (per connection, supply via separate power supply)
Name	Air and creepage distances between the power circuits
Standards/regulations	DIN EN 50178
Rated surge voltage / insulation	0.5 kV / basic insulation
Degree of protection	IP20
Supported controller	SIEMENS S7-300 / ET 200 M
Supported I/O card	332-5HF0x-0AB0

**Certificates / Approvals**




Certification

CUL, UL

**Diagrams/Drawings**

Circuit diagram

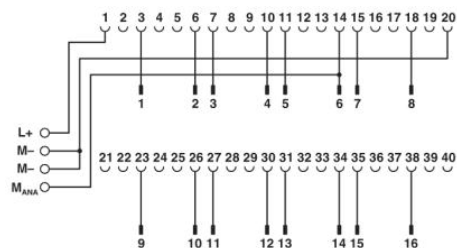

FLKM 16-PA-332-5HF//MINI-MCR connection scheme

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;