

SD-D/SP/LA/YE

Order No.: 2963475

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2963475>

Rail-mountable socket, with light indicator, housing color: yellow, with spring-cage connection, national version: Germany, housing width 45 mm

Commercial data	
GTIN (EAN)	4017918590536
sales group	H070
Pack	5 pcs.
Customs tariff	85366990
Weight/Piece	0.07526 KG
Catalog page information	Page 602 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
04/01/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Nominal voltage U_N	250 V AC
Nominal current I_N	10 A DC
	16 A AC

Status display	Glow lamp or LED with preresistor
Contact material	CuZn37
For country-specific use in	D
Color	yellow
Insulating material	PA
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Standards/regulations	IEC 83
	DIN 49440-1
Width	45 mm
Height	70.5 mm
Depth	75 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Type of connection	Spring-cage connection
Stripping length	8 mm
Screw thread	M3

Certificates / Approvals




Certification

GOST, VDE-PZI

Diagrams/Drawings

Circuit diagram

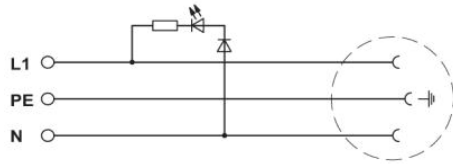

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;