


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	75 Ω	170 Ω	320 Ω
Minimum	- Ω	136 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)


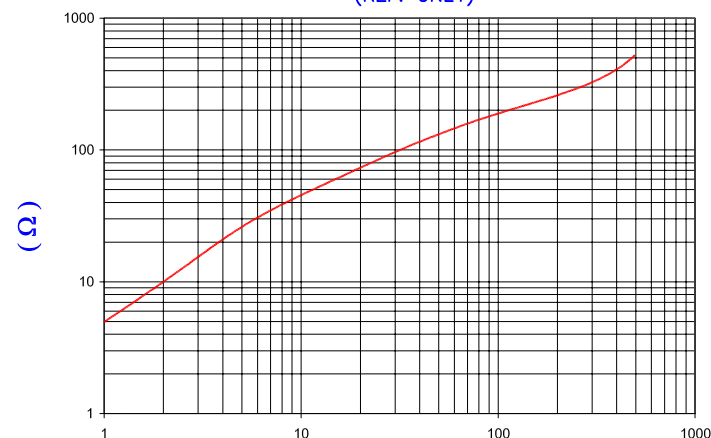


AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture REF 3219

FERRITE CORE DIMENSIONS:

A	9.96 [.392]	+	0.15 [.006]
B	4.88 [.192]	+	0.13 [.005]
C	20.50 [.807]	+	0.25 [.010]
D	4.14 [.163]	+	0.13 [.005]

**UNCONTROLLED
DOCUMENT**

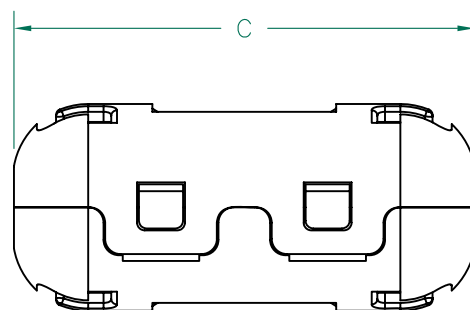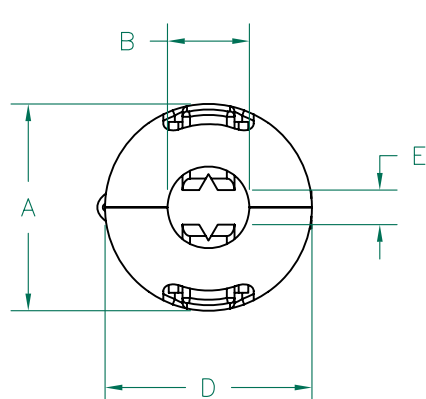

FREQUENCY (MHz)

NOTES:

1. ASSEMBLED PART #: 28A0392-0A2
2. CASE COLOR: BLACK
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon

CASE DIMENSIONS:

A	13.72 [.540]	+	REF.
B	5.44 [.214]	+	REF.
C	30.56 [1.203]	+	REF.
D	13.72 [.540]	+	REF.
E	2.29 [.090]	+	REF.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. Laird TECHNOLOGIES				
J	UPDATED NOTE 3	09/15/10	JUN					
H	UPDATE LOGO ADD NOTES 3&4	01/26/09	JRK					
G	UPDATE 100MHz MINIMUM VALUE	06/26/07	TMB					
F	UPDATE COMPANY LOGO	04/17/07	TMB					
E	ADD DIMENSION E TO CASE CALLOUT	02/05/07	TMB					
D	CHANGE CASE TOLERANCES TO REF RE-MOVE CORE & CASE REF REVISE NOTES	07/27/06	TMB	PROJECT/PART NUMBER: 28A0392-0A2		REV J	PART TYPE: FERRITE SNAP ON	DRAWN BY: JRK
C	UPDATE CORE AND CASE DESIGN REVISE NOTES	09/23/05	TMB	DATE: 06/25/04		SCALE: NTS	MATERIAL:	
REV	DESCRIPTION	DATE	INT	CAD # 28A0392-0A2-J		TOOL # -	NiZn Ferrite	

Laird
TECHNOLOGIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Technologies:](#)

[28A0392-0A2](#)