


**VIP-PA-FLK50/4X14/ 2,5M/S7**

Order No.: 2322582

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322582>

VIP VARIOFACE front adapter, with connected system cables for SMATIC S7-300, 4 x 8 channels can be connected, cable length: 2.5 m

Commercial data	
GTIN (EAN)	 4 046356 452328
sales group	I560
Pack	1 pcs.
Customs tariff	85444290
Catalog page information	Page 229 (IF-2011)

## Product notes

WEEE/RoHS-compliant since:  
12/18/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General</b>	
Note	Analog I/O cards: <b>To avoid short-circuits, all bridges must be removed! No voltage supply may be supplied to the front adapter!</b>

	Digital I/O cards: The front adapter is delivered non-isolated. By removing the bridges, electrical isolation (in groups of 8) can be obtained.
Nominal voltage $U_N$	< 50 V AC 60 V DC
Channels which can be connected	32
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	4
No. of positions, plug connector	14
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Max. permissible current	1 A (per path)
Standards/regulations	IEC 60664
Rated surge voltage / insulation	0.8 kV
Pollution degree	2
Surge voltage category	III
Supported controller	SIEMENS S7-300 / ET 200 M
Supported I/O card	CPU 313C CPU 313C-2PtP CPU 313C-2DP CPU 314C-2PtP CPU 314C-2DP 321-1BL00-0AA0 322-1BL00-0AA0 323-1BL00-0AA0 331-7NF00-0AB0 331-7NF10-0AB0 331-7PF01-0AB0 331-7PF11-0AB0 350-2AH01-0AE0 357-4AH01-0AE0

#### Certificates / Approvals



Certification


CUL, UL

---

## Diagrams/Drawings

### Circuit diagram

---

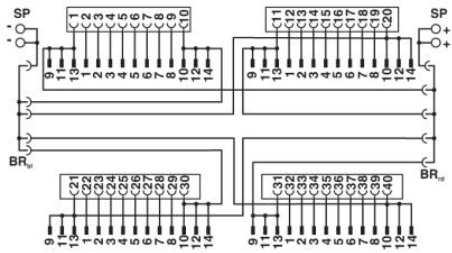

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;