





SPC

TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005JLVG

REVISIONS				DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVI
XX	XX	XXXX	XXXX	4-10-08	XXXX	4-10-08	XXXX
XXXX	XXXX		XXXX	4-10-08	XXXX	4-10-08	XXXX

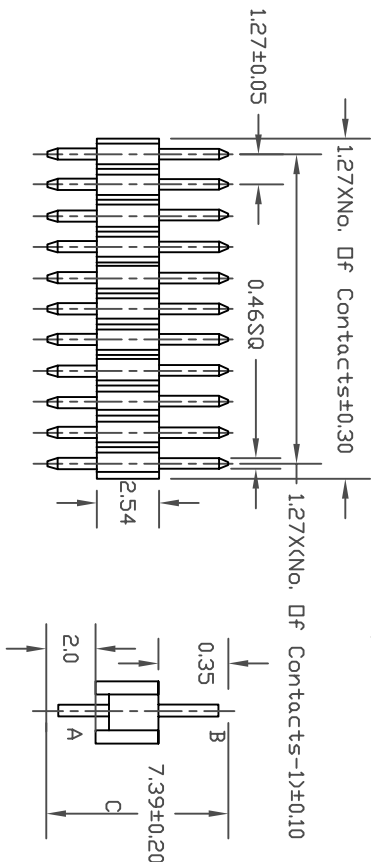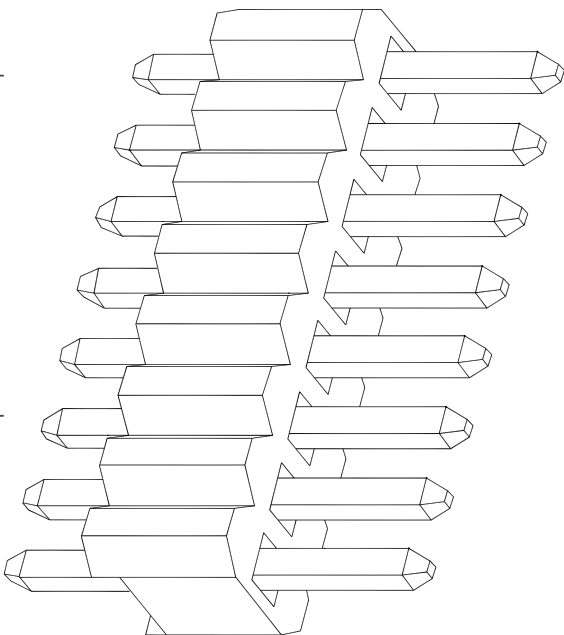

Specifications

- 1. Current rating : 1.0A AC/DC.
- 2. Voltage rating : 50V AC/DC.
- 3. Contact resistance : 20m ohm. max.
- 4. Insulation resistance : 500M ohm. Min. At 100V DC.
- 5. Withstanding voltage : 500V AC for one minute.
- 6. Operating temperature Range : -25°C to +125°C.

Material and Finish

- 1. Insulator : PBT (UL94V-0).
- 2. Contact : Copper Alloy.
- 3. Plating : Gold Plated.

Feature


- 1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.

Ordering Information

2206PA-05G-739

① ② ③ ④

① Plug Right Angle No. Of Positions 2 To 50 Ways	② Gold Plated	③ Blank Standard Type XXXX Special length C Dimension
--	---------------	---

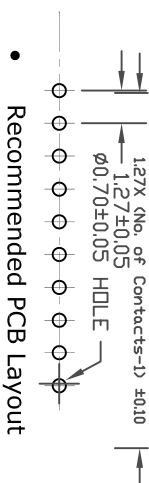

Recommended PCB Layout



RoHS
Compliant

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:		DATE:		DRAWING TITLE:			
XXXX		4-10-08		PC Board			
CHECKED BY:		DATE:		SIZE DWG. NO.		ELECTRONIC FILE	
XXXX		4-10-08		A 2206PA-05G-739		11N6302	
APPROVED BY:		DATE:		SCALE: NTS		U/D.M: INCHES [mm]	
XXXX		4-10-08				SHEET: 1 OF 1	