


# GENERAL PURPOSE TRANSFORMERS

2 Watt Pulse, Electrostatically Shielded,  
500 mW Pulse, RF Pulse, and Control Transformers

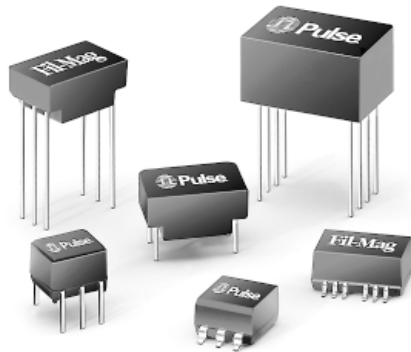


-  Wide range of inductors and turns ratios
-  Suitable for a variety of applications
-  High flux density capability
-  Available in through hole and surface mount packages

## Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

| Part Number                                    | Turns Ratio (±5%) | Primary Sine Wave OCL (mH MIN) | Primary ET-Constant (V-μs MIN) | Rise Time (ns MAX) | PRI/SEC* C <sub>ww</sub> (pF MAX) | Leakage Inductance PRI/SEC (μH MAX) | DCR Primary (Ω MAX) | DCR Secondary (Ω MAX) | DCR Tertiary (Ω MAX) | Hi-Pot (Vrms) | Schematic/Package Style |
|------------------------------------------------|-------------------|--------------------------------|--------------------------------|--------------------|-----------------------------------|-------------------------------------|---------------------|-----------------------|----------------------|---------------|-------------------------|
| <b>2 WATT PULSE TRANSFORMERS</b>               |                   |                                |                                |                    |                                   |                                     |                     |                       |                      |               |                         |
| PE-2227X                                       | 1:1               | 0.5                            | 46                             | 8                  | 26                                | 1.7                                 | 1.3                 | 1.4                   | —                    | 700           | TH1                     |
| PE-2228X                                       | 1:1               | 1.3                            | 84                             | 30                 | 40                                | 3.0                                 | 3.6                 | 3.8                   | —                    | 700           | TH1                     |
| PE-2243X                                       | 1:1               | 20.0                           | 250                            | 80                 | 87                                | 10.5                                | 27.0                | 28.0                  | —                    | 700           | TH1                     |
| PE-2229X                                       | 1:1:1             | 1.3                            | 91                             | 30                 | 38                                | 3.2                                 | 3.6                 | 3.8                   | 3.9                  | 700           | TH4                     |
| PE-2231X                                       | 1:1:1             | 5.0                            | 196                            | 70                 | 35                                | 13.0                                | 8.8                 | 9.6                   | 11.0                 | 700           | TH4                     |
| PE-2671X                                       | 4:1:4             | 0.2                            | 53                             | 50                 | 17                                | 5.7                                 | 1.2                 | 0.2                   | 1.3                  | 700           | TH4                     |
| <b>ELECTROSTATICALLY SHIELDED TRANSFORMERS</b> |                   |                                |                                |                    |                                   |                                     |                     |                       |                      |               |                         |
| PE-5154X                                       | 1:1               | 0.2                            | 91                             | 17                 | 2.7                               | 3.1                                 | 1.6                 | 1.6                   | —                    | 700           | TH2                     |
| PE-5156X                                       | 1:1               | 1.2                            | 77                             | 19                 | 4.1                               | 2.8                                 | 1.1                 | 1.1                   | —                    | 700           | TH2                     |
| PE-5160X                                       | 1:1               | 10.0                           | 224                            | 200                | 4.5                               | 22.0                                | 11.0                | 11.0                  | —                    | 700           | TH2                     |
| PE-5158X                                       | 1CT:1CT           | 1.0                            | 77                             | 21                 | 3.2                               | 2.5                                 | 1.8                 | 1.8                   | —                    | 700           | TH3                     |
| PE-5163X                                       | 1CT:1CT           | 10.0                           | 252                            | 60                 | 2.5                               | 16.7                                | 14.0                | 14.0                  | —                    | 700           | TH3                     |

\*NOTE: for Electrostatically Shielded Transformers, C<sub>ww</sub> is measured with shield corrected to guard voltage.

## Schematics

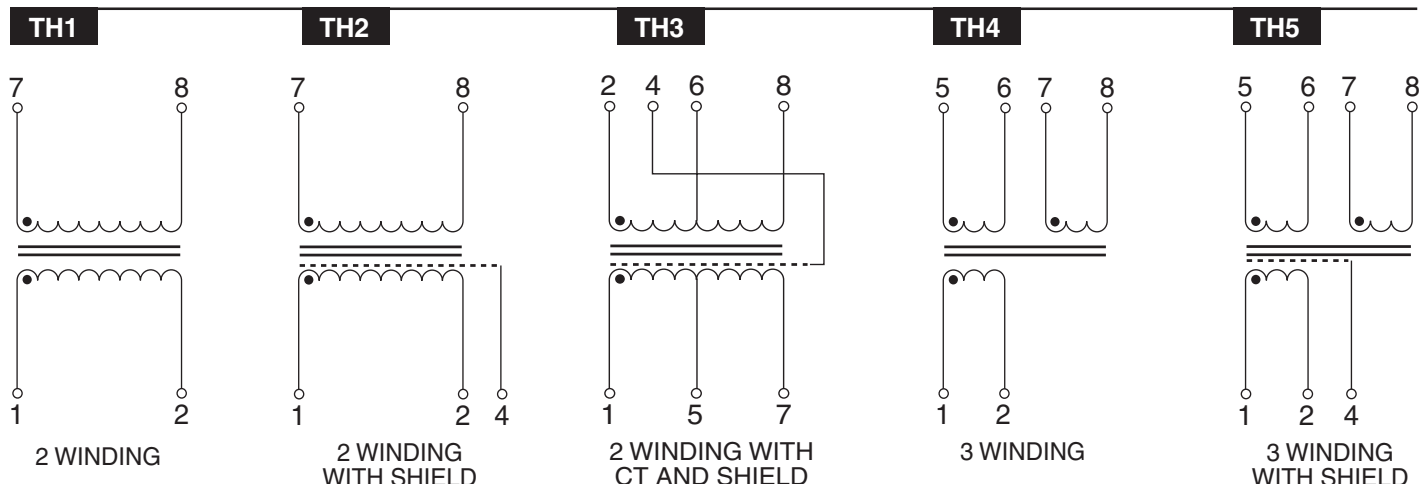

# GENERAL PURPOSE TRANSFORMERS

## 500 mW Pulse




Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

| Part Number                      | Turns Ratio (±5%) | Primary Sine Wave OCL (mH MIN) | Primary ET-Constant (V-μs MIN) | Rise Time (ns MAX) | PRI/SEC C <sub>ww</sub> (pF MAX) | Leakage Inductance PRI/SEC (μH MAX) | DCR Primary (Ω MAX) | DCR Secondary (Ω MAX) | DCR Tertiary (Ω MAX) | Hi Pot V <sub>rms</sub> | Schematic Package Style |
|----------------------------------|-------------------|--------------------------------|--------------------------------|--------------------|----------------------------------|-------------------------------------|---------------------|-----------------------|----------------------|-------------------------|-------------------------|
| <b>500 mW PULSE TRANSFORMERS</b> |                   |                                |                                |                    |                                  |                                     |                     |                       |                      |                         |                         |
| PE-5760                          | 1:1:1             | 5.0                            | 25.0                           | 10.5               | 70                               | 1.3                                 | 3.9                 | 3.9                   | 3.9                  | 500                     | TH6                     |
| PE-5761                          | 1:1:1             | 2.0                            | 16.0                           | 8.2                | 37                               | 0.8                                 | 2.5                 | 2.5                   | 2.5                  | 500                     | TH6                     |
| PE-5762                          | 1:1:1             | 0.5                            | 8.5                            | 5.3                | 32                               | 0.4                                 | 1.3                 | 1.3                   | 1.3                  | 500                     | TH6                     |
| PE-5763                          | 1:1:1             | 0.2                            | 5.0                            | 4.2                | 18                               | 0.3                                 | 0.9                 | 0.9                   | 0.9                  | 500                     | TH6                     |
| PE-5764                          | 1:1:1             | 0.05                           | 5.2                            | 5.6                | 18                               | 0.5                                 | 1.3                 | 1.3                   | 1.3                  | 500                     | TH6                     |
| PE-5769                          | 2:1:1             | 0.5                            | 8.5                            | 5.6                | 11                               | 1.1                                 | 1.3                 | 0.7                   | 0.7                  | 500                     | TH6                     |
| PE-8270                          | 1CT:1CT           | 2.0                            | 16.0                           | —                  | 37                               | 0.8                                 | 2.5                 | 2.5                   | —                    | 700                     | TH7                     |
| PE-8271                          | 1CT:1CT           | 0.5                            | 8.5                            | —                  | 32                               | 0.4                                 | 1.3                 | 1.3                   | —                    | 500                     | TH7                     |
| PE-8272                          | 1CT:1CT           | 0.2                            | 5.0                            | 4.2                | 18                               | 0.3                                 | 0.9                 | 0.9                   | —                    | 700                     | TH7                     |
| PE-8276                          | 2CT:1CT           | 2.0                            | 16.0                           | —                  | 19                               | 1.8                                 | 2.5                 | 1.4                   | —                    | 500                     | TH7                     |
| PE-8277                          | 2CT:1CT           | 0.5                            | 8.5                            | —                  | 12                               | 1.2                                 | 1.4                 | 0.8                   | —                    | 700                     | TH7                     |
| PE-65502                         | 1.25:1            | 1.2                            | 10.0                           | 10.0               | 35                               | 0.8                                 | 0.8                 | 0.7                   | —                    | 1500                    | TH8                     |
| 23Z81                            | 1:1:1 dual        | .085                           | 2.5                            | 3.0                | 9.5                              | 0.2                                 | 0.20                | —                     | —                    | 500                     | TH9                     |
| 66Z1203                          | 1:1:1             | —                              | 25.0                           | 10.5               | 60                               | 1.3                                 | 3.9                 | 3.9                   | 3.9                  | 500                     | TH6                     |
| 66Z1212                          | 1:1:1             | —                              | 16.0                           | 11.0               | 19                               | 1.8                                 | 2.5                 | 1.4                   | 1.4                  | 500                     | TH6                     |
| PE-5762M                         | 1:1:1             | 0.5                            | 5.0                            | 4.2                | 25                               | 0.3                                 | 0.9                 | 0.9                   | 0.9                  | 1500                    | SM1                     |
| PE-5763M                         | 1:1:1             | 0.2                            | 4.0                            | 3.5                | 18                               | 0.2                                 | 0.7                 | 0.7                   | 0.7                  | 1500                    | SM1                     |
| PE-5769M                         | 2:1:1             | 0.5                            | 5.0                            | 4.2                | 18                               | 0.3                                 | 0.9                 | 0.45                  | 0.45                 | 1500                    | SM1                     |
| PE-8271M                         | 1CT:1CT           | 0.5                            | 5.0                            | 4.2                | 18                               | 0.3                                 | 0.9                 | 0.9                   | —                    | 1500                    | SM2                     |
| PE-8272M                         | 1CT:1CT           | 0.2                            | 4.0                            | 3.5                | 14                               | 0.2                                 | 0.7                 | 0.7                   | —                    | 1500                    | SM2                     |
| PE-8277M                         | 2CT:1CT           | 0.5                            | 5.0                            | 6.0                | 18                               | 0.7                                 | 0.9                 | 0.45                  | —                    | 1500                    | SM2                     |
| 23Z81SM                          | 1:1:1 dual        | .085                           | 2.5                            | 3.0                | 9.5                              | 0.2                                 | 0.20                | —                     | —                    | 500                     | SM3                     |
| 23Z87SM                          | 1:1:1             | .085                           | 2.5                            | 3.0                | 9.5                              | 0.2                                 | 0.20                | —                     | —                    | 500                     | SM2                     |

**NOTE:** To order Tape & Reel packaging for surface mount parts, add the suffix "T" to the part number. (Example: PE-5769MT). The "T" will appear on all paper work, but will not be marked on parts.

## Schematics

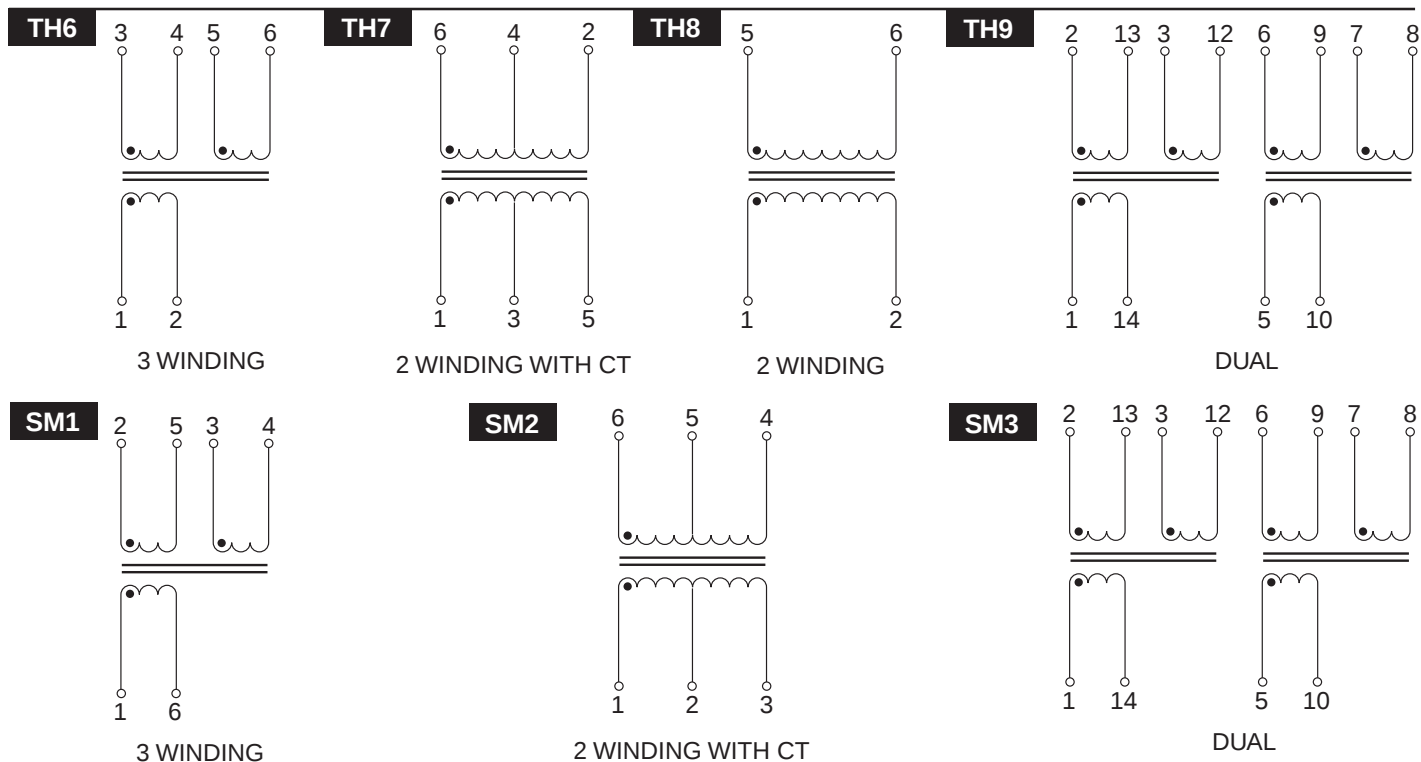


# GENERAL PURPOSE TRANSFORMERS

## 2 Watt Pulse, Electrostatically Shielded, and 500 mW Pulse Transformers




### Mechanicals


#### TH1 to TH5

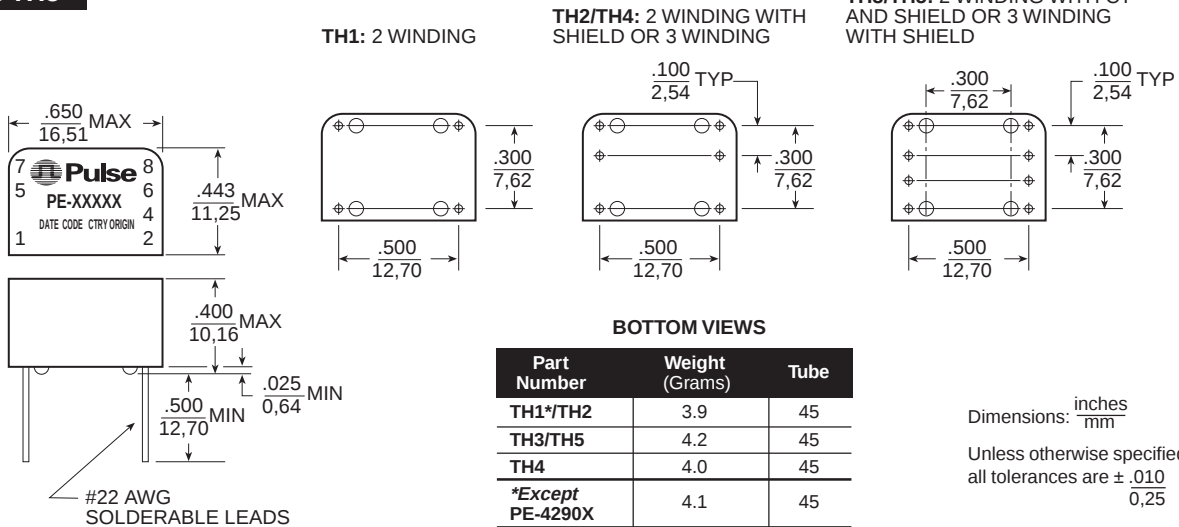

#### TH6 to TH8

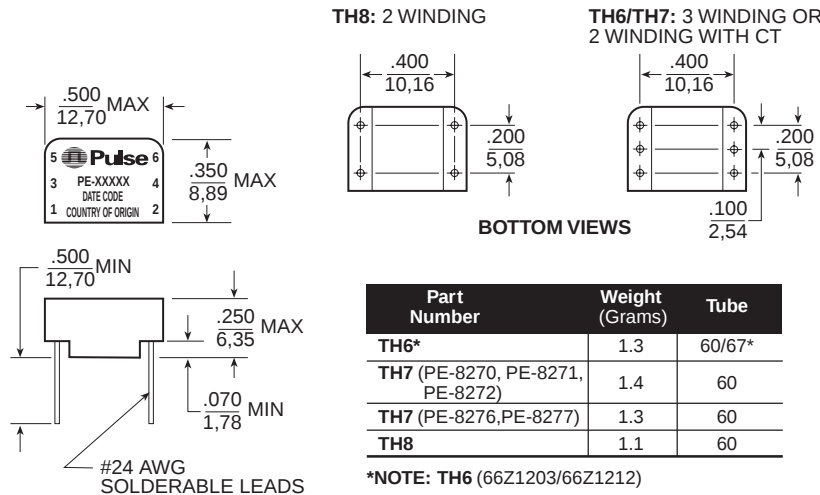

#### TH9

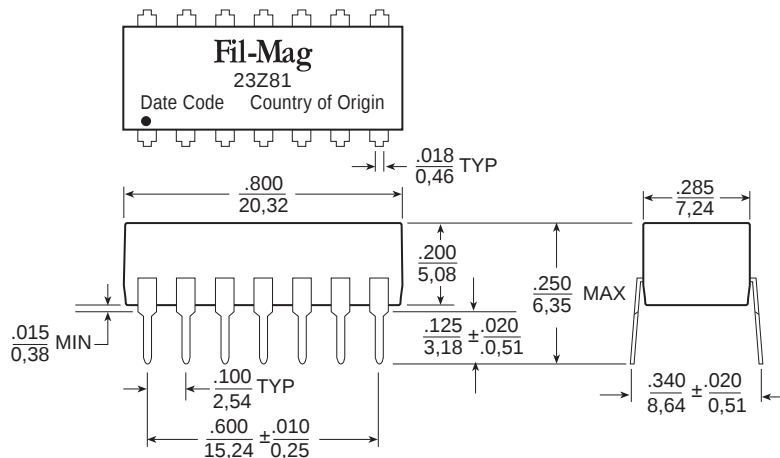


# GENERAL PURPOSE TRANSFORMERS

2 Watt Pulse, Electrostatically Shielded,  
and 500 mW Pulse Transformers




## Mechanicals

### SM1 & SM2 (except 23Z87SM)

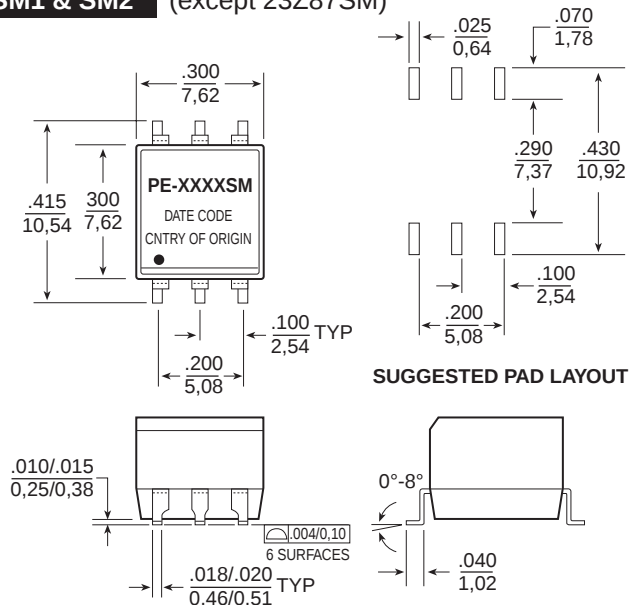

### 23Z87SM

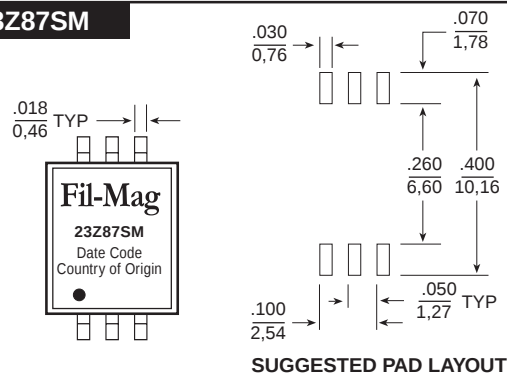


| Part           | Weight (Grams) | Tape & Reel | Tube |
|----------------|----------------|-------------|------|
| SM1            | 0.6            | 500         | 65   |
| SM2:           |                |             |      |
| PE-8271M       | 0.7            | 500         | 60   |
| PE-8272M       | 0.7            | 500         | 65   |
| PE-8277M       | 0.6            | 500         | 65   |
| Except 23Z87SM | 0.5            | 750         | 100  |

Dimensions:  $\frac{\text{inches}}{\text{mm}}$   
 Unless otherwise specified,  
 all tolerances are  $\pm \frac{.010}{0,25}$

Dimensions:  $\frac{\text{inches}}{\text{mm}}$   
 Unless otherwise specified, all tolerances are  $\pm \frac{.005}{0,13}$

### SM3

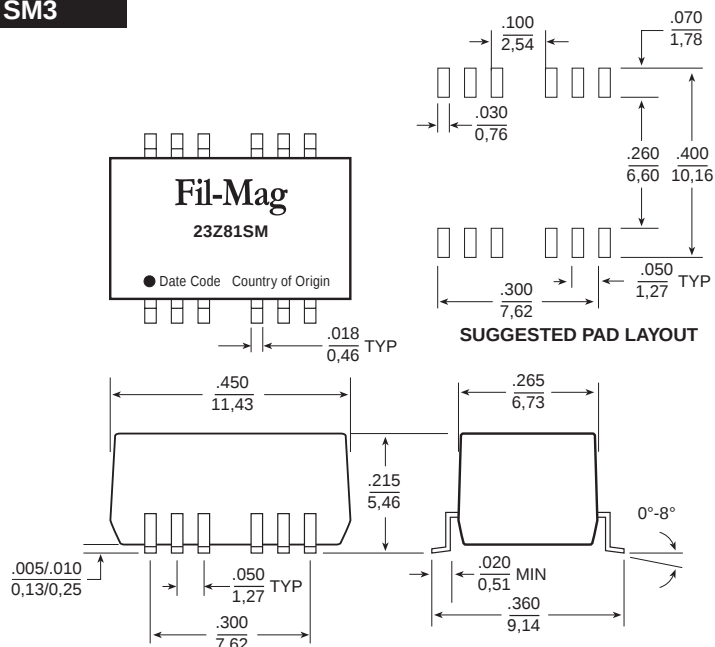

Weight ..... 0.9 grams  
 Tube ..... 50/tube  
 Tape & Reel ..... 750/reel

Dimensions:  $\frac{\text{inches}}{\text{mm}}$   
 Unless otherwise specified, all tolerances are  $\pm \frac{.005}{0,13}$

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[23Z81SM-T](#) [23Z81SM](#) [23Z81SMNL](#) [23Z81SMNLT](#)