
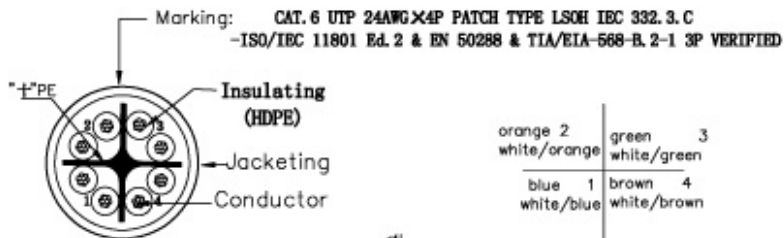



DATE	REV	DESCRIPTION	BY	CHKD

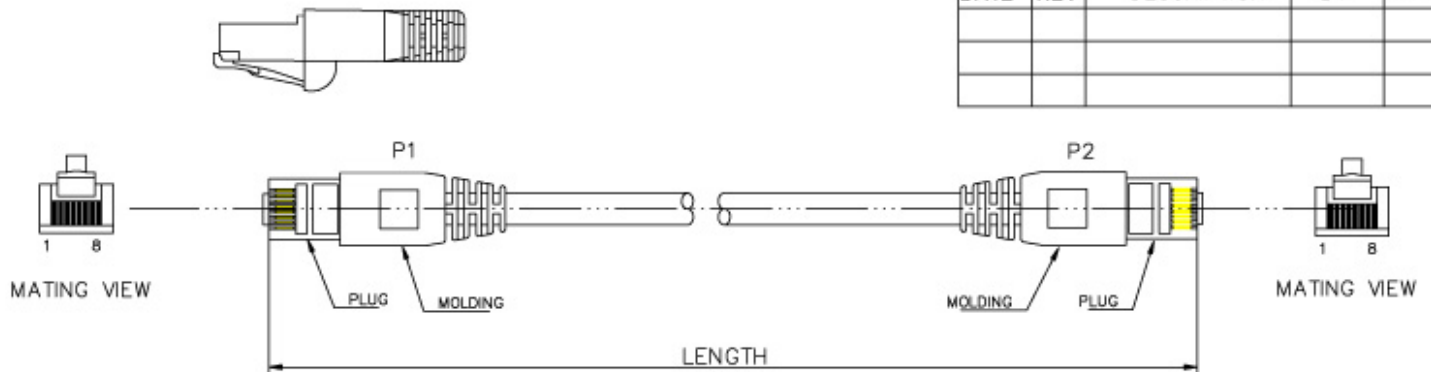

Conductor	Bare Copper 24AWG TIA/ISO45611mm
Insulation	Thickness:MIN of any point:1.1mm MAX:AVG0.23mm Diameter:1.04±0.03mm
Jacketing	LSOH Thickness:MIN of any point:0.5mm MAX:AVG0.65mm Diameter:5.44±0.3mm

WIRE	CAT.6 UTP STR 24AWG×4P
PLUG	YU-02
LENGTH	XXM
COLOR	XX

RoHS Compliant



orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Unless specified on the drawing, tolerances are per the follows:
 .X ± 1
 .X ± 0.2
 .XX ± 0.05

3RD



PA/R	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

DRAW.NO	YU-02	ITEM	2293-XXX
DEPARTMENT		DRAW	Zhongyang Wu
SCALE		CHECKER	
UNIT	MM	APPROVAL	
		DATE	2007/05/14
		DATE	