





X
(without protection cover)



Loading-Plan
acc. to TIA/EIA 568B

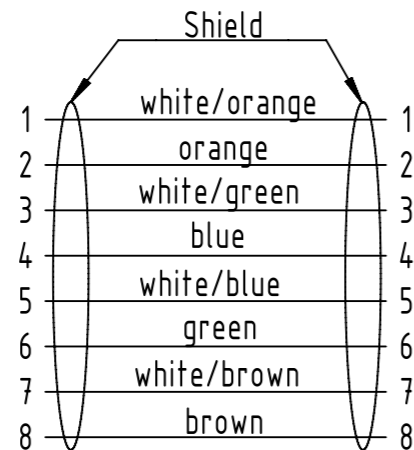

Y
(without protection cover)

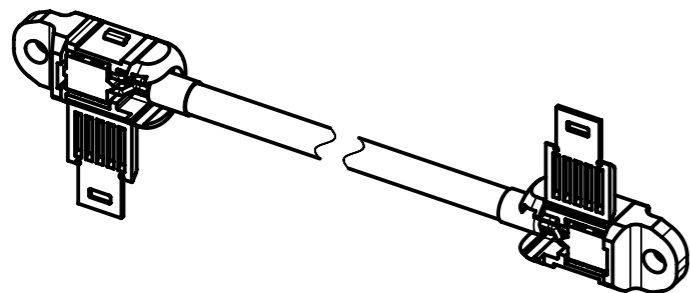

- Protection level: IP20
- Temperature range: -40°C...+70°C

18	20826002150	4x2xAWG27/7, PUR, Cat.7, yellow	15
17	20826002140		14
16	20826002130		13
15	20826002120		12
14	20826002110		11
13	20826002100		10
12	20826002075		7.5
11	20826002070		7
10	20826002060		6
9	20826002050		5
8	20826002040		4
7	20826002030		3
6	20826002020		2
5	20826002010		1
4	20826002008		0.8
3	20826002006		0.6
2	20826002004		0.4
1	20826002002		0.2
Cont. no.	Part no.	Type of cable	Dim. a[m]

	All Dimensions in mm Original Size DIN A3		Scale 2:1	Free size tol.		Ref.
	All rights reserved Department EC PD - RO		Created by POPESCUD	Inspected by AVRAM	Standardisation HOFFMANN	Date 2016-04-11
HARTING Electronics GmbH D-32339 Espelkamp		Title PreLink System Cable Assembly			Doc-Key / ECM-Nr. 100209218/UGD/005/B 500000103095	
		Type TB	Number 20826002XXX		Rev. B	Page 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[20826002004](#) [20826002100](#) [20826002040](#) [20826002006](#) [20826002020](#) [20826002030](#) [20826002010](#)
[20826002008](#) [20826002050](#)