
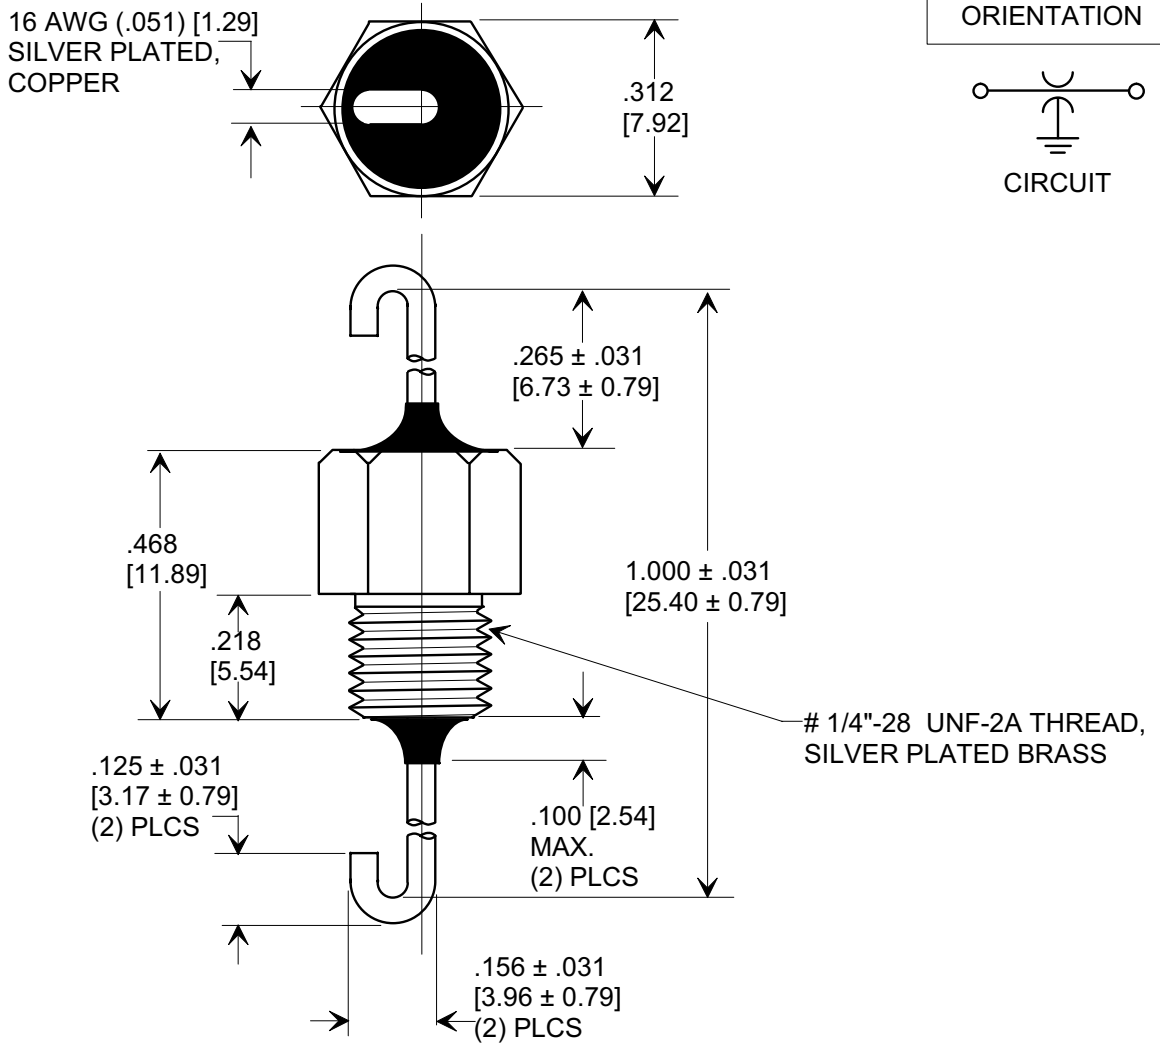



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SPECIFICATIONS

Style No:	2443-007
Value:	5000 pF
Value Tol.:	+ 80% -20%
Temp. Coef.:	X5W
Rating:	500 WVDC @ 85°C
Operating Range:	-55°C TO +85°C
To Tusonix Spec Unless Stated Otherwise - See Note 2	"Typical", No Load Insertion Loss (dB) @ 25°C per MIL-STD - 220
	10 MHz 100 MHz 1 GHz 10 GHz
	15 30 45 50

NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER, BULK PACKAGED.
2. INSERTION LOSS TEST NOT LOT INSPECTED, VALUES ARE TYPICAL ONLY FOR REFERENCE.

REVISION RECORD Original Release C.O. 20010914-1-01	0		--TOLERANCES-- Unless Otherwise Specified	Title BUSHING STYLE FEED-THRU CAPACITOR		
			DECIMAL ± .015 [0.38]	Drawn L.E. 09-19-01		
			ANGLES ±	Approved B.Mc. 09-19-01		Scale 3X
			TUSONIX TUCSON, ARIZONA	A	2443-007-X5W0-502Z	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[2443-007-X5S0-102MLF](#) [2443-007-X5W0-502ZLF](#)