



SPC

TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS				DDC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVI
XX	XX	XXXX	XXXX	02-10-08	XXXX	02-10-08	XXXX
XXXX	XXXX		XXXX	02-10-08	XXXX	02-10-08	XXXX

Specifications

- 1. Current rating : 10A AC/DC
- 2. Voltage rating : 50V AC/DC
- 3. Contact resistance : 20m ohm. max.
- 4. Insulation resistance : 500M ohm. Min. At 100V DC
- 5. Withstanding voltage : 500V AC for one minute
- 6. Operating temperature Range : -25°C to +125°C

Material and Finish

- 1. Insulator : PBT (UL 94V-0)
- 2. Contact : Copper Alloy
- 3. Plating : Gold Plated


Feature

- 1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.



Ordering Information

2206PA-20 G-739
① ② ③ ④

① Plug Straight Single Row	③ Gold Plated T. Tn Plated	④ Special Length C Dimension
② No. Df Contacts (2 To 50 Ways)		

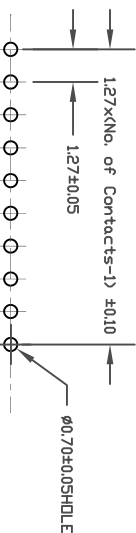

Recommended PCB Layout

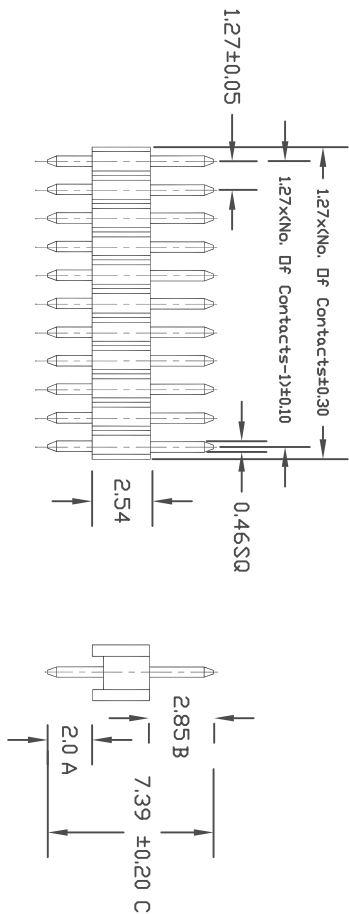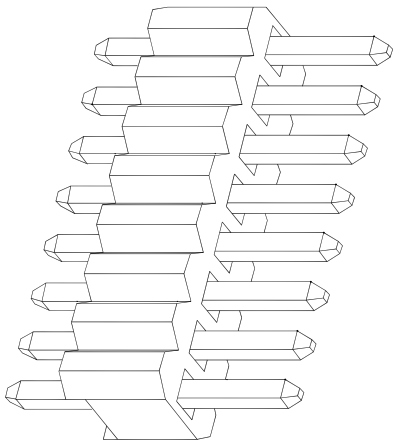

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:	DRAWING TITLE: PC Board			
XXXX	02-10-08	SIZE	DWG. NO.	ELECTRONIC FILE	REV
CHECKED BY:	DATE:	A	2206PA-20G-739	11N6304	XX
APPROVED BY:	DATE:	SCALE:	NTS	U.D.M. INCHES [mm]	SHEET: 1 OF 1