



SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION,
WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY.

SPC-F005.DWG

REVISIONS				DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVI
XX	XX	XXXX	XXXX	02-10-08	XXXX	02-10-08	XXXX
XXXX	XXXX		XXXX	02-10-08	XXXX	02-10-08	XXXX

Specifications

Current Rating : 10A AC/DC
Voltage Rating : 50V AC/DC
Contact Resistance : 20m ohm. max.
Insulation Resistance : 500M ohm. Min. At 100V DC
Withstanding Voltage : 500V AC for one minute
Operating Temperature Range : -25°C to +125°C

Material and Finish

1. Insulator : PBT (UL 94V-0)
2. Contact : Copper Alloy
3. Plating : Gold Plated



Feature

1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.


Ordering Information

2206PA-10 G-739

① PA Plug Straight Single Row	③ Gold Plated Ti, Tin Plated	④ Special Length C Dimension
② No. Df Contacts (2 To 50 Vays)		

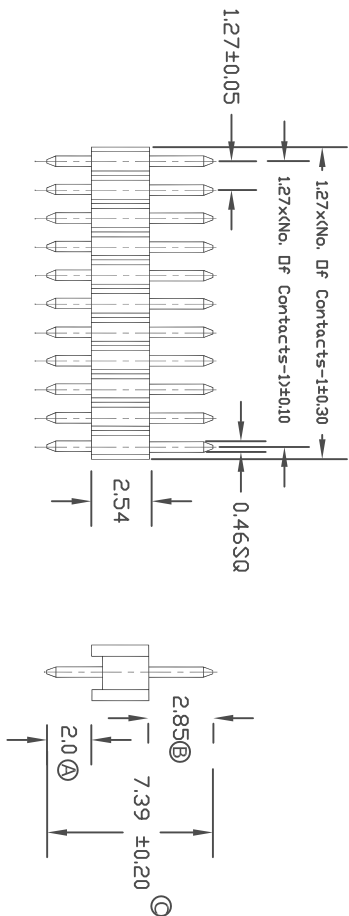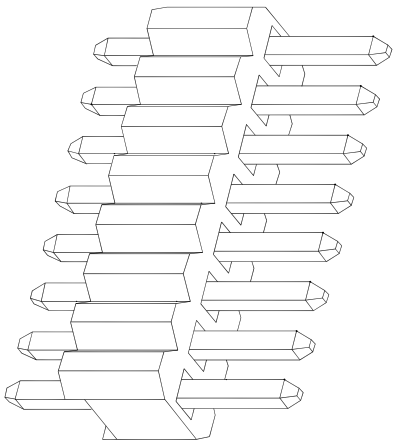

Recommended PCB Layout



DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

DRAWN BY:

DATE:

XXXX

02-10-08

CHECKED BY:

DATE:

XXXX

02-10-08

APPROVED BY:

DATE:

XXXX

02-10-08

PC Board

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	2206PA-10G-739	11N6303	XX
SCALE:	NTS	U.D.M.: INCHES [mm]	SHEET: 1 OF 1