



SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION,
WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY.

SPC-F005.DWG

REVISIONS					DDC. NO.	SPC-F005	Effective	7/8/02	DCP No	1398
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVI	DATE		
XX	XX	XXXX	XXXX	03-10-08	XXXX	03-10-08	XXXX	03-10-08		
XXXX	XXXX		XXXX	03-10-08	XXXX	03-10-08	XXXX	03-10-08		

Specifications

- 1. Current rating : 10A AC/DC
- 2. Voltage rating : 50V AC/DC
- 3. Contact resistance : 20m ohm, max.
- 4. Insulation resistance : 500M ohm, Min. At 100V DC
- 5. Withstanding voltage : 500V AC for one minute
- 6. Operating temperature Range : -25°C to +125°C

Material and Finish

1. Insulator : PBT (UL94V-0)
2. Contact : Copper Alloy
3. Plating : Gold Plated

Feature


1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.

Ordering Information

2206RPA-20G

① ② ③

① Plug Right Angle No. of Positions 4 to 50 Ways	② Gold Plated	③ Blank: Standard Type
--	---------------	------------------------

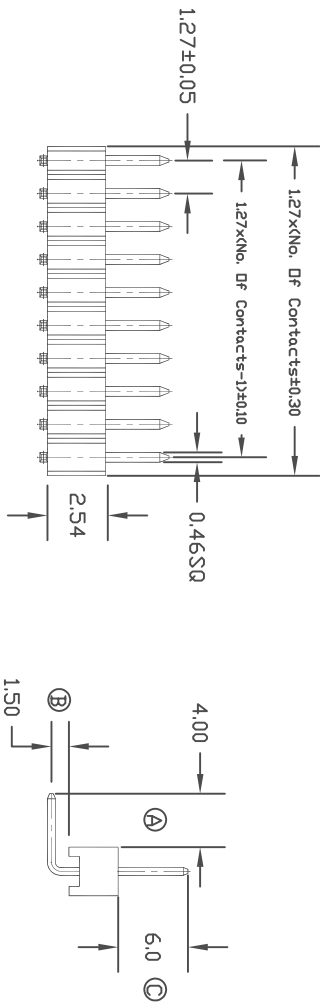

- Recommended PCB Layout



DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:	DRAWING TITLE:			
XXXX	03-10-08	PC Board			
CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
XXXX	03-10-08	A	2206RPA-20G	11N6307	XX
APPROVED BY:	DATE:	SCALE:	NTS	U.D.M.: INCHES [mm]	SHEET: 1 OF 1
XXXX	03-10-08				