

General Specifications

Motor Protection: Auto Restart/Polarity Protection
Insulation Resistance: 10M Ohm or over with a DC500V Megger
Dielectric Withstand Voltage: AC 700V 1st
Allowable Ambient Temperature Range:
-10 degree C ~ +70 degree C (Operating)
-40 degree C ~ +70 degree C (Storage)
(non-condensing environment)


Material

Casing: Plastic (Black) UL94V-0
Impeller: Plastic (Black) UL94V-0
Lead Wire: UL1007, AWG24, +Red, -Black


2408NL product picture




2408NL characteristic curve

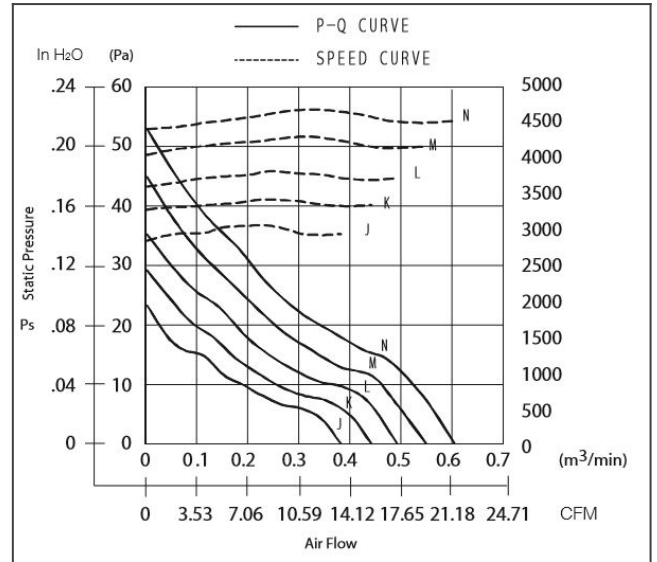

2408NL product drawing

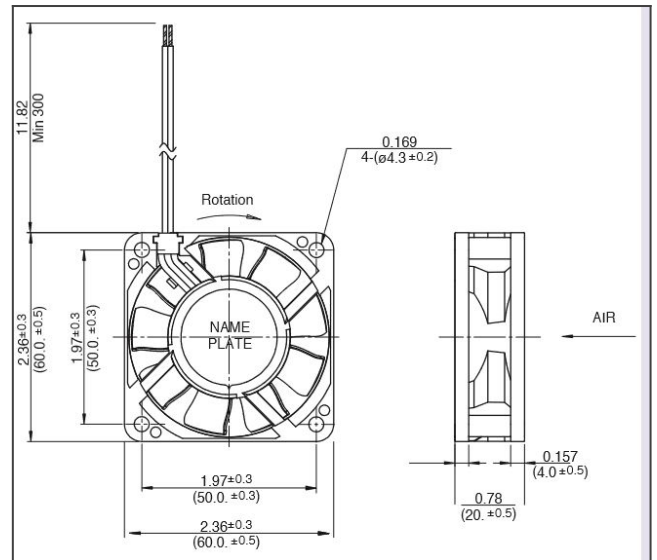

2408NL panel cut out

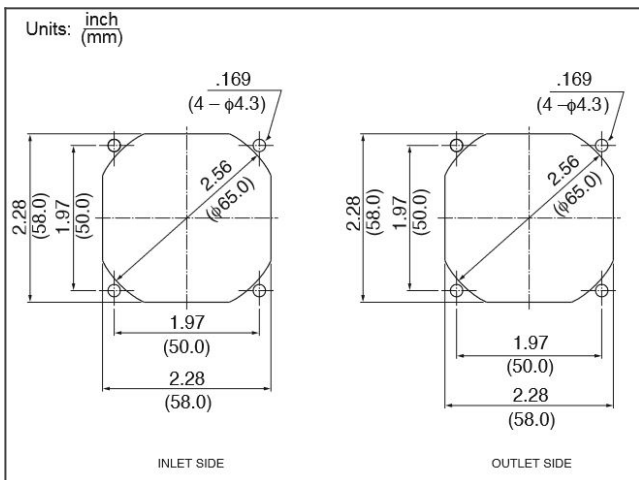

Detailed Specifications

Expected Life:	60 degree C 40,000 Hours (L10) AA/EA
DC Fan:	Ball Bearing Fan
Nominal Voltage:	24
Operating Voltage Lower:	15
Operating Voltage Upper:	27.6
Current:	0.055
Input Power:	1.32
Speed:	4400
Max. Air Flow:	0.5
Max. Air Flow:	17.6
Max. Static Pressure:	40.5
Max. Static Pressure:	0.16
Noise:	31.5
Mass:	85
Fan Size:	60
Fan Width:	20