




**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

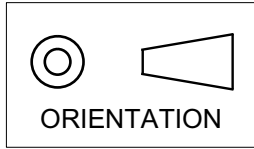

**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

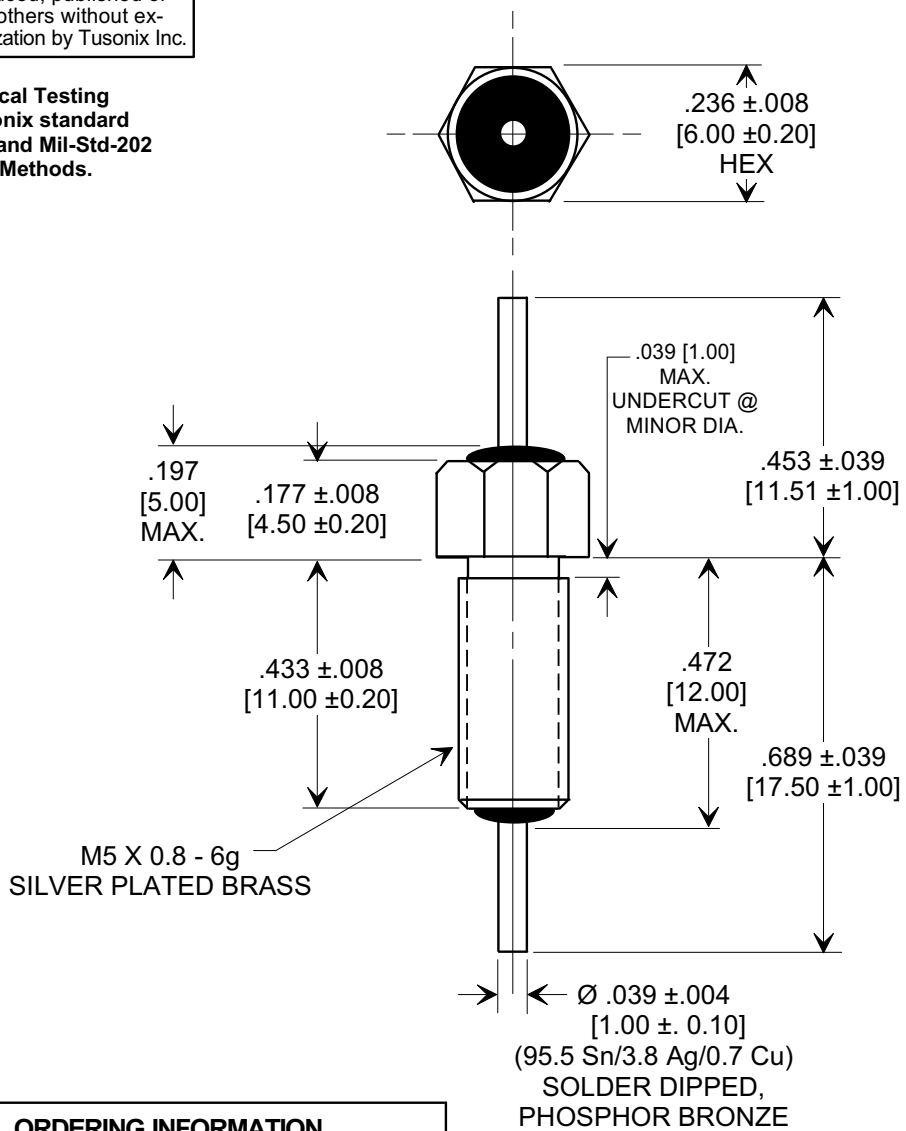

- NOTES:**
1. TUSONIX PART IS RoHS COMPLIANT.
  2. NO MOUNTING HARDWARE SUPPLIED.
  3. TUSONIX TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON HEX, GREEN INK.
  4. MOUNTING TORQUE: 3.5 LB IN. [0.395 N-M] MAX.

ORDERING INFORMATION	
TUSONIX STYLE	2499
VALUE	1000 pF
VALUE TOL.	+100% -0%
TEMP. COEF.	X7R
RATING	500VDC @ +85°C
OPERATING RANGE	-55°C TO +125°C
CURRENT	10 A
D.F. MAX.	2.5 %
DIELECTRIC WITHSTANDING	500 VAC, 60 SEC. 1000 VDC 1-5 SEC.

X-2015 Rev-0 REVISION RECORD Original Release ECO-1845 N.K. 12-10-10 <b>A</b>	--TOLERANCES-- Unless Otherwise Specified	Title <b>BUSHING TYPE FEED THRU CAPACITOR</b>	
	DECIMAL ± NOTED	Drawn N.K. 12-10-10	Scale 3 X
	ANGLES ±	Approved T.C. 12-10-10	
	<b>TUSONIX</b> TUCSON, ARIZONA	<b>A</b>	<b>2499-540-X7R0-102P</b>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[2499-540-X7R0-102PLF](#)