

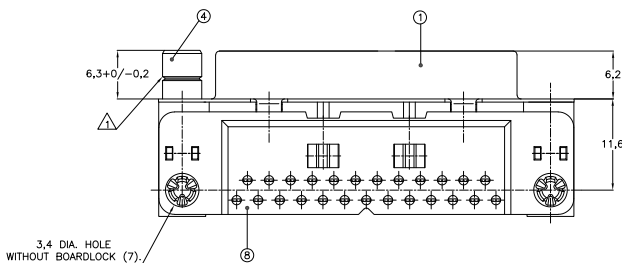



LOC		DIST		REVISIONS			
F	LNK	DATE	BY	APD			
J2		REVISED PER ECO-11-005294	02APR11	RK	HMR		

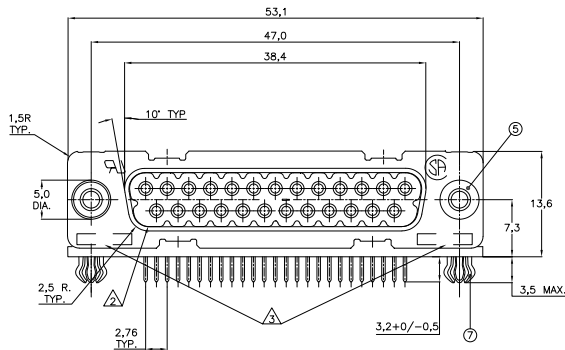

RECOMMENDED P.C. BOARD HOLE-LAYOUT

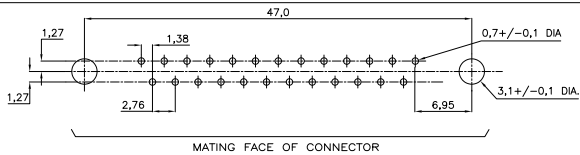

ACCESSORIES PREFIX	ITEM NO.	DESCRIPTION OF ACCESSORY									
			2	2	2	2	2	2	2	2	2
5		BUSHING WITH THROUGH HOLE 3,1 DIA.									
5		BUSHING WITH INNER THREAD 4-40 UNC									
5		BUSHING WITH INNER THREAD M3									
4		FEMALE SCREWLOCK WITH 4-40 UNC									
4		FEMALE SCREWLOCK WITH M3									
7		BOARDLOCK									

HOW TO ORDER:	PREFIX FOR ACCESSORIES	BASIC PARTNR.	SUFFIX FOR PLATING									
				0-XXXXX-Y	1-XXXXX-Y	2-XXXXX-Y	3-XXXXX-Y	4-XXXXX-Y	5-XXXXX-Y	6-XXXXX-Y	7-XXXXX-Y	8-XXXXX-Y

NOTES :
△ GROOVE INDICATES VERSION WITH 4-40 UNC INNER THREAD;
WITHOUT GROOVE INDICATES VERSION WITH M3 INNER THREAD.
△ CAVITY IDENTIFICATION AT FRONT SIDE ONLY.
△ PARTNUMBER AND DATE CODE.
4. AIR AND CREEPAGE DISTANCES ACCORDING TO DIN 41652.

- ITEM NRS./MATERIAL :
- ① SHELL : BRIGHT TINPLATED STEEL
 - ② HOUSING : GLASSFILLED POLYESTER, COLOR : BLACK
 - ③ CONTACTS : PHOSPHORBRONZE (PLATING : SEE TABLE ABOVE)
 - ④ FEMALE SCREWLOCK : TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3)
 - ⑤ BUSHING : TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3 OR 3,1 DIA THRU-HOLE)
 - ⑥ BRACKET : TINPLATED STEEL
 - ⑦ BOARDLOCK : TINPLATED PHOSPHORBRONZE
 - ⑧ POST ALIGNMENT PLATE : GLASSFILLED NYLON, COLOR : BLACK

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN D. KESSLER 14JAN99	TE Connectivity	
DIMENSIONS: mm		OW W. SOOMERS	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	APPLICATION SPEC	
0 RLC ±		WEIGHT	SIZE ONE CODE DRAWING NO	
1 RLC ±		HEIGHT	A2 00779 C=106507	
2 RLC ±		CUSTOMER DRAWING		
3 RLC ±		SCALE NTS		
4 RLC ±		SHEET 1 of 1		
ANGLES		REV J2		