

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD

G

REV / 0L20-0197-97

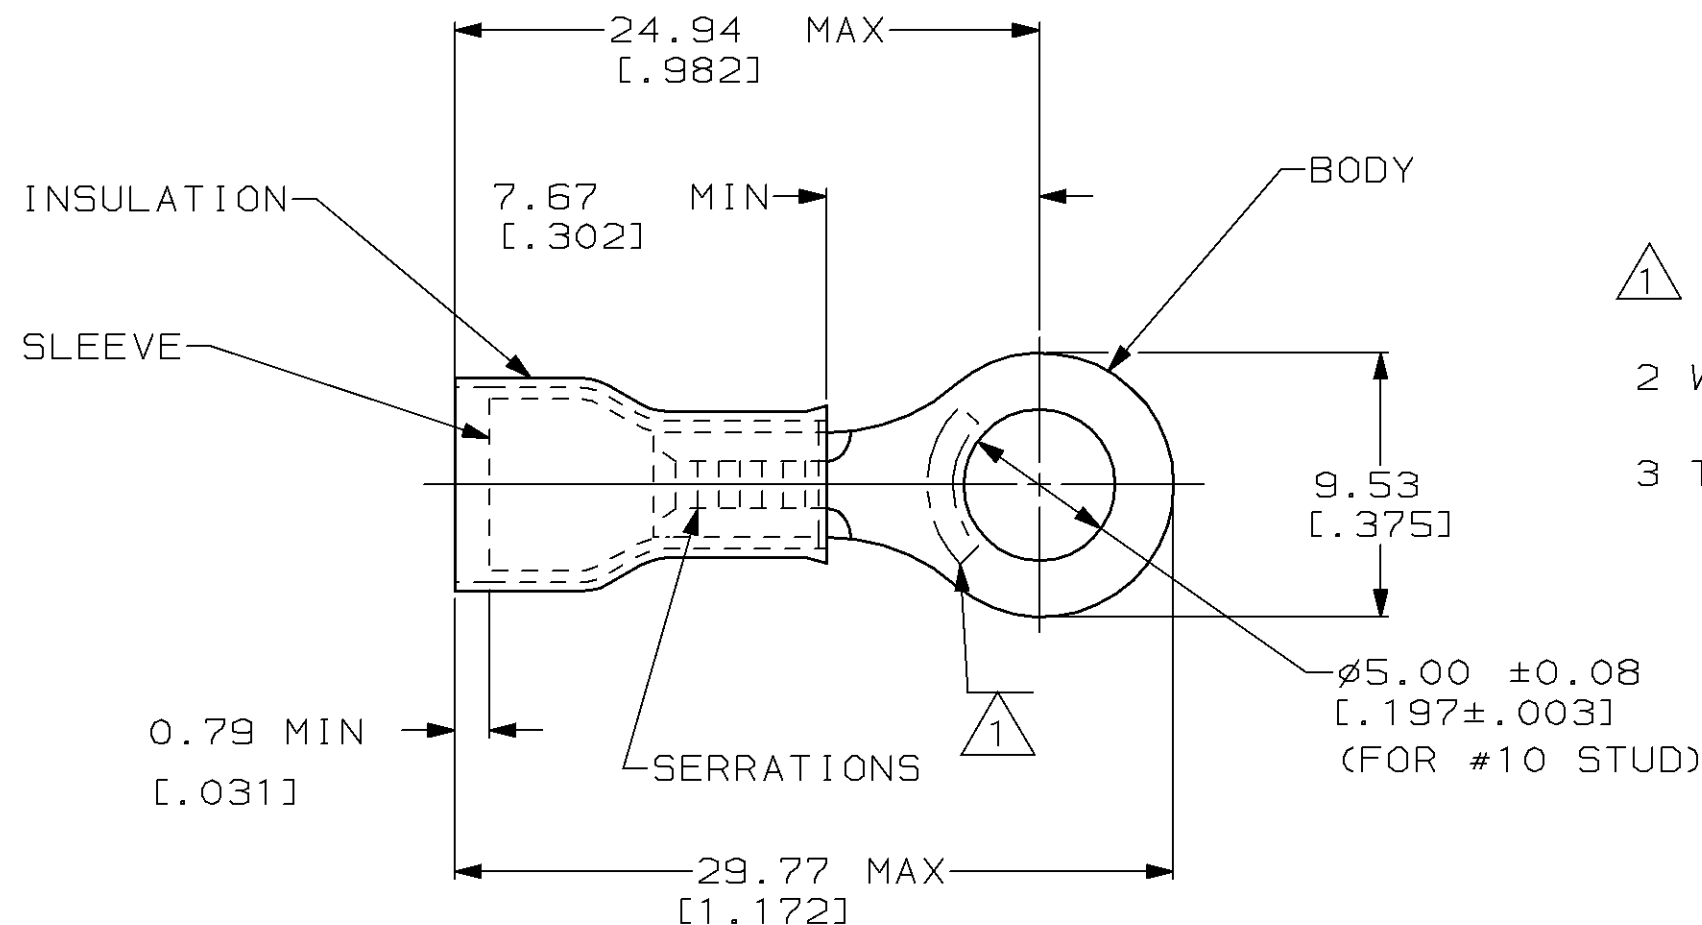
21AUG97

MLE

SB

AMP
WIRE RANGE

E13288

LR7189
Certified12-10 AWG
SOLID OR STRANDED12-10 AWG
SOLID OR STRANDED12-10 AWG
SOLID OR STRANDED

1 STAMP AMP 12-10* APPROX AS SHOWN

2 WIRE INSUL DIA, 4.32-7.62 [.170-.300]


3 TONGUE MATERIAL THK, 0.99±0.05 [.039±.002]

---	-----	-----
50	LOOSE PIECE, BOX	8-35364-2
1500	ON TAPE, REEL	2-35364-1
500	LOOSE PIECE	35364
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:
105° C (221° F)THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

mm [in]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-MATERIAL
BODY, SLV, COPPER PER ASTM B 152
INSUL, PVC, COLOR, YELLOWFINISH
BODY & SLV, TIN PLATE
PER ASTM B 545DWN
M ELLIS 17APR95CHK
C PRESNELL 17APR95APVD
N BIRCH 17APR95

PRODUCT SPEC

UL 486A

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608NAME
TERMINAL, RING TONGUE, PIDG™,
WIRE SIZE, 12-10 AWGSIZE
A3CAGE CODE
00779DRAWING NO
C-35364SCALE
4:1SHEET
1 OF 1REV
GFOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS
PRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATION
TOOLING ASSISTANCE CENTER
1-800-722-1111FOR ORDER ENTRY
1-800-526-5142VOLTAGE RATING:
-
300V MAXCIRCULAR MIL AREA:
2.63mm² - 6.64mm² [5180-13100]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-35364-1](#)