




THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION SEP. 1994.
COPYRIGHT 1994 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC J
DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
J		REVISED ECR-05-011201	16SEP05	L.Z	S.Y
J1		REV PER ECO-10-000443	18JAN10	KK	AEG

-4; AS SHOWN

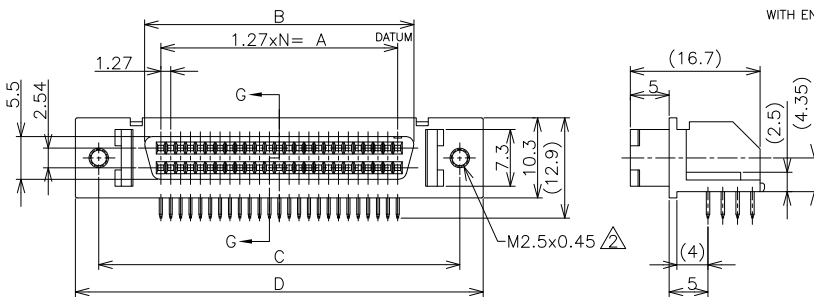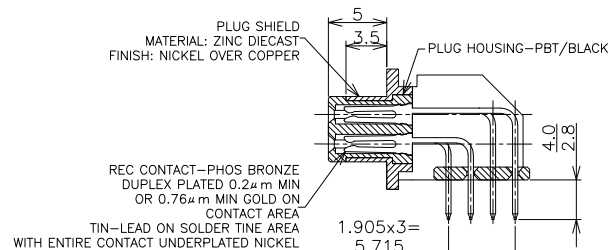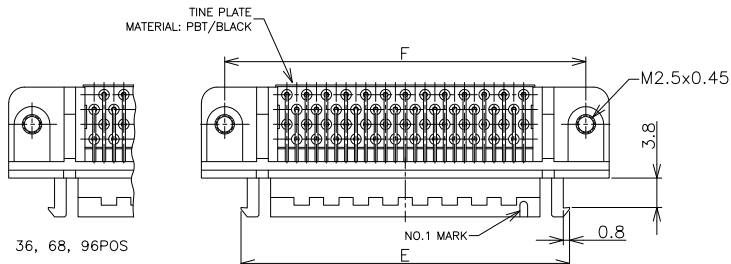

- 1 P.C BOARD HOLE LAY-OUT SEE FIG.1 AND QTY OF HOLE MUST BE COUNTED UP FROM DATUM LINE.
- △ USED SCREW SIZE; M2.5x0.45
- 3 CONNECTOR TO BE MATED:
X-174731-X, X-175707-X.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

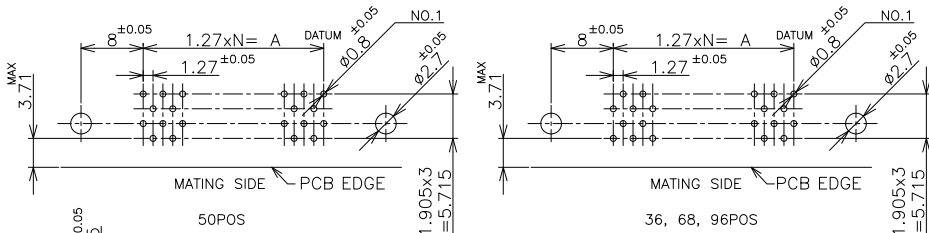

P.C. BOARD MOUNTING DIMENSIONS
FIG.1

TOP OF SOLDER TINE SHAPE
(SCALE 20:1)

GENERAL TOLERANCE
10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	
MATERIAL	SEE TABLE
SEE TABLE	SEE TABLE

DWN T.KAWAMAE CHK I.NENOMOTO APVD I.NENOMOTO PRODUCT SPEC 108-5238-2 APPLICATION SPEC WEIGHT CUSTOMER DRAWING	29MAR02 29MAR02 29MAR02 NAME SIZE CAGE CODE DRAWING NO A3 00779 C=174726 SCALE 2:1 SHEET 1 OF 1 REV J1	tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan PLUG HEADER (HORIZONTAL/M2.5) AMPLIMITE .050 SERIES II CONNECTOR TYPE A RESTRICTED TO
--	--	---

AMP 1470-19 REV 31MAR2000

11DEC03 11:32am FJOT0261