
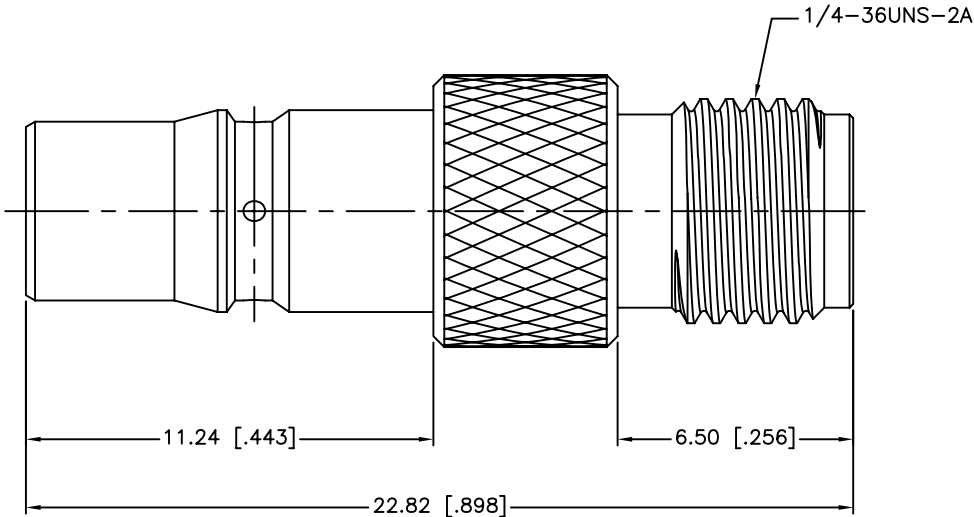


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/02/12	XXXXXX	INITIAL RELEASE

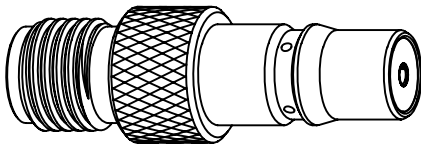

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-18 GHz
3. VSWR(RETURN LOSS): 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 100 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex												
					DRAWN M.ZHANG		05/02/12														
					CHECKED																
					ISSUED				PART DESCRIPTION QMA JACK TO SMA JACK ADAPTER (FOR 50 OHM)												
					SHEET 1 OF 1																
3					CONTACT PIN		BERYLLIUM COPPER		GOLD		1		PART NO. 242262								
2					INSULATOR		PTFE		NATURAL		1										
1					BODY		BRASS		NEXCOTE		1		DWG. NO. 242262.DWG					REV. NC	SIZE A	SCALE NA	
					DESCRIPTION		MATERIAL		FINISH		QTY										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[242262](#)