

Step 2 — Using a wire cutter, cut a short length of the scored line on each end of the break-away tab.

1. INTRODUCTION

Oversize Faceplate Adapters 2111332-[] are designed to be used with single-gang and double-gang faceplate kits in electrical box installations to cover a wall cutout up to 133.4 by 139.7 mm [5.25 by 5.50 in.] as shown in the illustration. For single-gang installation, the faceplate adapter is ready for use. For a double-gang installation, the break-away tabs must be removed.


To obtain information on AMP NETCONNECT products, call PRODUCT INFORMATION at the number at the bottom of this page or visit the AMP NETCONNECT website at www.ampnetconnect.com.

2. DESCRIPTION


The faceplate adapter features two break-away tabs (one on each side of the receptacle opening).

3. BREAK-AWAY TAB REMOVAL PROCEDURE


To use the faceplate adapter in a double-gang electrical box installation, perform the following:

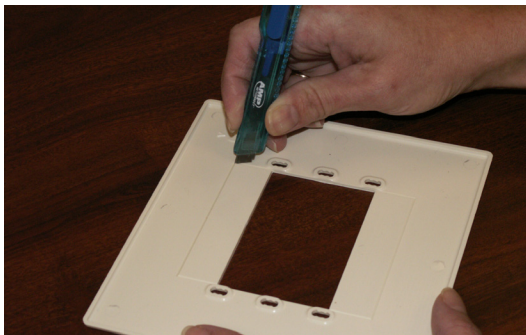

Step 1 — On the back of the faceplate adapter, use a utility blade to score the break-out lines on each end of the break-away tab.

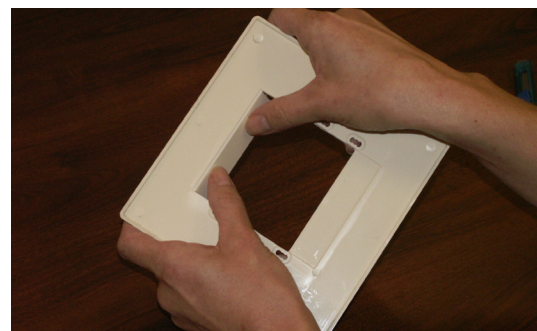

Step 3 — Bend the break-away tab until it releases from the faceplate adapter.

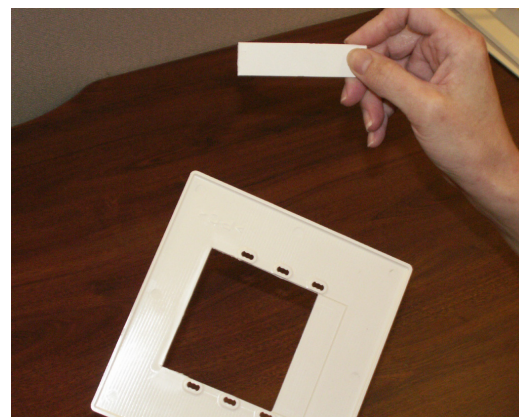

Step 4 — Discard the break-away tab.

Repeat these steps for the other break-away tab.

4. REPLACEMENT AND REPAIR

The faceplate adapter cannot be repaired. Do not use a damaged faceplate adapter.

5. REVISION SUMMARY

- Initial release of instruction sheet

AMP NETCONNECT logo is a trademark of TE.