

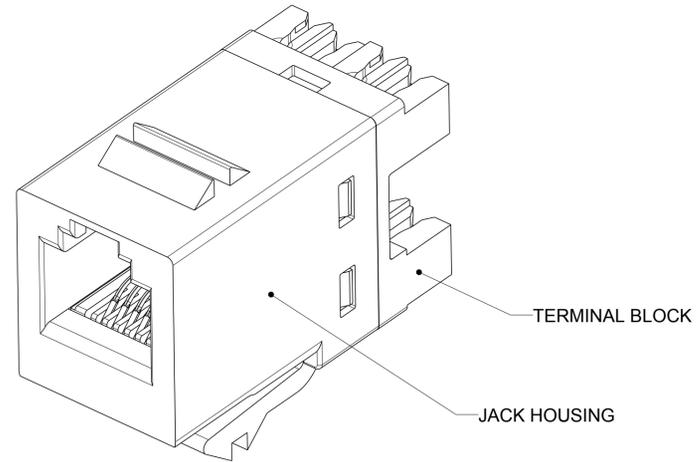


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
J		REV ECO-12-019894	12NOV2012	JM	SJ
J1		REV ECO-14-002629	29FEB2014	JM	SJ
J2		REV: MCO-40028537MCO	18FEB2016	HG	RA


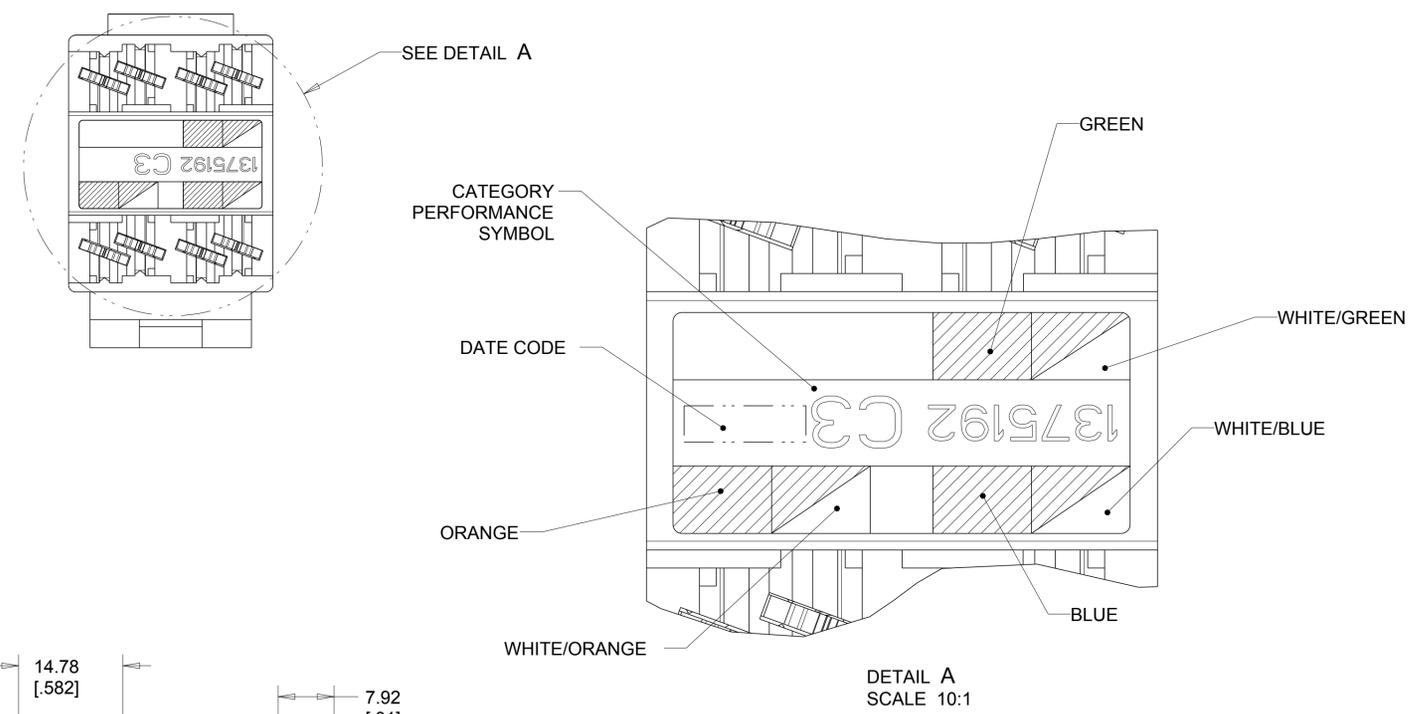


- 1 MATERIAL: JACK HOUSING - POLYCARBONATE, 94V-0 RATED.
 110 BLOCK - POLYCARBONATE.
 ARRAY TRAY - PBT POLYESTER.
 JACK CONTACTS ARRAY - BERYLLIUM COPPER, PLATED WITH
 1.27µm [.000050] MINIMUM THICK GOLD IN LOCALIZED
 AREA AND 3.81µm [.000150] MINIMUM THICK MATTE TIN IN
 BOARD INTERFACE AREA OVER 1.27µm [.000050] MINIMUM THICK
 NICKEL UNDERPLATE.
 IDC TERMINALS - PHOSPHOROUS BRONZE, PLATED WITH
 3.81µm [.00015] MINIMUM THICK MATTE TIN OVER
 1.27µm [.00005] MINIMUM THICK NICKEL UNDERPLATE.
 2. SL 110 JACK WILL TERMINATE 22-24 AWG SOLID AND 24-26 AWG
 STRANDED CONDUCTORS, 1.27[.050] MAXIMUM INSULATION DIAMETER.
 - 3 CAVITY CONFORMS TO FCC RULES AND REGULATIONS
 PART 68 SUBPART F REQUIREMENTS.
 4. MOUNTING PANEL THICKNESS 1.47 - 1.60 [.058 - .063].
 - 5 THESE TWO SUGGESTED CUTOUT OPENINGS ARE USED
 IN TANDEM WITH DUAL FRONT AND BACK CUTOUTS.
 - 6 ONE MODULAR JACK ASSEMBLY PER POLYBAG.
- REFER TO 408-8858 FOR TERMINATION INSTRUCTIONS USING SL
 SERIES TOOL TERMINATION. REFER TO 408-8602 FOR TERMINATION
 INSTRUCTIONS USING 110 PUNCH DOWN TOOL.

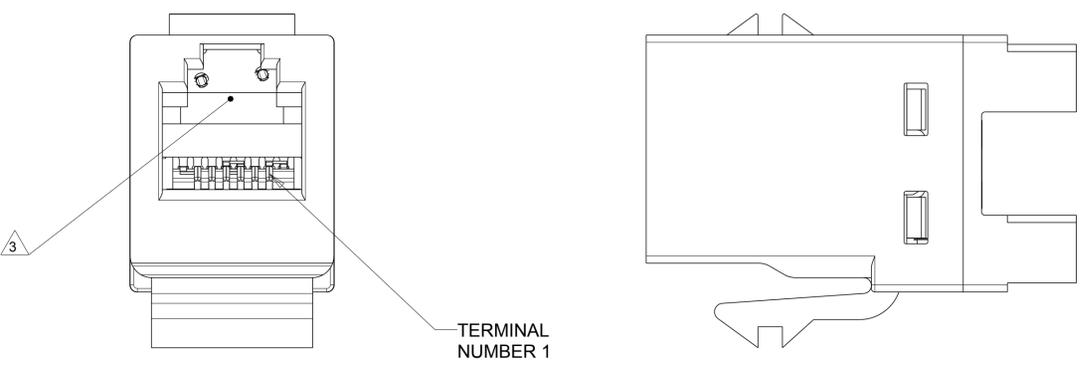

COLOR CODE	110 BLOCK	MODULAR JACK
WHITE/BLUE		4
BLUE		3
WHITE/ORANGE		2
ORANGE		5
WHITE/GREEN		1
GREEN		6
WHITE/BROWN		
BROWN		

ELECTRICAL SCHEMATIC (USOC)

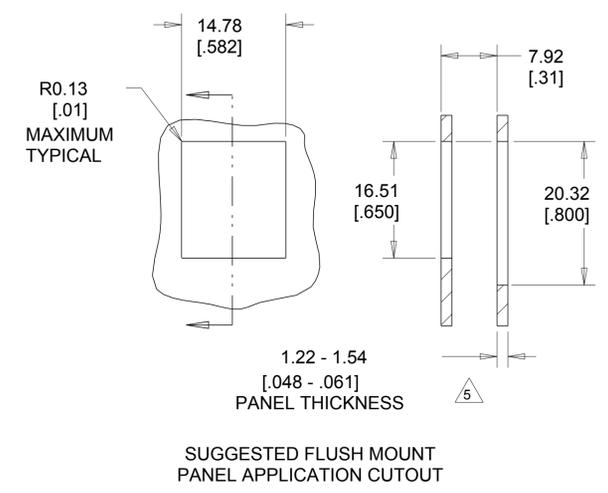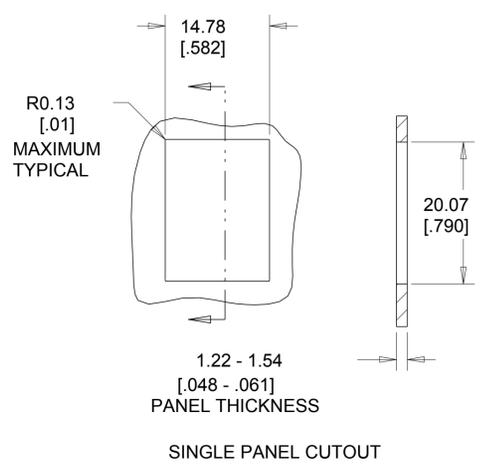

6	ALPINE WHITE	1-1375192-3
	BLACK	1375192-2
	LIGHT ALMOND	1375192-1
PACKAGE	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: T. PITTS 05NOV01
 CHK: L. SMITH 15NOV01
 APVD: C. DOOLEY 15NOV01

NAME: ASSEMBLY, SL 110 JACK, CATEGORY 3

PRODUCT SPEC: 108-131001

APPLICATION SPEC: 7

SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=1375192

RESTRICTED TO: -

MATERIAL: ALPINE WHITE

FINISH: -

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1 SHEET 1 OF 1 REV J2