

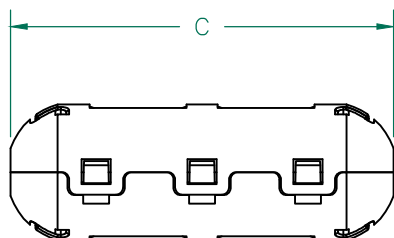


CORE DIMENSIONS

A	15.00 [.591]	+	0.50 [.020]
B	6.55 [.258]	+	0.30 [.012]
C	39.78 [1.566]	+	0.60 [.024]
D	7.16 [.282]	+	0.35 [.014]

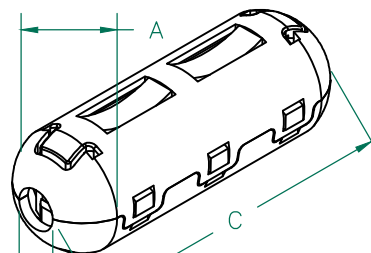


CASE DIMENSIONS:

A	18.75 [.738]	+	REF.
B	6.75 [.266]	+	REF.
C	52.91 [2.083]	+	REF.
D	18.75 [.738]	+	REF.
E	3.24 [.128]	+	REF.

IMPEDANCE (Z)

Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	186 Ω	407 Ω	575 Ω
Minimum	- Ω	305 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

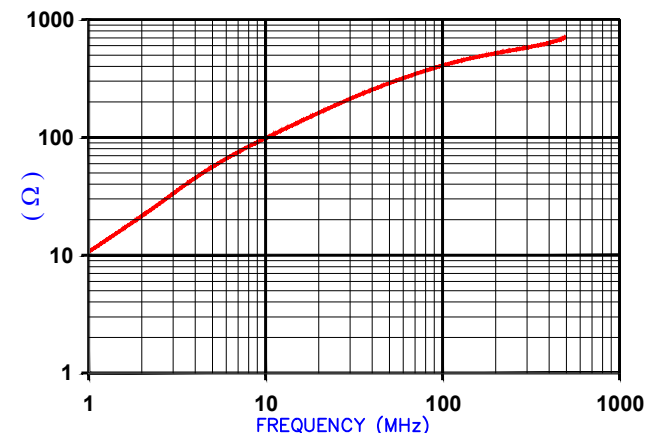

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 4095

**UNCONTROLLED
DOCUMENT**

NOTES:

1. ASSEMBLED PART #: 28A0593-0A2
2. CASE COLOR: BLACK-0A2.
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
K	UPDATED CORE TOL	12/23/15	Jcai	PROJECT/PART NUMBER: 28A0593-0A2			
J	UPDATED Z SPEC	11/24/14	Jcai				
H	UPDATED NOTE 3	09/15/10	JUN	DATE: 04/28/04			
G	ADD NOTES 3 AND 4	01/27/09	JRK				
F	ADD MISSING DIM CALLOUTS "D & E" TO CASE UPDATE COMPANY LOGO	05/07/08	TMB	SCALE: N.T.S.			
E	UPDATE 100MHz MINIMUM VALUE UPDATE COMPANY LOGO TOLERANCES TO REF VIEWS UPDATE NOTES	06/26/07	TMB				
D	REV CASE DIM C TO MATCH CASE PRINT	01/11/07	TMB	TOOL # -			
REV	DESCRIPTION	DATE	INT				

Laird

REV **K** PART TYPE: **FERRITE SNAP-ON** DRAWN BY: **TMB**

MATERIAL: **Ferrite**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird:

[28A0593-0A2](#)