

CT 10-18S+F/PE-24

Order No.: 2807913




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2807913>

LSA-PLUS plug (COMTRAB CT 10) with surge voltage fine protection for 18 signal lines - GND and coarse protection GND - PE. Nominal voltage: 24 V DC/AC. Design: 10 double wires



Commercial data

GTIN (EAN)	 4 017918 075392
Note	Made-to-order
sales group	J462
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 121 (TT-2011)

Product notes

WEEE/RoHS-compliant since:
05/18/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Housing material	PBT
Inflammability class acc. to UL 94	V0
Color	black

Standards for air and creepage distances	VDE 0110-1
	IEC 60664-1: 1992-10
Surge voltage category	II
Pollution degree	2
Total surge current (8/20) μ s	5 kA
Ambient temperature (operation)	-25 °C ... 75 °C
Mounting type	On CT-TERMIBLOCK and LSA-PLUS disconnect strip
Design	LSA-PLUS module
Degree of protection	IP20
Direction of action	Line-Signal Ground/Shield & Signal Ground/Shield-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.00
Width	111.00 mm
Height	68.50 mm
Length	22.00 mm

Protective circuit

IEC category	C1
	C2
	C3
Nominal voltage U_N	24 V DC
Maximum continuous operating voltage U_C	40 V DC
	28 V AC
Maximum continuous voltage U_C (wire-GND)	40 V DC
	28 V AC
Nominal current I_N	1.5 A (75°C)
Operating effective current I_C at U_C	$\leq 5 \mu$ A (a,b-GND)
Ground conductor current I_{PE}	$\leq 1 \mu$ A
Nominal discharge surge current I_n (8/20) μ s (Core-Earth)	119 A
Nominal discharge surge current I_n (8/20) μ s (Core-GND)	119 A
Total surge current (8/20) μ s	5 kA
Max. discharge surge current I_{max} (8/20) μ s maximum (Core-Earth)	119 A (25°C)
Max. discharge surge current I_{max} (8/20) μ s maximum (Core-GND)	119 A (25°C)

Nominal pulse current I_{an} (10/1000) μ s (Core-GND)	23 A (25°C)
Output voltage limitation at 1 kV/ μ s (Core-Earth) spike	\leq 750 V
Output voltage limitation at 1 kV/ μ s (Core-GND) spike	\leq 70 V
Output voltage limitation at 1 kV/ μ s (Core-Earth) static	\leq 750 V
Output voltage limitation at 1 kV/ μ s (Core-GND) static	\leq 60 V
Residual voltage at I_n , (conductor-GND)	\leq 85 V
Residual voltage with I_{an} (10/1000) μ s (conductor-GND)	\leq 65 V
Response time t_A (Core-Earth)	\leq 1 ns
	\leq 100 ns
Input attenuation a_E , asym.	0.1 dB (Typ. up to 1 MHz / 50 Ω)
	0.1 dB (Typ. up to 200 kHz / 150 Ω)
	0.1 dB (Typ. up to 70 kHz / 600 Ω)
Cut-off frequency f_g (3 dB), asym. (GND) in 50 Ohm system	7 MHz (typ.)
Cut-off frequency f_g (3 dB), asym. (GND) in 150 Ohm system	2.5 MHz (typ.)
Cut-off frequency f_g (3 dB), asym. (GND) in 600 Ohm system	500 kHz (typ.)
Capacity (Core-GND)	1.1 nF ($f=1$ MHz / $V_R=0$ V)
Capacity (Core-Earth)	1 pF

Connection data

Connection method	can be plugged into COMTRAB-TERMIBLOCK and LSA-PLUS disconnect and switching strips
Connection type IN	COMTRAB plug-in system
Connection type OUT	COMTRAB plug-in system

Connection, protective circuit

Standards/regulations	IEC 61643-21
-----------------------	--------------

Certificates / Approvals



Certification GOST

Accessories

Item	Designation	Description
------	-------------	-------------

Assembly

0441711	CT-TERMIBLOCK 10 DA	Screw termination block with disconnect contacts for accommodating protective plugs CT and CTM. Use in MCR and telecommunications systems. Design: 10 double wires
---------	---------------------	--

Additional products

Item	Designation	Description
------	-------------	-------------

Assembly


2839295	SSA 3-6	shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black
2839512	SSA 5-10	Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black

General


2765372	CT 10-MB/ 3	Mounting clip, for holding 3 disconnect or ground wire strips. Version: 10 double conductors, dimensions: A 104.5 mm, B 65 mm.
2765385	CT 10-MB/10	Mounting clip, for holding 10 disconnect or ground wire strips. Version: 10 double conductors, dimensions: A 104.5 mm, dimensions B 245.5 mm
2765356	CT 10-TL	LSA-PLUS disconnect strip to hold the CTM and CT 10 protection modules. Version: 10 double conductors, dimension A: 124 mm.
2765518	CT-KDT	Cable bush for assembly troughs, for protection of the lines guided through the laminated frame

Diagrams/Drawings

Dimensioned drawing

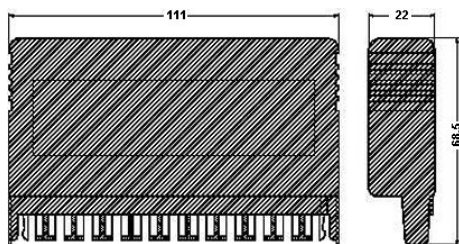

Circuit diagram

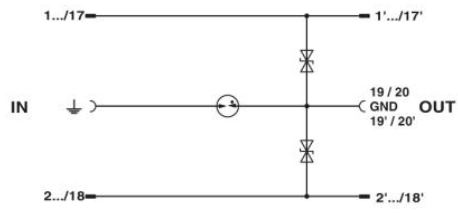

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;