

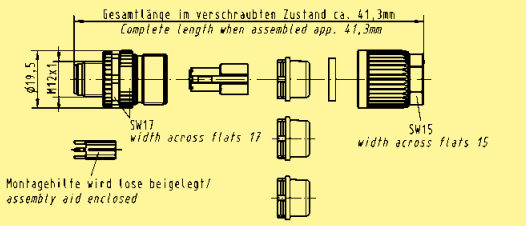
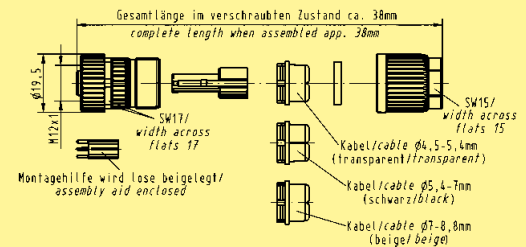

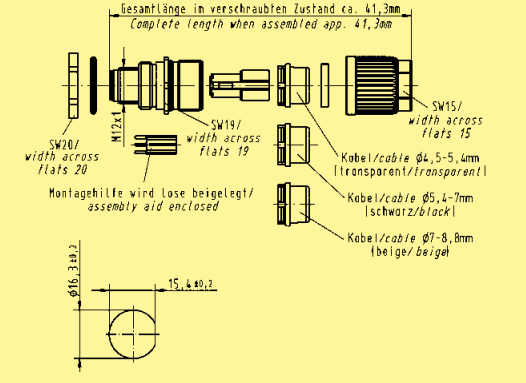

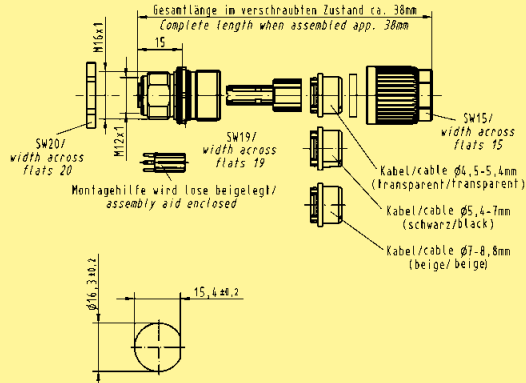


Circular connector M12 shielded, D-coded



Circular Connectors

Identification	Male	Part No.	Female	Drawing	Dimensions in mm
Han® M12 Crimp D-coded new shielding termination   angled version	21 03 882 1405 21 03 882 1415			 <p>Gesamtlänge im verschraubten Zustand ca. 41,3mm Complete length when assembled app. 41,3mm</p> <p>SW17 width across flats 17 SW15 width across flats 15</p> <p>Montagehilfe wird lose beigelegt/ assembly aid enclosed</p>	
			21 03 882 2405	 <p>Gesamtlänge im verschraubten Zustand ca. 38mm complete length when assembled app. 38mm</p> <p>SW17/ width across flats 17 SW15/ width across flats 15</p> <p>Kabel/cable ϕ4,5-5,4mm (transparent/transparent) Kabel/cable ϕ5,4-7mm (schwarz/black) Kabel/cable ϕ7-8,8mm (beige/beige)</p> <p>Montagehilfe wird lose beigelegt/ assembly aid enclosed</p>	
Han® M12 panel feed-through Crimp D-coded 	21 03 882 1425			 <p>Gesamtlänge im verschraubten Zustand ca. 41,3mm Complete length when assembled app. 41,3mm</p> <p>SW20/ width across flats 20 SW19/ width across flats 19 SW15/ width across flats 15</p> <p>Kabel/cable ϕ4,5-5,4mm (transparent/transparent) Kabel/cable ϕ5,4-7mm (schwarz/black) Kabel/cable ϕ7-8,8mm (beige/beige)</p> <p>Montagehilfe wird lose beigelegt/ assembly aid enclosed</p> <p>ϕ15,3±0,2 15,4±0,2</p>	
Han® M12 panel feed-through Crimp D-coded 			21 03 882 2425	 <p>Gesamtlänge im verschraubten Zustand ca. 38mm Complete length when assembled app. 38mm</p> <p>SW20/ width across flats 20 SW19/ width across flats 19 SW15/ width across flats 15</p> <p>Kabel/cable ϕ4,5-5,4mm (transparent/transparent) Kabel/cable ϕ5,4-7mm (schwarz/black) Kabel/cable ϕ7-8,8mm (beige/beige)</p> <p>Montagehilfe wird lose beigelegt/ assembly aid enclosed</p> <p>ϕ16,3±0,2 15,4±0,2</p>	

03
38

Order crimp contacts separately

Stock items in bold type