


INSULATED BANANA PLUGS

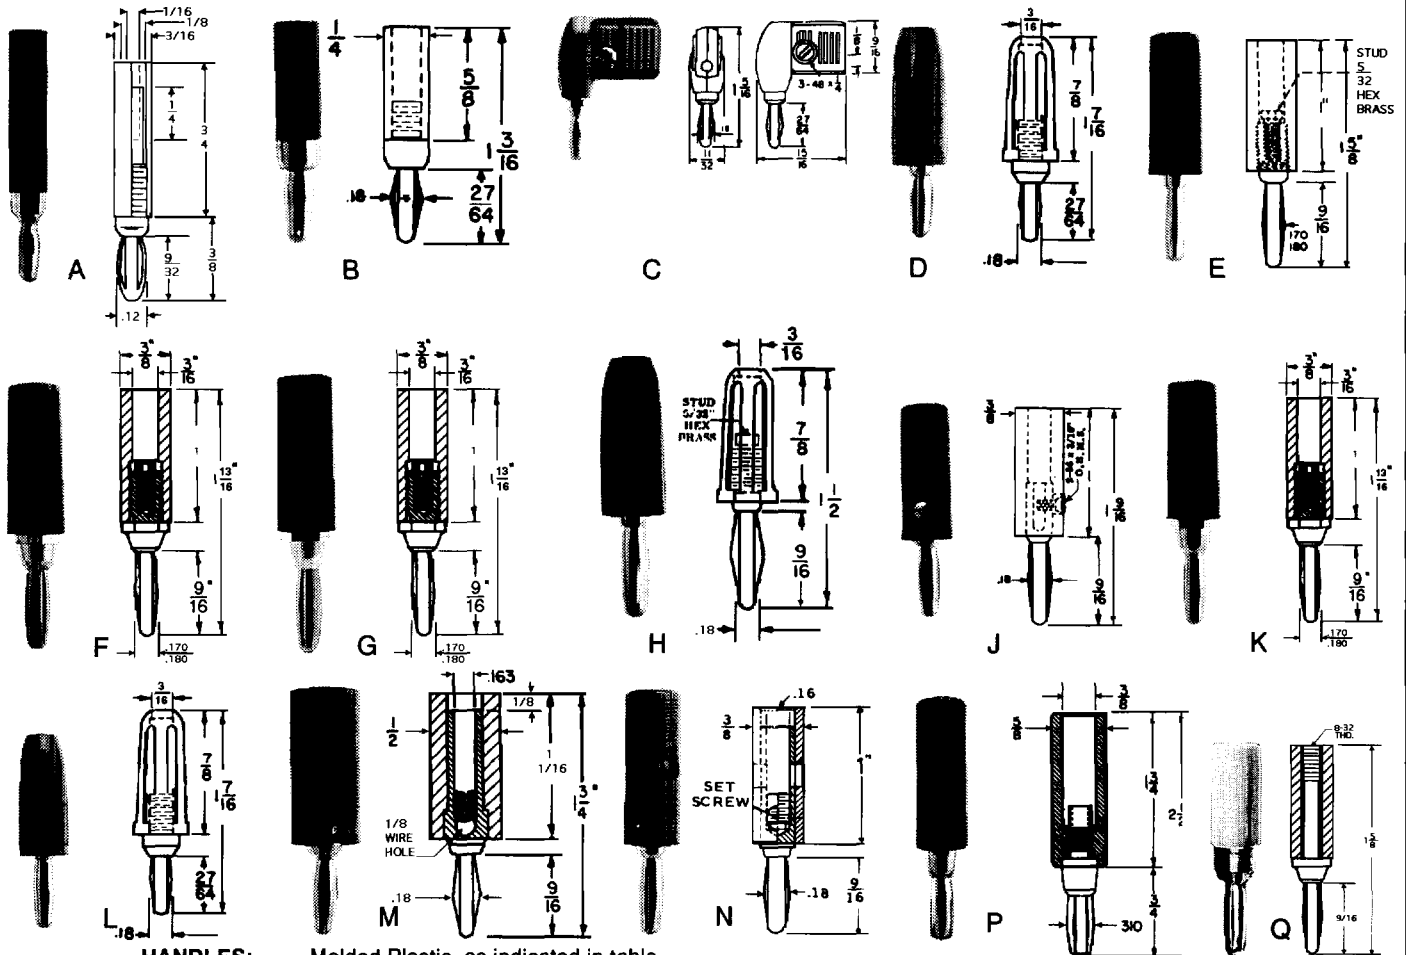

HANDLES:
BODY:
SPRING:
COLORS:
(see chart)

Molded Plastic, as indicated in table
Brass, Nickel-plated.

Beryllium copper, except for #388 which is Inconel.

A: Available in Red and Black. Add color number as suffix to part number.

-102 Red -103 Black

B: Available in 6 colors. Add color number as suffix to part number.

-101 White -102 Red -103 Black -104 Green -105 Blue -107 Yellow




C: Available in 10 colors. Add color number as suffix to part number.

-101 White -102 Red -103 Black -104 Green -105 Blue
-106 Orange -107 Yellow -108 Brown -112 Violet -113 Gray

PART NO.	ILLUS.	SPRING TYPE	HANDLE	COLORS	WIRING	RATING		
268	A	Miniature	Nylon	A	Solder Well	2 Amps - 600V		
291	B	Short	ABS			10 Amps - 800V		
255	C		Polycarbonate			10 Amps - 1 KV		
426	D	Standard	Polycarbonate	C	Stud or Well	15 Amps - 1 KV		
211	E		Nylon	B				
212	F							
388	G							
476	H		Polycarbonate	C			Side Screw	
204	J		Nylon	B	Solderless			
295	K		Polycarbonate	C			Clamp Screw	
455	L							
324	M		ABS		A			
1512	N							
285	P	Giant	Nylon	Solder Well	25 Amps - 2 KV			
214	Q	Standard	Nylon		8-32 thread	15 Amps		

Stacking

UNINSULATED BANANA PLUGS

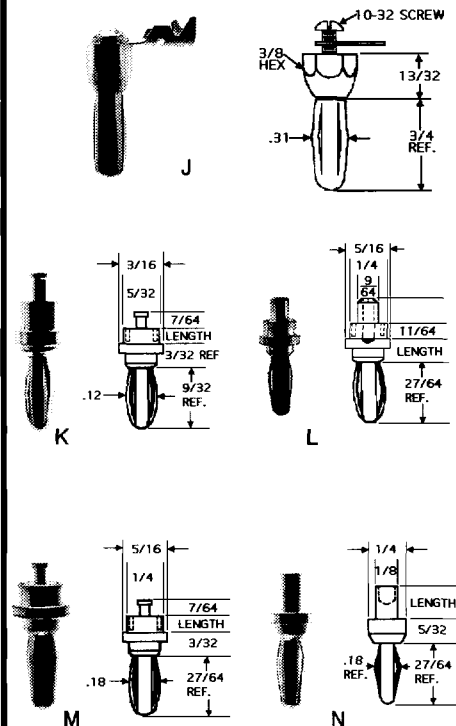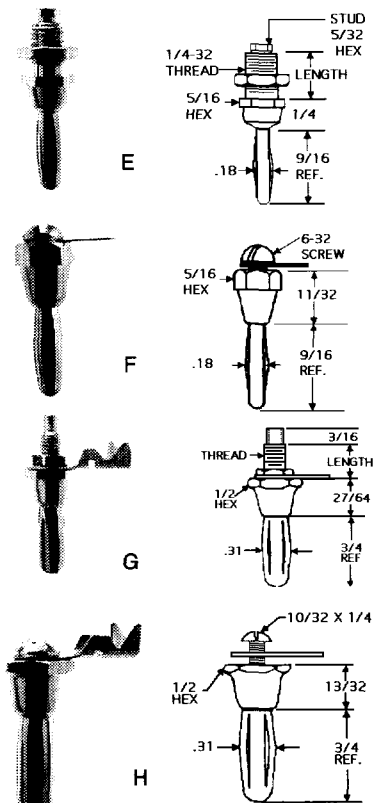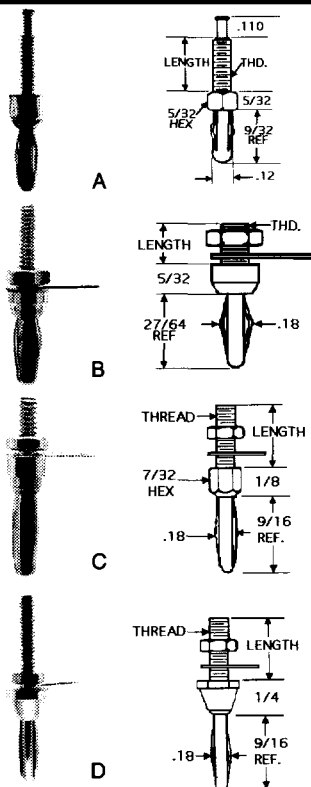

WITH THREADED MALE STUDS

BODY: Brass, Nickel Plated
SPRING: Beryllium Copper Nickel Plated
MOUNTING: Threaded stud and nut (supplied).
WIRING: Wire solders to lug under nut.

PART NO.	ILLUS.	TYPE	STUD		AMPS AC	
			THREAD	LENGTH		
192	A	Miniature	2-56	17/64	5	
460	B	Short Std.	4-40	3/8	10	
461				1/2		
462				3/8		
463				1/2		
401	C	Standard	6-32	3/8	15	
103				1/2		
404				3/4		
405				3/8		
406				1/2		
407	D		8-32	3/4		
102				3/8		
432				1/2		
433				3/4		
434				3/8		
435	E		8-32	1/2		
436				3/4		
145				1/4-32		
100	F		6-32	Hole		
185	G	Giant	1/4-28	13/32	25	
186	H		10-32	Hole		
188	J					

WITH RIVET STUD

BODY: Brass,
PLATING: "See Table"
SPRING: Beryllium Copper
MOUNTING: Bodies rivet to panel or board.
WIRING: Wraps around turret or to solder wall.

PART NO.	ILLUS.	TYPE	PANEL THKNS.	LENGTH	RATING AMPS AC	PLATING
2073	K	Miniature	1/32	.093	5	Silver
191			1/16	.109		
2074			3/32	.135		
2075			1/8	.165		
2067	L	Short Std.	1/16	.109	10	Tin
2068			3/32	.135		
2069			1/8	.165		
2082	M	Short Std.	1/16	.109	10	Tin
2083			3/32	.135		
2084			1/8	.165		
121	N	Short Std.	3/16	7/32	10	Silver
143			1/8	3/16		
139			3/32	1/8		