




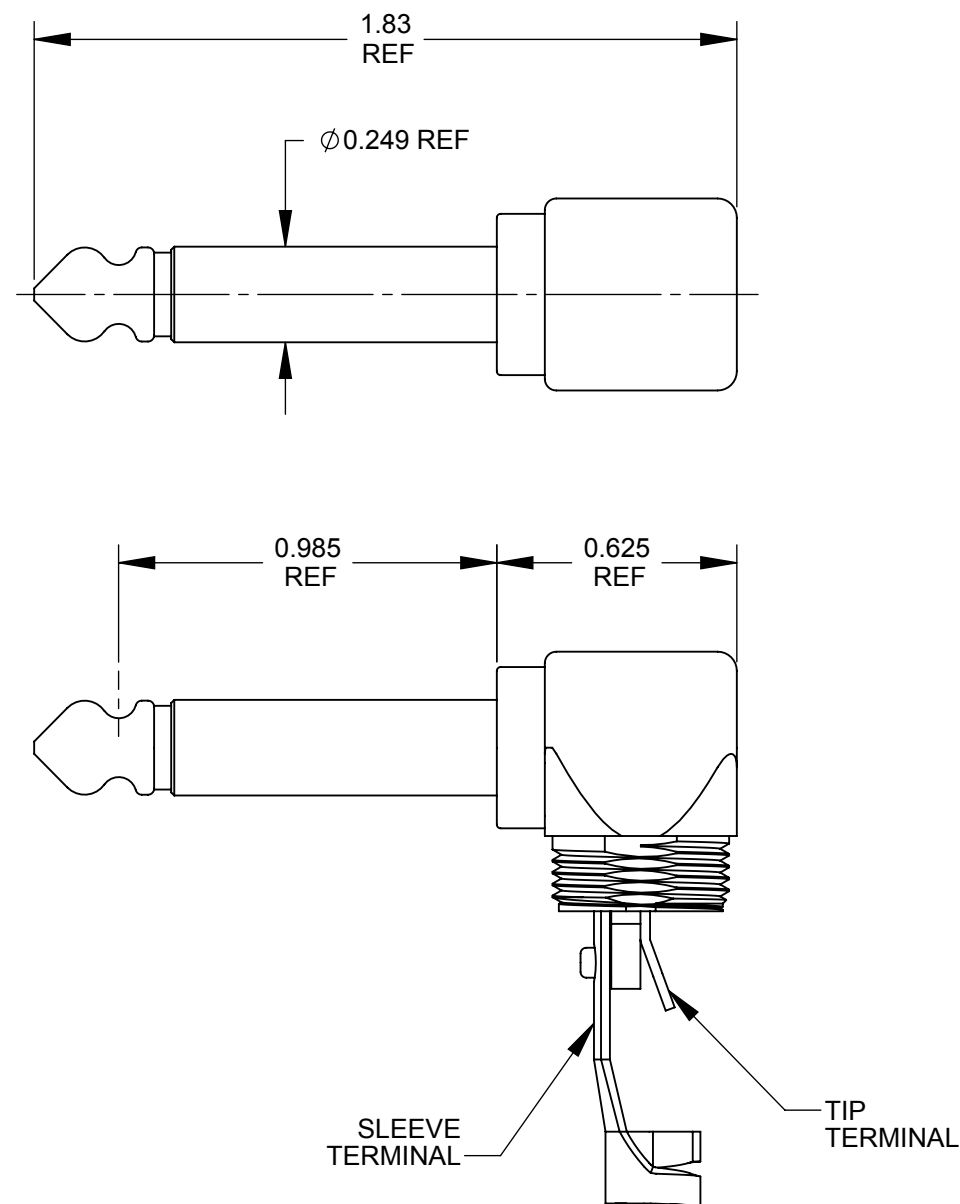

VIEW WITHOUT HANDLE AND INSULATOR

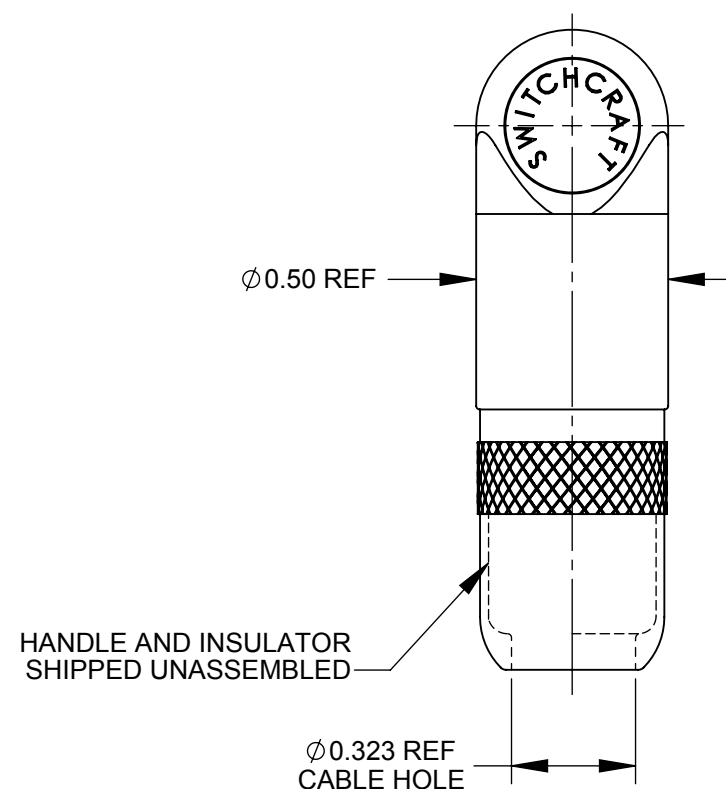

HANDLE AND INSULATOR
SHIPPED UNASSEMBLED

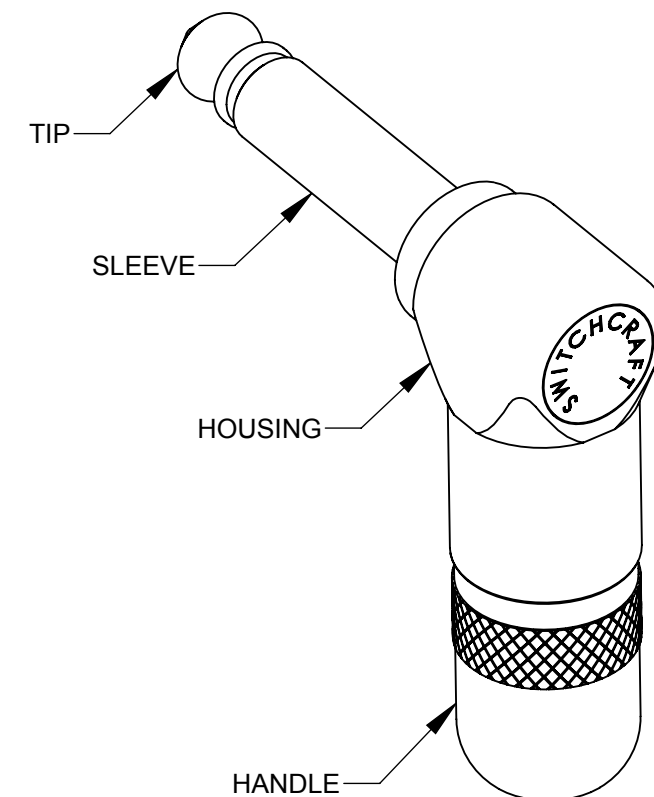

NOTES:

1. MATERIALS:
- TIP ROD AND HANDLE - BRASS, NICKEL PLATED
 - HOUSING AND SLEEVE - ZINC DIE CAST, COPPER AND NICKEL PLATED
 - TIP TERMINAL - BRASS, TIN PLATED
 - SLEEVE (CLAMP) TERMINAL - STEEL, TIN PLATED
 - INSULATION - THERMOPLASTIC

ELECTRICAL

- DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC
- INSULATION RESISTANCE: 50,000 MEGOHMS MINIMUM (INITIAL)

OPERATING TEMPERATURE

- 20°C TO +65°C

MATING JACK

- TYP, 1/4 INCH, COMMERCIAL TYPE, 2 CONDUCTOR PHONE JACK

2. THIS PRODUCT IS RoHS COMPLIANT

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
						SIZE *	WIDTH *	MULT *	LBS/M *	TEMPER *	
						FINISH *			MATERIAL *		
						SPEC No. *			SPEC No. *		
						FIRST USED ON *		SCALE 2:1		Switchcraft®	
						DATE DRAWN	BY	CHKD	APVD		
						04-21-08	BDS	BDS	BDS		
								04-21-08	04-21-08		
A	REL TO PROD 25868	10-28-09	JEB	TJK							SHEET 1 OF 1
REV	ECO NUMBER	DATE	BY	APVD		NAME RA PHONE PLUG, Ø 0.323 CABLE. RoHS					PART No. 226L
REVISIONS					DO NOT SCALE DRAWING						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Switchcraft:](#)

[226L](#)