

Surface Mount Type OS-CON

Series : **SVQP**


Features

- 125 °C 1000 h
- RoHS compliance, Halogen free

Specifications

Size code	C6	E7
Category temperature range	-55 °C to +125 °C	
Rated voltage range	4 V.DC to 20 V.DC	6.3 V.DC to 20 V.DC
Rated capacitance range	22 μ F to 150 μ F	47 μ F to 220 μ F
Capacitance tolerance	± 20 % (120 Hz / + 20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Endurance	+125 °C, 1000 h, rated voltage applied	
	Capacitance change	Within ± 20 % of the initial value
	tan δ	≤ 200 % of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady State)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage	
	Capacitance change	Within ± 20 % of the initial value
	tan δ	≤ 150 % of the initial limit
	DC leakage current	Within the initial limit (after voltage processing)

Marking

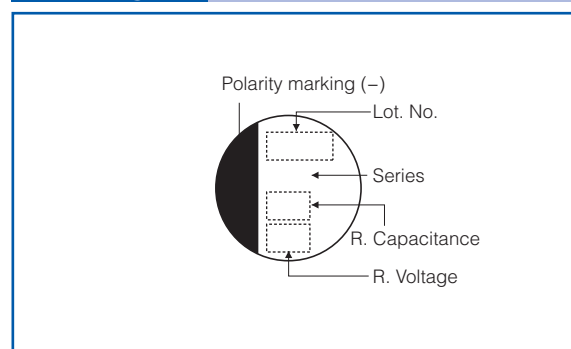

Dimensions (not to scale)

Size code	$\phi D \pm 0.5$	$L \begin{smallmatrix} +0.1 \\ -0.4 \end{smallmatrix}$	$W \pm 0.2$	$H \pm 0.2$	$C \pm 0.2$	R	$P \pm 0.2$
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2

* Externals of figure are the reference.

Characteristics list

Series	Rated voltage (V.DC)	Rated capacitance (μ F)	Case size (mm)		Size code	Specifications					Standard (Reel size : $\phi 380$)	
			ϕD	L		Ripple current*1 (mA r.m.s.)	Allowable*1 ripple current (mA r.m.s.)	ESR*2 (m Ω max.)	tan δ *3	LC*4 (μ A)	Part number	Min. Packaging Q'ty (pcs)
SVQP	4.0	150	6.3	5.9	C6	572	1810	40	0.12	300	4SVQP150M	1000
		82	6.3	5.9		538	1700	45	0.12	258	6SVQP82M	1000
		100	6.3	5.9		572	1810	40	0.12	315	6SVQP100M	1000
		220	8.0	6.9	E7	810	2560	35	0.12	693	6SVQP220M	1000
	6.3	56	6.3	5.9	C6	538	1700	45	0.12	280	10SVQP56M	1000
		120	8.0	6.9		810	2560	35	0.12	600	10SVQP120M	1000
		150	8.0	6.9		810	2560	35	0.12	750	10SVQP150M	1000
		39	6.3	5.9	E7	512	1620	50	0.10	312	16SVQP39M	1000
	10	82	8.0	6.9		670	2120	40	0.12	656	16SVQP82M	1000
		22	6.3	5.9		459	1450	60	0.10	220	20SVQP22M	1000
		47	8.3	6.9		598	1890	45	0.12	470	20SVQP47M	1000

*1 Ripple current (100 kHz / +105 °C < T_x $\leq$ 125 °C), Allowable ripple current (100 kHz / T_x $\leq$ 105 °C)

*2 ESR (100 kHz to 300 kHz / +20 °C) *3 tan δ (120 Hz / +20 °C) *4 After 2 minutes

◆ Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

Frequency correction factor for ripple current

Frequency	120 Hz $\leq f < 1$ kHz	1 kHz $\leq f < 10$ kHz	10 kHz $\leq f < 100$ kHz	100 kHz $\leq f < 500$ kHz
Coefficient	0.05	0.3	0.7	1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[10SVQP56M](#) [10SVQP150M](#) [6SVQP220M](#) [20SVQP22M](#) [16SVQP82M](#) [16SVQP39M](#) [20SVQP47M](#) [10SVQP120M](#)
[6SVQP100M](#) [6SVQP82M](#) [4SVQP150M](#)