

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP ,2007.


© COPYRIGHT 2007 By --

ALL RIGHTS RESERVED.



LOC
ESDIST
/

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-12-004002	01MAR2012	W.W	C.W

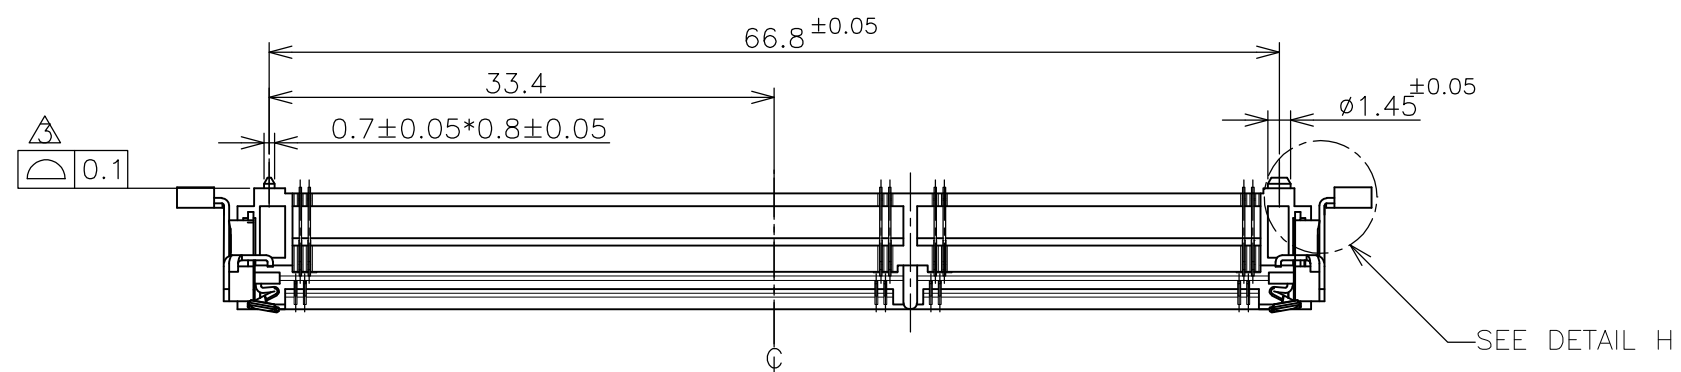

HOW TO MATE AND UNMATE

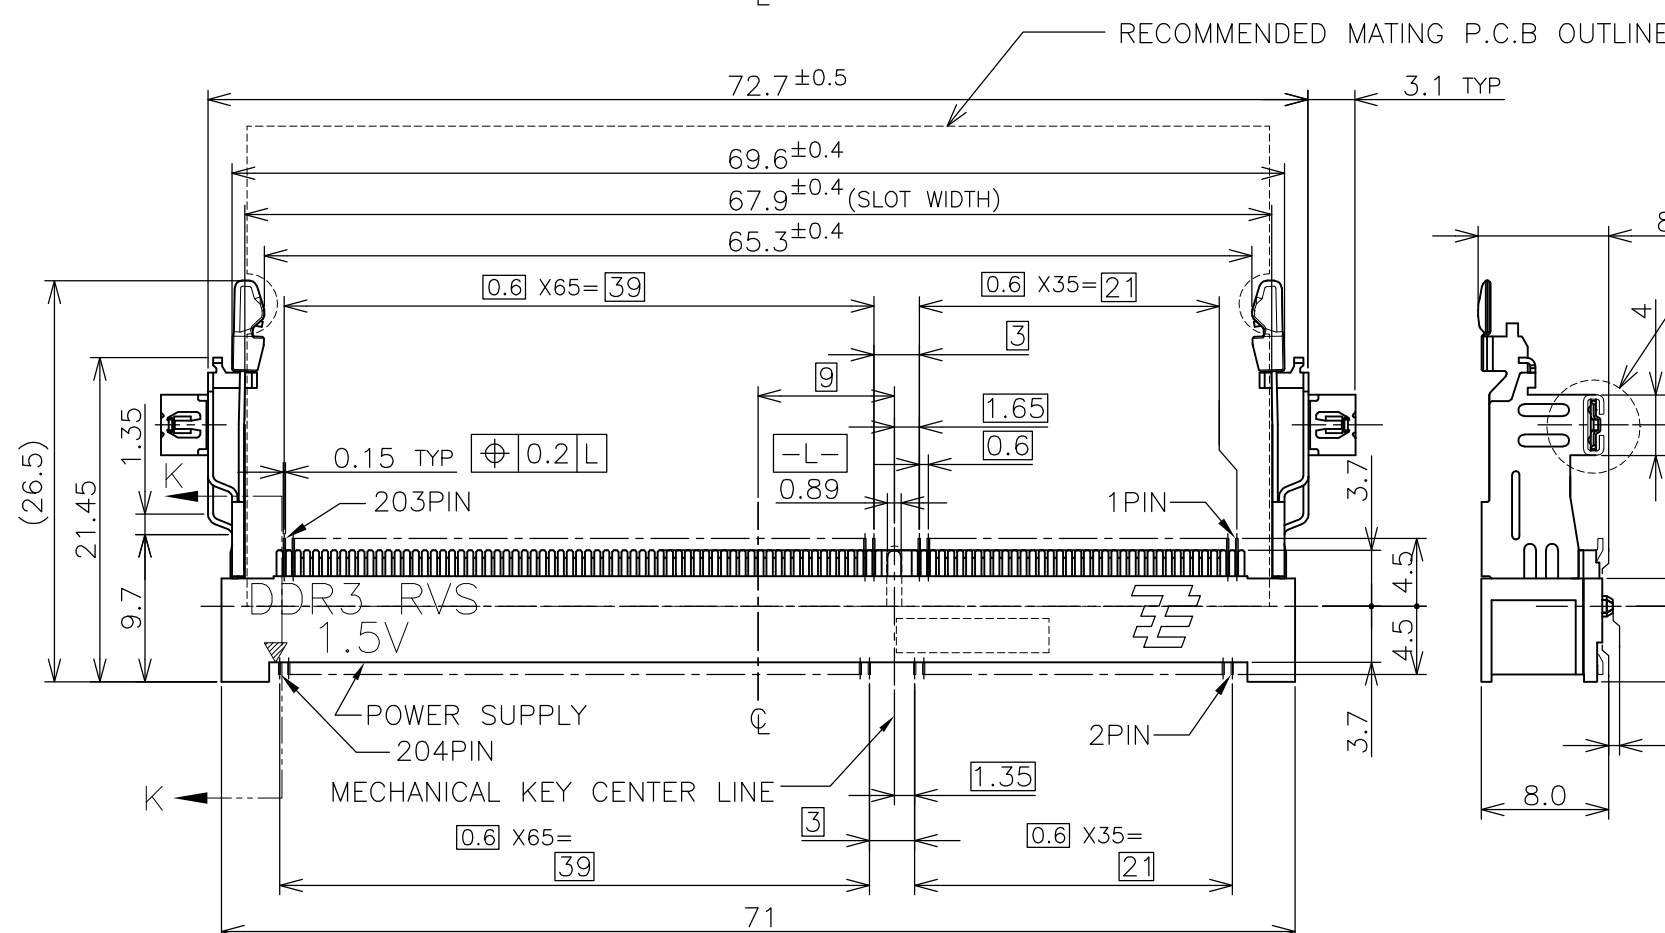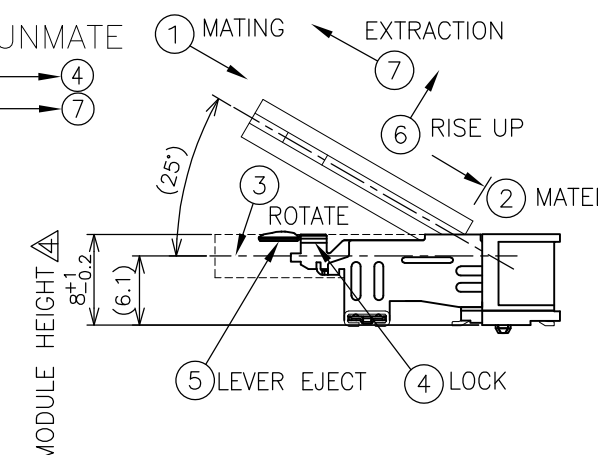MATE: ① → ④
UNMATE: ⑤ → ⑦8.23^{+0.6}_{-0.3}

SEE DETAIL J

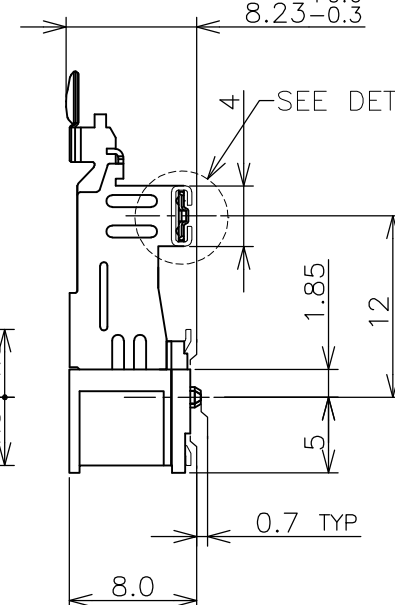

(APPLIED TO SHEET 1-2)

1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
COLOR: SEE TABLE

CONTACT: COPPER ARROY

LOCK LEVER: STAINLESS STEEL



PEG: COPPER ARROY

2-1. FINISH ; CONTACT AREA: 0.00005MIN GOLD
ALL OVER NICKEL.SOLDERING AREA: GOLD FLASH PLATING
PEG: TIN PLATING.2-2. FINISH ; CONTACT AREA: 0.000254MIN GOLD
ALL OVER NICKEL.SOLDERING AREA: GOLD FLASH PLATING
PEG: TIN PLATING.

△ COPLANARITY: 0.1 MAX. (BEFORE SOLDERING)

△ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.

△ NOT MATING CONDITION.

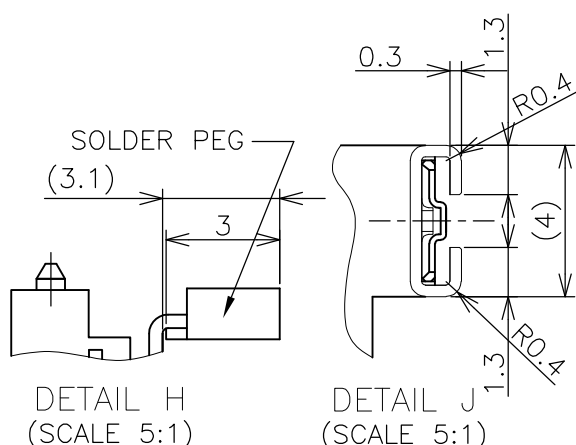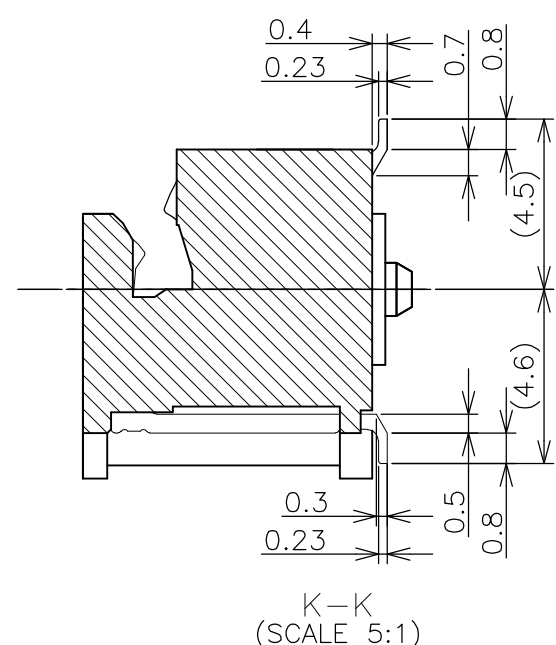6. IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY,
OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE
INSERTED AND LOCKED IN THE LATCH.GENERAL TOLERANCE
10 ≥ : ±0.2
30 ≥ > 10 : ±0.25
100 ≥ > 30 : ±0.3
ANGLES : ±3°

AVAILABLE	EMBOSS(SEE SHEET 4)	WITHBOSS	BLACK	NOTE 2-2	1.5V	204	2-1932323-2
AVAILABLE	EMBOSS(SEE SHEET 4)	WITHBOSS	BLACK	NOTE 2-1	1.5V	204	2-1932323-1
TOOLING STATUS	PACKAGING TYPE	REMARK	HOUSING COLOR	FINISH	POWER SUPPLY	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	±

MATERIAL


DWN	C.KEVIN	06AUG2009
CHK	W.COREL	10AUG2009
APVD	Y.STEVEN	10AUG2009
PRODUCT SPEC	108-78493	
APPLICATION SPEC		
WEIGHT	-	

CUSTOMER DRAWING

STE TE Connectivity

NAME			
DDR3 SODIMM SOCKET 0.6mm PITCH 204POS 8.0mm HEIGHT REVERSE TYPE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1932323	-
SCALE		SHEET	REV
2:1		1 OF 4	B

A

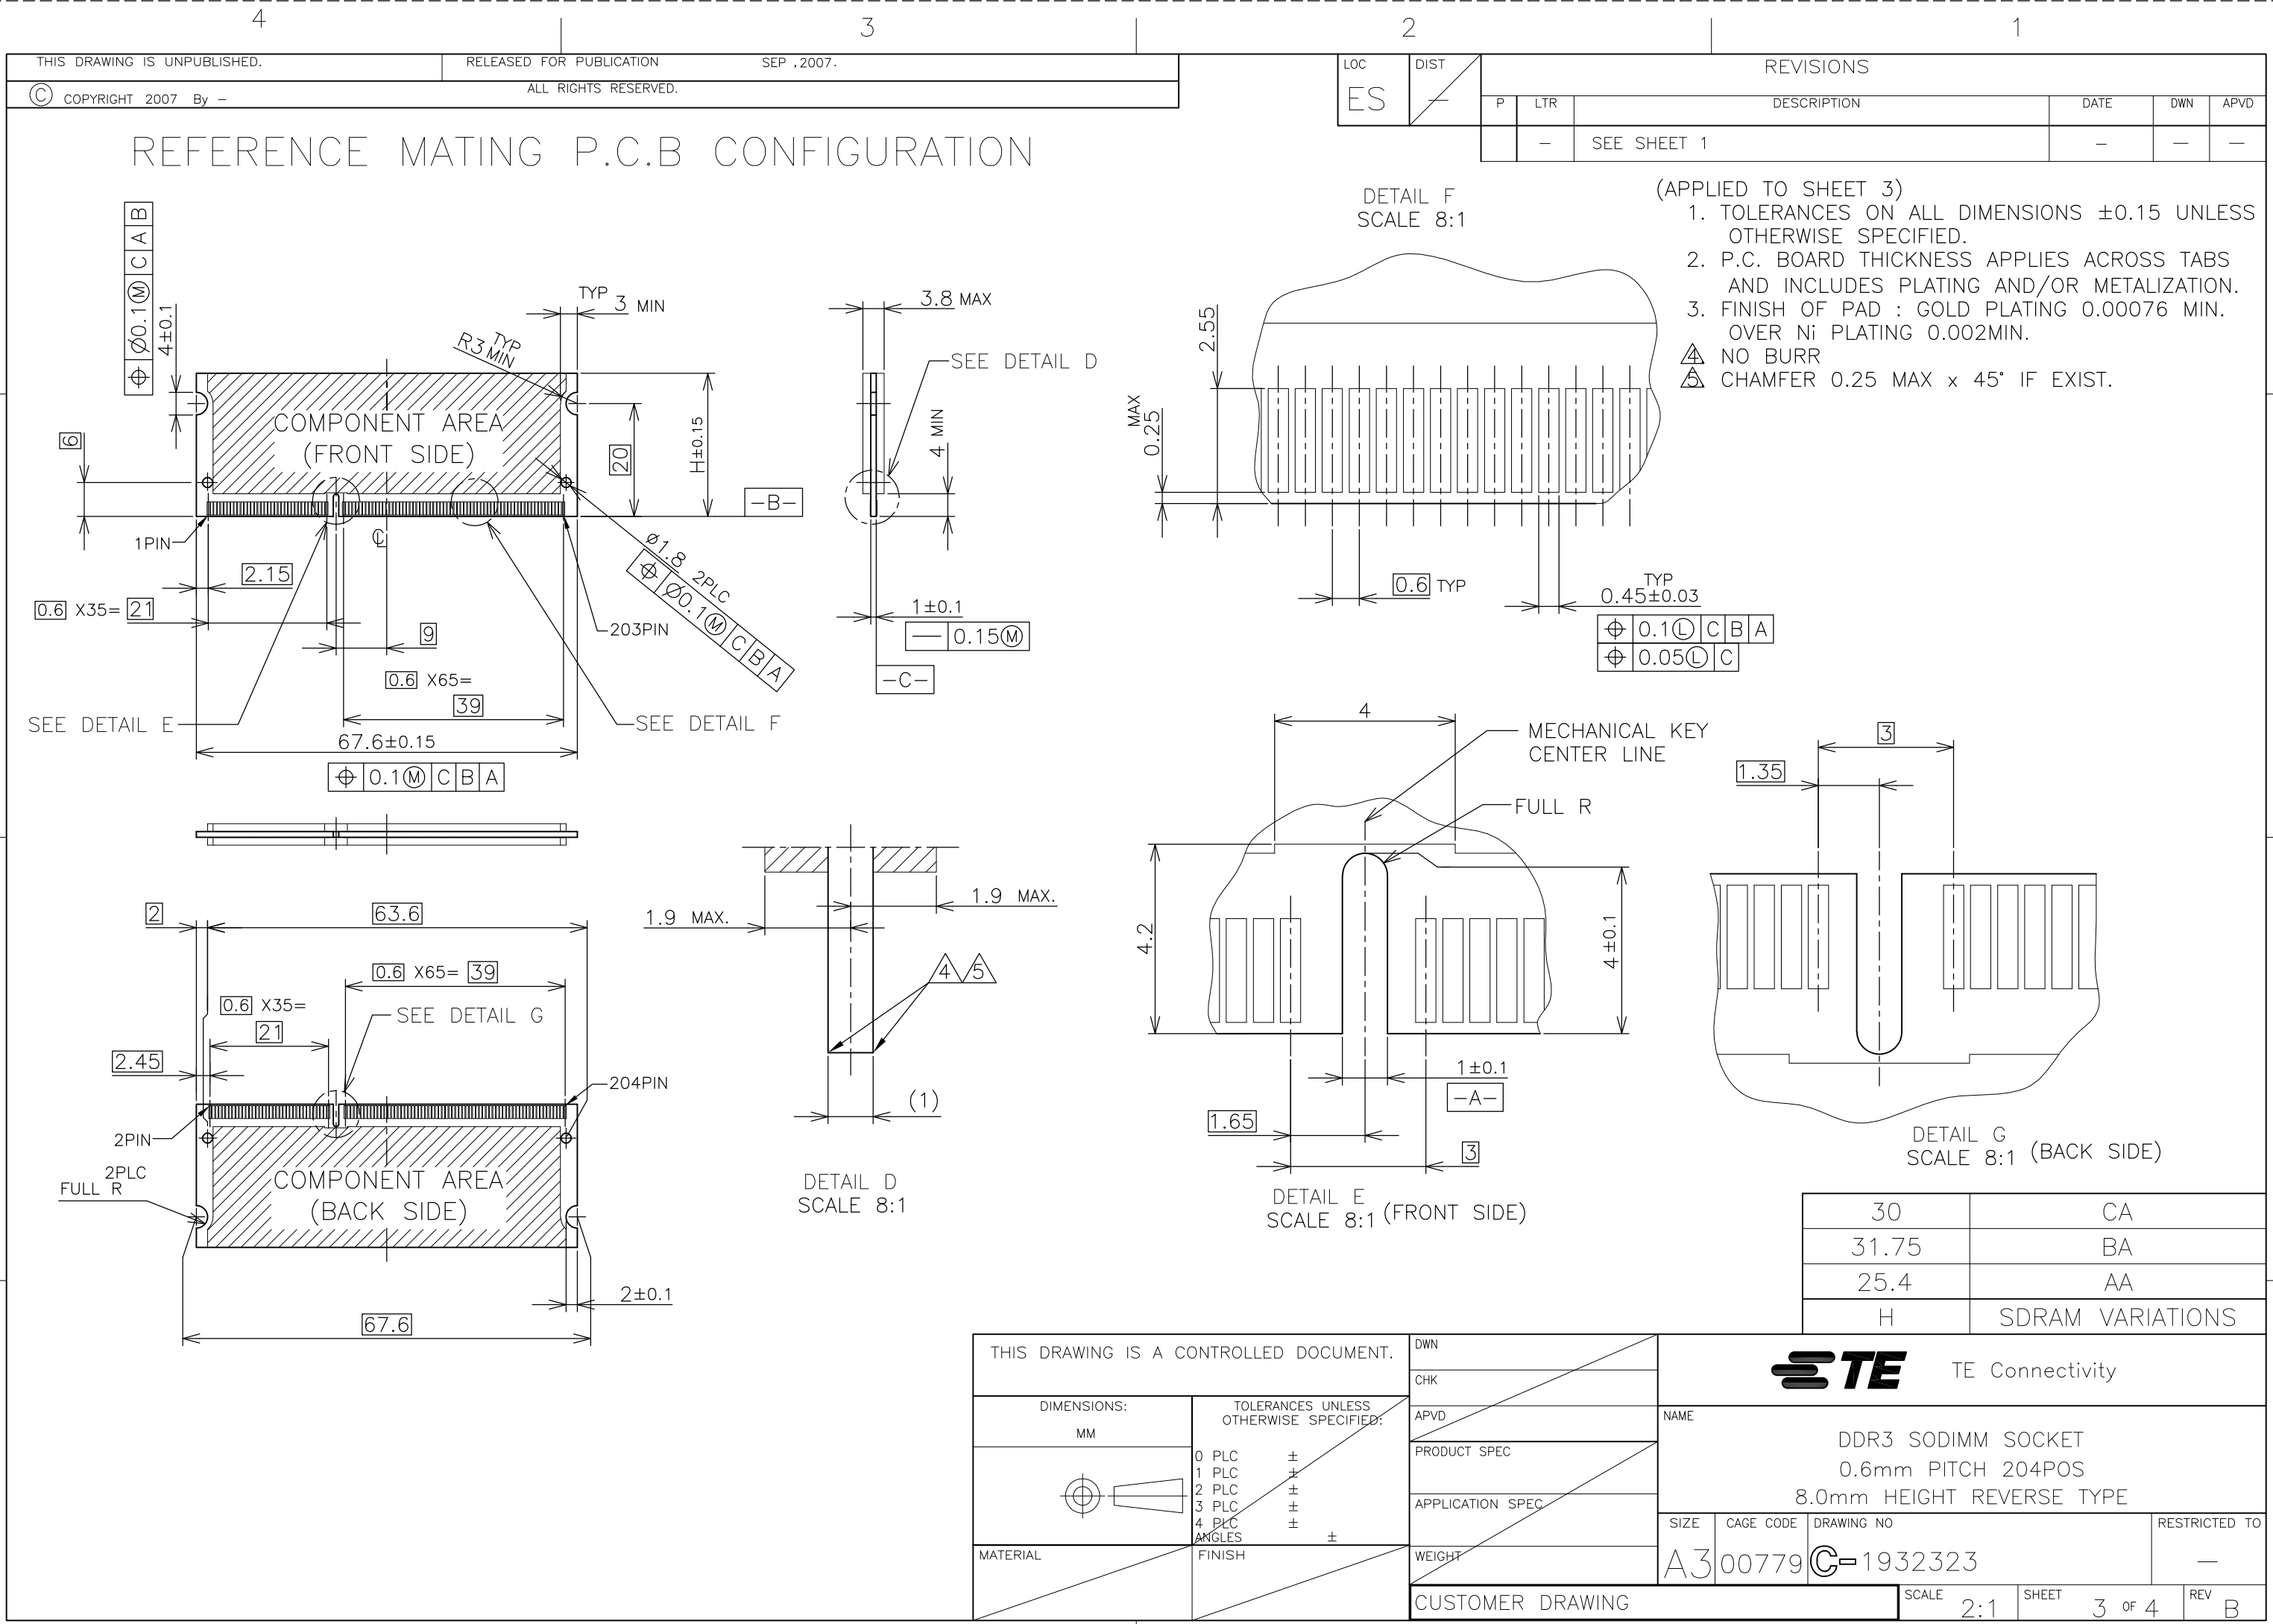

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP ,2007.

© COPYRIGHT 2007 By --

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR



DESCRIPTION

DATE

DWN




APVD

SEE SHEET 1

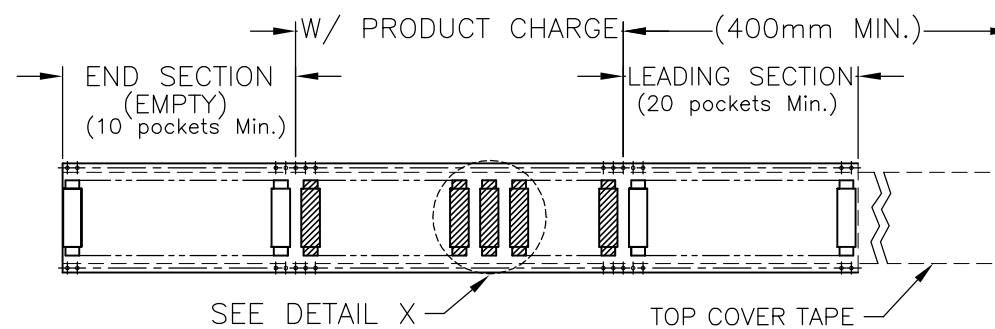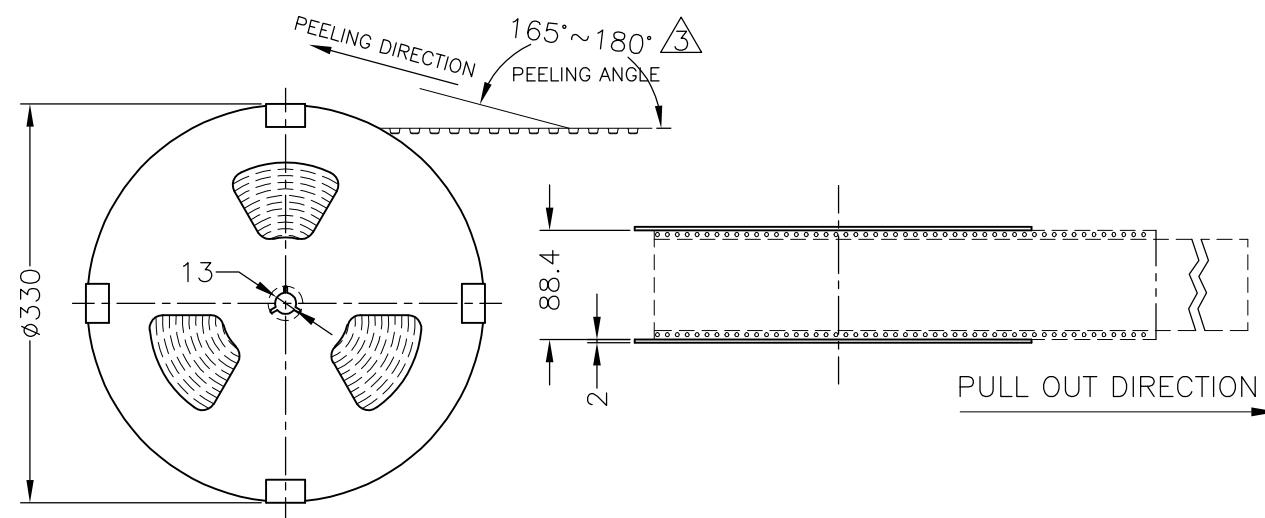


(APPLIED TO SHEET 4)

1. THE DIRECTION OF EACH CONNECTOR ON A EMBOSS IS REFERRED TO THIS DRAWING.
2. GENERAL TOLERANCE: ± 0.5 , $\pm 3^\circ$
3. THE MATERIAL OF REEL PALLET: PLASTIC/PAPER.

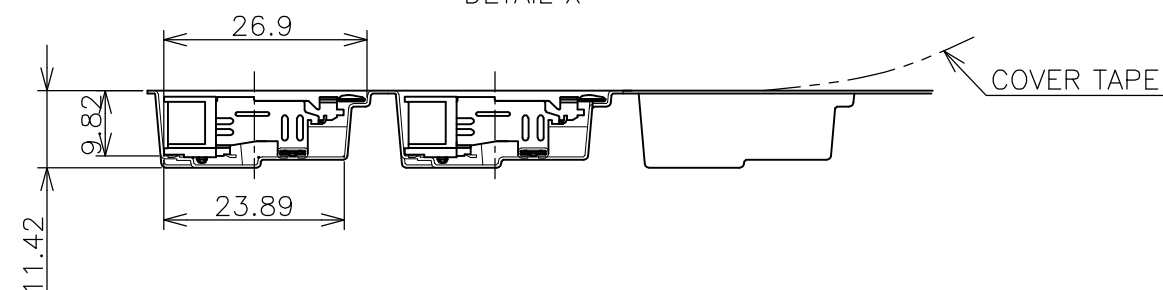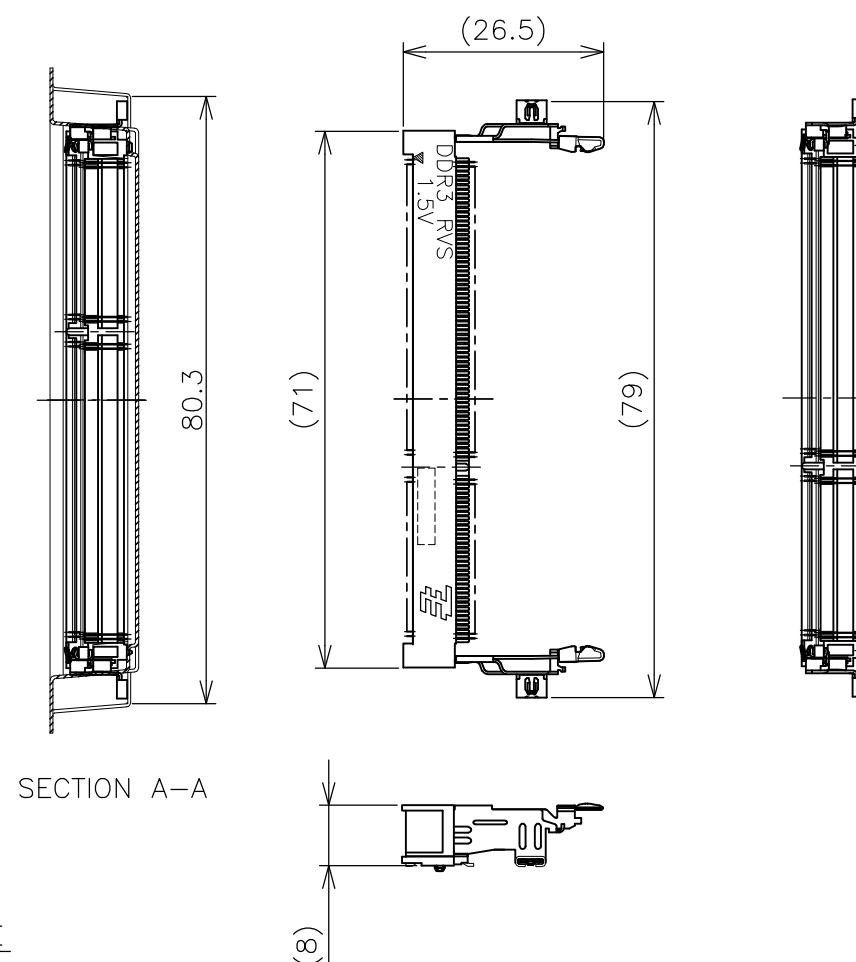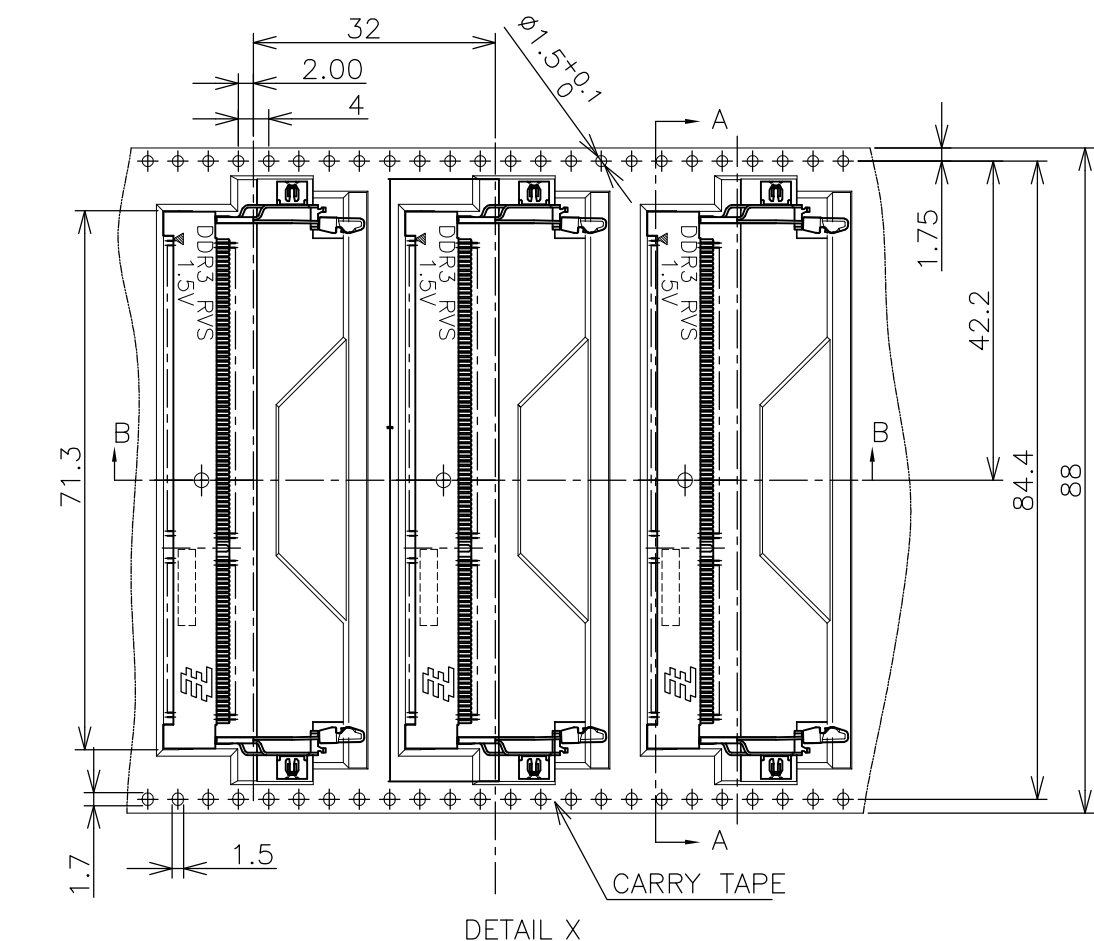

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± 0.5
1 PLC	± 0.5
2 PLC	± 0.5
3 PLC	± 0.5
4 PLC	± 0.5
ANGLES	$\pm 3^\circ$
FINISH	

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

STE

TE Connectivity

DDR3 SODIMM SOCKET
0.6mm PITCH 204POS
8.0mm HEIGHT REVERSE TYPE

A300779

C-1932323

SCALE 1:2

SHEET 4 OF 4

REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1932323-2](#)