

CMPD4150

**SURFACE MOUNT
HIGH CURRENT, HIGH SPEED
SILICON SWITCHING DIODE**



SOT-23 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPD4150 type is an ultra-high speed silicon switching diode manufactured by the epitaxial planar process, in an epoxy molded surface mount package, designed for high speed switching applications.

MARKING CODE: ABA

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Continuous Reverse Voltage
Peak Repetitive Reverse Voltage
Continuous Forward Current
Peak Repetitive Forward Current
Peak Forward Surge Current, $t_p=1.0\mu\text{s}$
Peak Forward Surge Current, $t_p=1.0\text{s}$
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL

V_R 50
 V_{RRM} 50
 I_F 250
 I_{FRM} 250
 I_{FSM} 4.0
 I_{FSM} 1.0
 P_D 350
 T_J, T_{stg} -65 to +150
 θ_{JA} 357

UNITS

V
V
mA
mA
A
A
mW
 $^\circ\text{C}$
 $^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)



SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	$V_R=50\text{V}$		100	nA
V_F	$I_F=1.0\text{mA}$	0.54	0.62	V
V_F	$I_F=10\text{mA}$	0.66	0.74	V
V_F	$I_F=50\text{mA}$	0.76	0.86	V
V_F	$I_F=100\text{mA}$	0.82	0.92	V
V_F	$I_F=200\text{mA}$	0.87	1.0	V
C_T	$V_R=0, f=1.0\text{MHz}$		4.0	pF
t_{rr}	$I_R=I_F=10\text{mA}, R_L=100\Omega, \text{Rec. to } 1.0\text{mA}$		4.0	ns

R6 (25-January 2010)

CMPD4150
SURFACE MOUNT
HIGH CURRENT, HIGH SPEED
SILICON SWITCHING DIODE



SOT-23 CASE - MECHANICAL OUTLINE

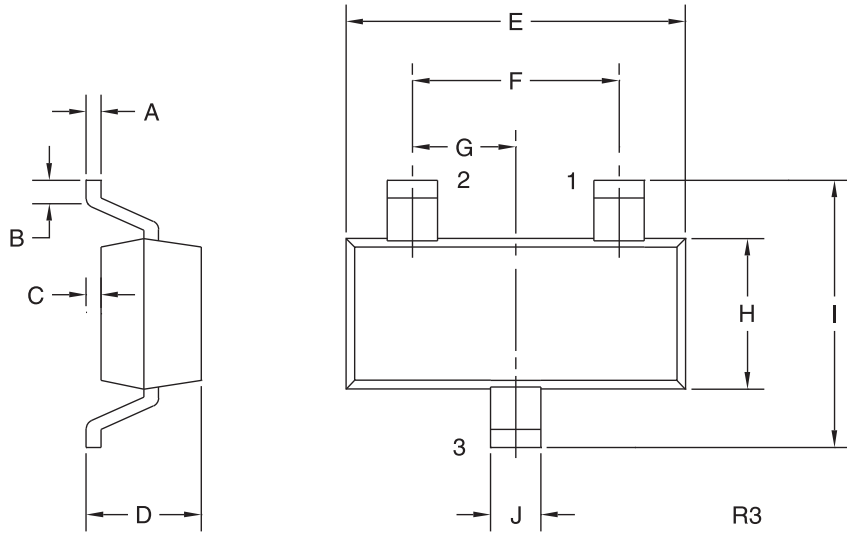

LEAD CODE:
 1) Anode
 2) No Connection
 3) Cathode

MARKING CODE: ABA

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.043	0.89	1.09
E	0.110	0.120	2.80	3.05
F	0.075		1.90	
G	0.037		0.95	
H	0.047	0.055	1.19	1.40
I	0.083	0.098	2.10	2.49
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R3)

R6 (25-January 2010)