

IB IL 230 PWR IN-PAC


Order No.: 2861535



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2861535>

Inline power terminal block, complete with accessories (connector and labeling field), without fuse, 230 V AC



Commercial data	
GTIN (EAN)	
sales group	K417
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 173 (AX-2011)

Product notes

WEEE/RoHS-compliant since:
11/20/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Interfaces	
Connection method	8-pos. Inline power connector
Interface	Supply voltage
Power supply	
I/O voltage	230 V AC

Peripherals voltage range	207 V AC ... 253 V AC (including all tolerances, including ripple)
Max. current consumption	8 A

General data

Type of protection	Surge protection
Weight	80 g
Width	36.6 mm
Height	119.8 mm
Depth	71.5 mm

Inline potential routing

Main circuit supply U_M	230 V AC (nominal value)
Power supply at U_M	8 A (nominal value)

Certificates / Approvals



Certification GOST

Accessories

Item	Designation	Description
------	-------------	-------------

Marking


0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm

Plug/Adapter


2740180	IB IL AC-PWR-IN-PLSET	Connector set, for Inline input terminal blocks with AC voltage
---------	-----------------------	---

Diagrams/Drawings

Connection diagram

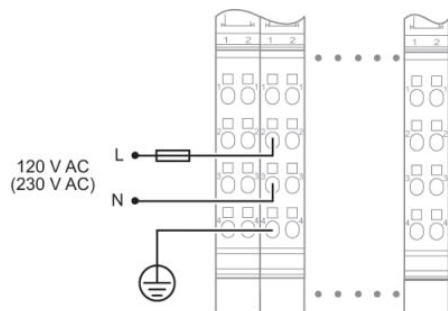

Dimensioned drawing

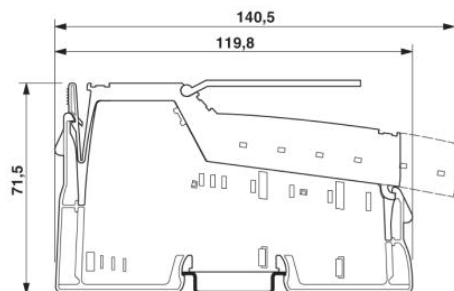

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;