

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [22-28-0123](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: KK® 254 Breakaway Header, Vertical, with Friction Lock, 12 Circuits, Tin (Sn) Plating. with Kinked PC Tails

Documents:
[3D Model](#) [Product Specification PS-10-07 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Headers
Series [42227](#)
Application Signal, Wire-to-Board
Application Tooling Part Link 11-20-1230
Overview [KK® Interconnect System - Molex](#)
Product Name KK® 254
UPC 800753791961

Physical

Breakaway Yes
Circuits (Loaded) 12
Circuits (maximum) 12
Color - Resin Black
Durability (mating cycles max) 25
Flammability 94V-0
Glow-Wire Compliant No
Lock to Mating Part Yes
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 1.565/g
Number of Rows 1
Orientation Vertical
PC Tail Length 3.05mm
PCB Locator No
PCB Retention Yes
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 2.54mm
Plating min - Mating 2.540µm
Plating min - Termination 2.540µm
Polarized to Mating Part No
Polarized to PCB No
Shrouded No
Stackable No
Temperature Range - Operating See Product Specification
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 4.0A

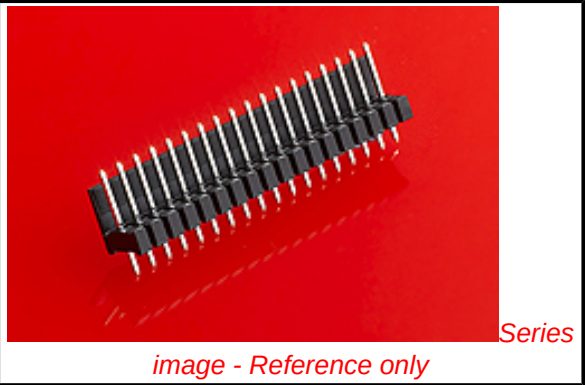


image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Low-Halogen Status
Not Low-Halogen



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[42227Series](#)

Mates With
KK® Crimp Housing 2695 , [6471](#) , [7880](#) ,
KK® PC Board Connector [4455](#)

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235
Material Info	
Old Part Number	42227-0117
Reference - Drawing Numbers	
Product Specification	PS-10-07
Sales Drawing	SD-42227-001

This document was generated on 04/23/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[22-28-0123](#)