

Modular power terminal - IB IL EX-IS PWR IN-PAC - 2869910

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline power terminal for power supply to intrinsically safe I/O terminals

Why buy this product

- ✓ Diagnostic LEDs (standard load, high load, overload) provide direct feedback regarding the capacity
- ✓ Electronic overload protection
- ✓ 1000 mA for logic supply circuit (UL)
- ✓ 1000 mA for I/O supply (UEX)
- ✓ The design requires a gap of 50 mm between intrinsically safe and non-intrinsically safe connections
- ✓ Electrical isolation between Inline I/O station and intrinsically safe I/O termination devices



Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	350.000 g
Custom tariff number	85389099
Country of origin	United States

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	48.8 mm
Height	119.9 mm
Depth	70.4 mm

Ambient conditions

Modular power terminal - IB IL EX-IS PWR IN-PAC - 2869910

Technical data

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Degree of protection	IP20

General

Mounting type	DIN rail
Net weight	292 g

Interfaces

Designation	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kbps

Inline potentials

Supply voltage	24 V DC (via Inline connector)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current consumption	max. 2 A
	max. 1.5 A
Designation	Communications power U_L
Supply voltage	5 V DC (via voltage jumper)
Power supply unit	1 A (max.)
Supply voltage	28 V DC ± 5 %
Power supply unit	max. 1 A
Power consumption	max. 8 W

Standards and Regulations

ATEX	# II 3G Ex nA IIC T4 Gc Sira 10ATEX2130X
IECEX	Ex nA IIC T4 Gc IECEX SIR 10.0085X
UL, USA/Canada	Class I, Div. 2, Groups A, B, C, D, T4
Protection class	III, VDE 0106, IEC 60536


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Modular power terminal - IB IL EX-IS PWR IN-PAC - 2869910

Connection diagram



Dimensional drawing

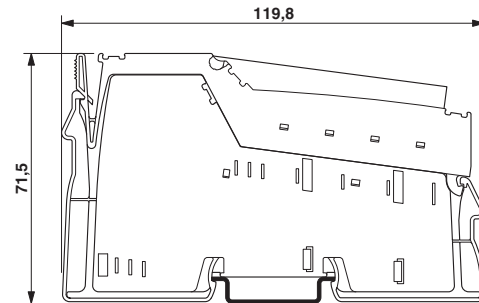

Classifications

eCl@ss

eCl@ss 4.0	27240490
eCl@ss 4.1	27240490
eCl@ss 5.0	27242208
eCl@ss 5.1	27242610
eCl@ss 6.0	27242610
eCl@ss 7.0	27242610
eCl@ss 8.0	27242610
eCl@ss 9.0	27242610

ETIM

ETIM 3.0	EC001600
ETIM 4.0	EC001600
ETIM 5.0	EC001600
ETIM 6.0	EC001600

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	32151602