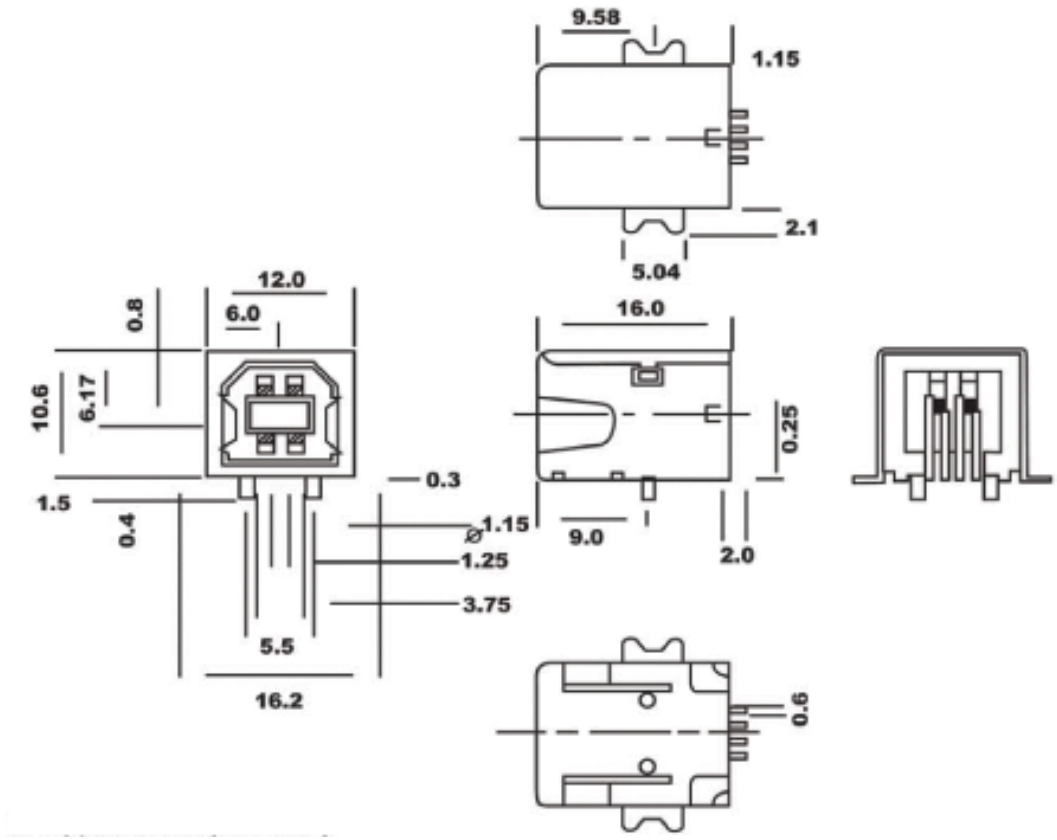

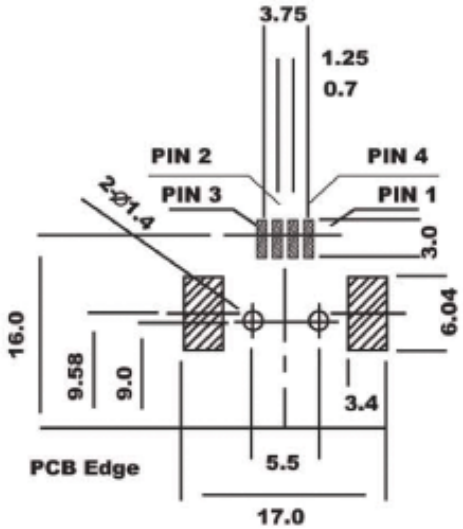

(Component Side)
PCB Layout

NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC(PBT+GF)
COLOR:BLACK/WHITE/BROWN/BEIGE----
CONTACT: BRASS
SHELL:BRASS
PLATING:
CONTACT: COLD PLATING 5µ"
SHELL: NICKEL PLATING
SPECIFICATION:
VOLTAGE RATING: 30V
CURRENT RATING: 1A
CONTACT RESISTANCE TERMINAL:30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE:750V AC
INSULATION RESISTANCE:1000MΩ MIN

RoHS Complaint

Scale	1:1						Name	Item No. A-USB-B/SMT-R (Type B, Version 1.1 5µ" Gold)
TOLERANCE								
X.X	±0.40				Drawn	01.04.11	Chappell	
X.XX	±0.25				Approved	01.04.11	Waldmann	Title: USB, Type B, Angled, SMD, White Insulator
X.XXX	±0.15							
Angle	±3°							Drawing No. rev00
			Modification	Date	Name			Replace / Sheet

ASSMANN WSW components