


2-1825143-5 Product Details

Share | Print | Email

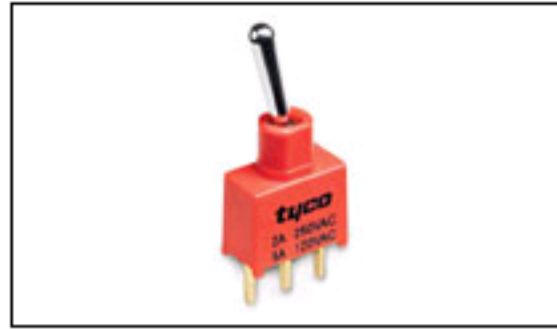

2-1825143-5

TE Internal Number: 2-1825143-5

Active

Toggle Switches

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- AE Series
- Double Pole - Double Throw Configuration (Pole-Throw)
- Current Rating = 0.4 VA A
- Mount Style = Through-Hole
- Termination Type = Wire Wrap

[View all Features](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information	
<p>Product Drawings:</p> <ul style="list-style-type: none"> • GEMINI AE SERIES TOGGLE SWITCH, DOUBLE POLE (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • SWITCHES CORE PROGRAM CATALOG (PDF, English) • GEMINI SERIES SWITCHES QUICK REF GUIDE 2-1773458-5 (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Additional Product Images:</p> <ul style="list-style-type: none"> • Product Photo • Dimensional Drawing <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)	
<p>Product Type Features:</p> <ul style="list-style-type: none"> • Series = AE • Configuration (Pole-Throw) = Double Pole - Double Throw • Termination Type = Wire Wrap <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Current Rating (A) = 0.4 VA <p>Termination Features:</p> <ul style="list-style-type: none"> • Seal Type = Terminal Seal (epoxy) <p>Body Features:</p> <ul style="list-style-type: none"> • Mount Style = Through-Hole <p>Contact Features:</p> <ul style="list-style-type: none"> • Contact Plating = Gold <p>Housing Features:</p> <ul style="list-style-type: none"> • Toggle Style = Baton Long • Toggle Length (mm [in]) = 12.70 [0.500] • Process Sealed = Yes • Bushing Style = Unthreaded • Bushing Type = Plain • UL Flammability Rating = UL 94V-0 	<p>Configuration Features:</p> <ul style="list-style-type: none"> • Operating Function = On (On) <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C • RoHS/ELV Compliance History = Always was RoHS compliant • UL Rating = Contact Only <p>Other:</p> <ul style="list-style-type: none"> • Brand = Alcoswitch • Comment = Process seal meets MIL-STD-202, Method 112 test cond. A & D at 85°C.

Corporate Information

[Who We Are](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)

Quick Links

[Check Distributor Inventory](#)
[Cross Reference](#)
[Find Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Search Knowledge Base](#)
[Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

