MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-3RN2153

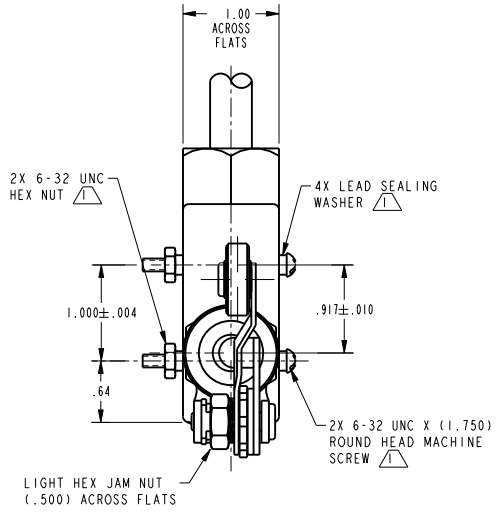

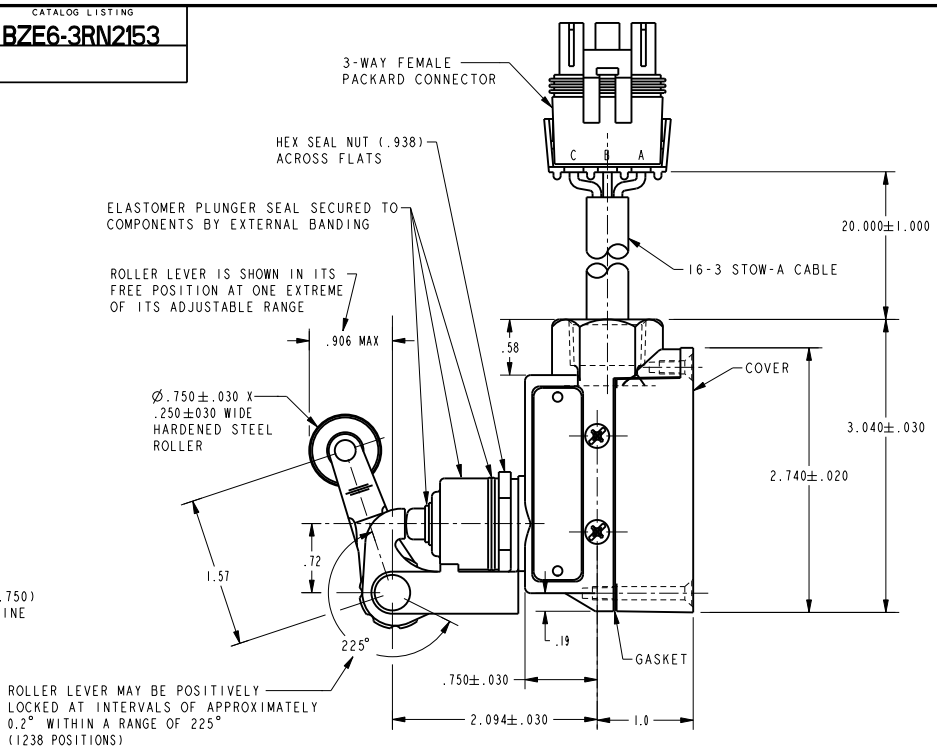

NOTES
1. FURNISHED UNASSEMBLED
2. ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
3. SWITCH CAVITY FULLY POTTED
4. BASIC SWITCH HAS .036 NOMINAL AIR GAP WITH FASALOY #5 CONTACTS

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE	20-40 OZ
DIFFERENTIAL FORCE	
RELEASE FORCE	10 OZ MIN
PRETRAVEL	.188 MAX
DIFFERENTIAL TRAVEL	.009 MAX
OVERTRAVEL	.219 MIN
FREE POSITION	

CONTACT ARRANGEMENT
S P D T

10A 125, 250 OR 480 VAC
1/2A 125 VDC, 1/4A 250 VDC

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		± 3°

WEIGHT

ANSI Y14.5M-1982 APPLIES

WIRING CONNECTIONS
A - COMMON
B - NORMALLY OPEN
C - NORMALLY CLOSED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING BZE6-3RN2153 | PAGE 1 OF 1 | RELEASE NO. 203452 | REPLACES
ISSUE 2
REVISIONS
A 0033014 BS 29AUG07
DRAWN TSM 29JUN01 | CHECK SAV 29JUN01 | CHECK PSR 29AUG07 | CHECK
PTC/CAD 2D

Downloaded from Elcodis.com electronic components distributor