


# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASEMP



Life Size   
3.2 x 2.5 x 0.85 mm

ASEMP

Moisture Sensitivity Level – MSL 1



RoHS/RoHS II compliant

Low Jitter  
High Performance  
3G MEMS Technology!

## FEATURES:

- Ultra Miniature Pure Silicon™ Clock Oscillator
- High Performance MEMS Technology by Discera
- Low Power Consumption for high speed communication
- Exceptional Stability Over Temp. at -40 to +85°C, ±15ppm
- Extended Automotive Grade Temp. stability at -55 to +125°C, ±25ppm
- MIL-STD-883 shock and vibration compliant
- Durable QFN Plastic Compact Packaging
- Standby or Disable Tri-state function
- Low jitter (Period jitter RMS and Phase jitter RMS)
- High power supply noise reduction, -50dBc

## APPLICATIONS:

- Storage Area Networks (SATA, SAS, Fiber Channel)
- Passive Optical Networks (EPON, 10G-EPON, GPON, 10G-PON)
- Ethernet (1G, 10GBASE-T/KR/LR/SR, FCoE)
- PCI Express
- Display port

## STANDARD SPECIFICATIONS:

### Common Key Electrical Specifications – CMOS, LVPECL, LVDS, and HCSL

Parameters	Minimum	Typical	Maximum	Units	Notes	
Frequency Range	CMOS	2.3000*		170.0000	MHz	Commercial, Industrial temp. range
	CMOS	2.3000*		100.0000		Automotive temp. range -55 ~ +125°C
	LVPECL	2.3000*		460.0000		Commercial, Industrial temp. range
	LVDS	2.3000*		460.0000		Commercial, Industrial temp. range
	HCSL	2.3000*		460.0000		Commercial, Industrial temp. range
Operating Temperature	-20		+70	°C	See options	
Storage Temperature	-55		+150	°C		
Overall Frequency Stability	-50		+50	ppm	See options	
Supply Voltage (Vdd)	+2.25		+3.6	V		
Startup Time			5	ms		
Enable Time			20	ns	STD (Tri-state)	
			5	ms	PD option (Power Down)	
Disable Time			5	ns		
Disable Current		20	22	mA	STD (Tri-state)	
			0.095		PD option (Power Down)	
Tri-state Function (Standby/Disable)	"1" (VIH≥0.75*Vdd) or Open: Oscillation "0" (VIL<0.25*Vdd) : Hi Z			V	40kΩ pull-up resistor embedded	
Aging	-5.0		+5.0	ppm	First year	

\* For 2.3000MHz ≤ F0 ≤ 9.9999MHz, 6-8 weeks lead-time applies

### Key Electrical Specifications – CMOS

Parameters	Minimum	Typical	Maximum	Units	Notes
Supply Current (I <sub>dd</sub> )		31	35	mA	CL=15pF, 125MHz
Output Logic Level	V <sub>OH</sub>	0.9*V <sub>dd</sub>		V	I=±6mA
	V <sub>OL</sub>		0.1*V <sub>dd</sub>	V	
Rise Time		1.1	2.0	ns	CL=15pF
Fall Time		1.3	2.0	ns	20% to 80%
Duty Cycle	45		55	%	
Integrated Phase Jitter (J <sub>PH</sub> )		0.30	2	ps	200kHz ~ 20MHz@125MHz
		0.38	2		100kHz ~ 20MHz@125MHz
		1.70	2		12kHz ~ 20MHz@125MHz
Period Jitter RMS (J <sub>PER</sub> )		3.0		ps	

ABRACON IS  
ISO9001:2008  
CERTIFIED




2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASEMP



Life Size   
3.2 x 2.5 x 0.85 mm

ASEMP



RoHS/RoHS II compliant

## Key Electrical Specifications – LVPECL

Parameters		Minimum	Typical	Maximum	Units	Notes
Supply Current ( $I_{dd}$ )			56.5	58	mA	RL=50Ω
Output Logic Level	$V_{OH}$	$V_{dd}-1.08$			V	RL=50Ω
	$V_{OL}$			$V_{dd}-1.55$	V	
Peak to Peak Output Swing ( $V_{pp}$ )			800		mV	Single ended
Rise Time	$T_r$		250		ps	RL=50Ω , CL=0pF 20% to 80%
Fall Time	$T_f$		250			
Duty Cycle		48		52	%	Differential
Integrated Phase Jitter ( $J_{PH}$ )			0.25	2	ps	200kHz ~ 20MHz @156.25MHz
			0.38	2		100kHz ~ 20MHz @156.25MHz
			1.70	2		12kHz ~ 20MHz @156.25MHz
Period Jitter RMS ( $J_{PER}$ )			2.5		ps	

## Key Electrical Specifications – LVDS

Parameters		Minimum	Typical	Maximum	Units	Notes
Supply Current ( $I_{dd}$ )			29	32	mA	RL=100Ω
Output Offset Voltage ( $V_{OS}$ )		1.125		1.4	V	RL=100Ω differential
Delta Offset Voltage ( $\Delta V_{OS}$ )				50	mV	
Peak to Peak Output Swing ( $V_{pp}$ )			350		mV	Single ended
Rise Time	$T_r$		200		ps	RL=50Ω , CL=2pF 20% to 80%
Fall Time	$T_f$		200			
Duty Cycle		48		52	%	Differential
Integrated Phase Jitter ( $J_{PH}$ )			0.28	2	ps	200kHz ~ 20MHz @156.25MHz
			0.40	2		100kHz ~ 20MHz @156.25MHz
			1.70	2		12kHz ~ 20MHz @156.25MHz
Period Jitter RMS ( $J_{PER}$ )			2.5		ps	

## Key Electrical Specifications – HCSL

Parameters		Minimum	Typical	Maximum	Units	Notes
Supply Current ( $I_{dd}$ )			40	42	mA	RL=50Ω
Output Logic Level	$V_{OH}$	0.725			V	RL=50Ω
	$V_{OL}$			0.1	V	
Peak to Peak Output Swing ( $V_{pp}$ )			750		mV	Single ended
Rise Time	$T_r$	200		400	ps	RL=50Ω , CL=2pF 20% to 80%
Fall Time	$T_f$	200		400		
Duty Cycle		48		52	%	Differential
Integrated Phase Jitter ( $J_{PH}$ )			0.25	2	ps	200kHz ~ 20MHz @156.25MHz
			0.37	2		100kHz ~ 20MHz @156.25MHz
			1.70	2		12kHz ~ 20MHz @156.25MHz
Period Jitter RMS ( $J_{PER}$ )			2.5		ps	

ABRACON IS  
ISO9001:2008  
CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASEMP



Life Size   
3.2 x 2.5 x 0.85 mm

ASEMP



RoHS/RoHS II compliant

## Absolute Maximum Ratings

Item	Minimum	Maximum	Unit	Condition
Supply Voltage	-0.3	+4.0	V	
Input Voltage	-0.3	V <sub>dd</sub> +0.3	V	
Junction Temp.		+150	°C	
Storage Temp.	-55	+150	°C	
Soldering Temp.		+260	°C	40sec max
ESD			V	
HBM		4,000		
MM		400		
CDM		1,500		

## OPTIONS AND PART IDENTIFICATION: (left blank if standard)

### Programmed Orders (Quantity > 1,000pcs)

ASEMP  -  MHz -   -  -

Output Type	Frequency in MHz	Operating Temp.	Overall Freq. Stability	Tri-state (Pin 1)	Packaging
C: CMOS	e.g. 156.2500 MHz (Maximum 4 digits after decimal)	Blank: -20°C ~ +70°C L: -40°C ~ +85°C X: -40°C ~ +105°C Z**: -55°C ~ +125°C	Blank: ±50ppm Y: ±10ppm* R: ±25 ppm	Blank: Tri-state PD: Power Down	Blank***: Tube (110pcs / Tube) T: Tape & Reel (1kpcs / reel) T3: Tape & Reel (3kpcs / reel) T5: Tape & Reel (5kpcs / reel)

\* Temp option L, X or -20°C ~ +70°C, only

\*\* CMOS output only

\*\*\* For Quick turn-around programmable orders < 1000pcs: Due to the immediate availability of stock and the qty of the order, the parts may be delivered as BULK: Cut Tape, Loose parts in Antistatic Bag or in Tube(s). The MOQ per the series will still apply for Tube packaging.

### Un-Programmed Orders

Blank un-programmed oscillators and our low cost portable programmer are available for quick turn engineering requirements. Please call ABRACON or visit MEMSpeed Pro II site <http://www.abracon.com/memspeedpro/MEMSpeedProFlyerII.pdf> for more information.

ASEMP  - BLANK -   -  -

Output Type	Operating Temp.	Overall Freq. Stability	Tri-state (Pin 1)	Packaging
C: CMOS LP: LVPECL LV: LVDS HC: HCSL	Blank: -20°C ~ +70°C L: -40°C ~ +85°C X: -40°C ~ +105°C Z**: -55°C ~ +125°C	Blank: ±50ppm Y: ±10ppm* R: ±25 ppm	Blank: Tri-state PD: Power Down	Blank: Tube (110pcs / Tube) T: Tape & Reel (1kpcs / reel) T3: Tape & Reel (3kpcs / reel) T5: Tape & Reel (5kpcs / reel)

\* Temp option L, X or -20°C ~ +70°C, only

\*\* CMOS output only

ABRACON IS  
ISO9001:2008  
CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASEMP



Life Size   
3.2 x 2.5 x 0.85 mm

ASEMP




RoHS/RoHS II compliant


## NOMINAL PERFORMANCE PARAMETERS

(Unless specified otherwise: T=25° C, VDD=3.3 V)

### CMOS OUTPUT

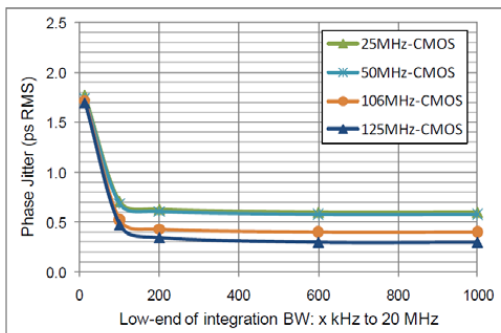


Phase jitter (integrated phase noise)

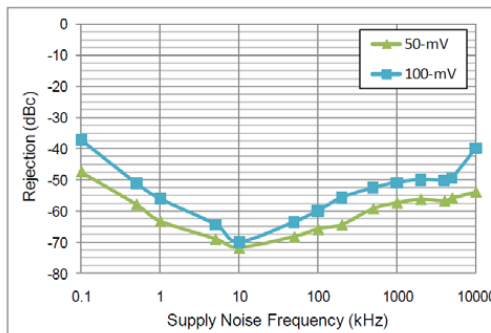


Power supply rejection ratio


### Test Circuit

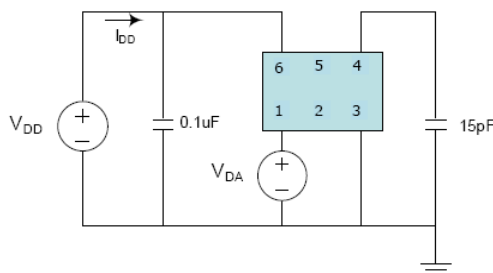

### LVPECL output

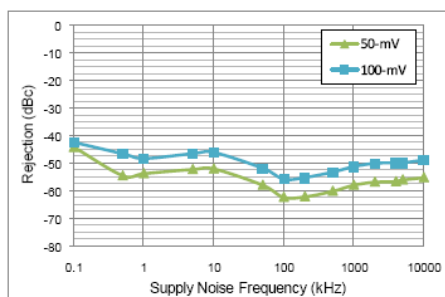


Power supply rejection ratio

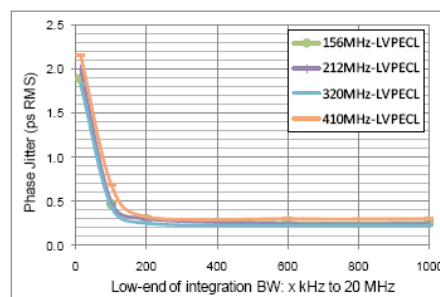

Phase jitter (integrated phase noise)

### Test Circuit

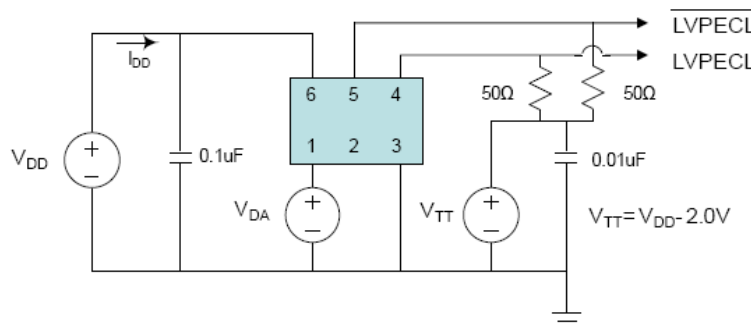

ABRACON IS  
ISO9001:2008  
CERTIFIED

**ABRACON** LLC  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASEMP





Life Size   
3.2 x 2.5 x 0.85 mm

ASEMP




RoHS/RoHS II compliant



## LVDS OUTPUT

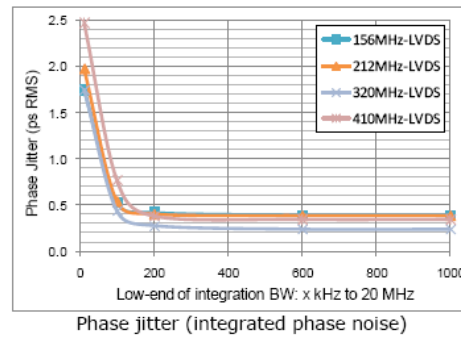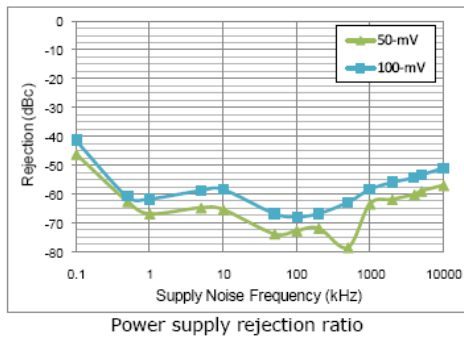


## Test Circuit

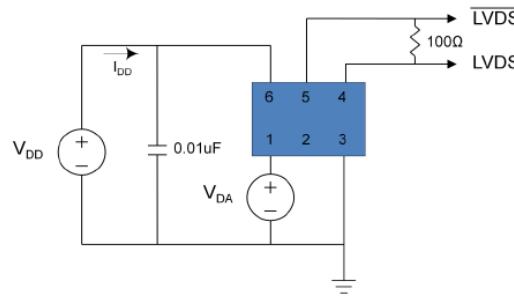

## HCSL OUTPUT

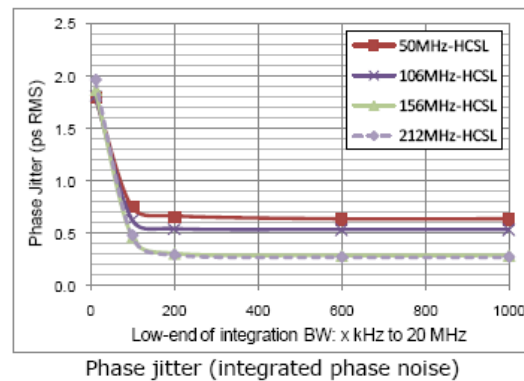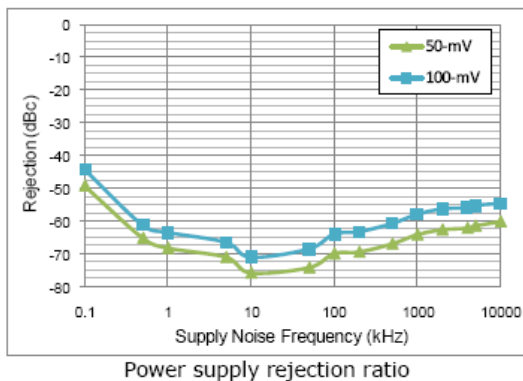

## Test Circuit

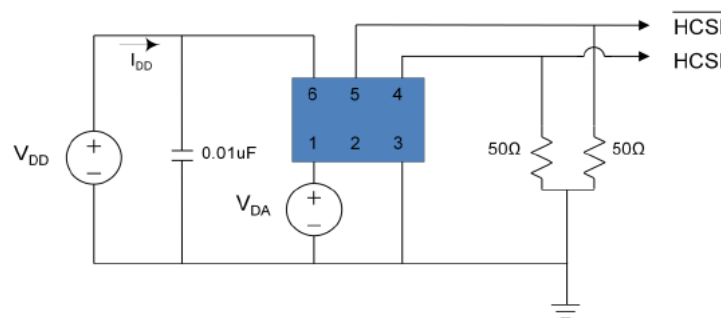

ABRACON IS  
ISO9001:2008  
CERTIFIED

**ABRACON** LLC  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASEMP






Life Size   
3.2 x 2.5 x 0.85 mm

ASEMP




RoHS/RoHS II compliant

## OUTLINE DIMENSIONS:

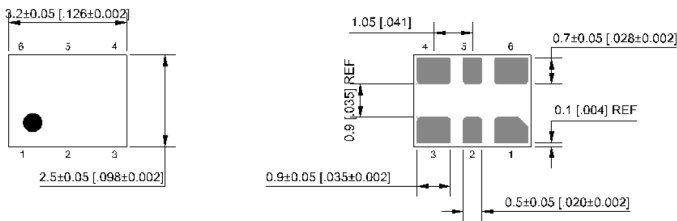

Recommended Land Pattern for LVPECL, LVDS, HCSL



Recommended Land Pattern for CMOS


Pin #	Function
1	Tri-state
2	NC
3	GND
4	Output
5	NC (CMOS) Output (LVPECL, LVDS, HCSL)
6	Vdd

Note: Recommend using an approximately 0.01µF bypass capacitor between PIN 6 and 3.


Dimensions: mm (inches)

## TAPE AND REEL:

T= 1,000pcs/reel (D=180mm)  
T3= 3,000pcs/reel (D=180mm)  
T5= 5,000pcs/reel (D=330mm)

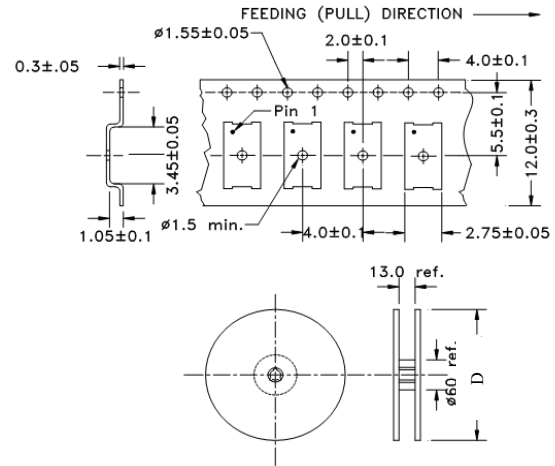

Tube: 110 pcs/tube




Unit orientation in tube:



Dimensions: mm

## REFLOW PROFILE:

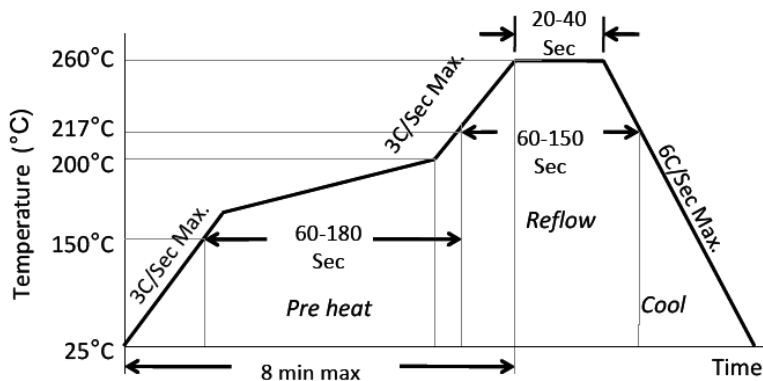

Ramp-Up Rate (200°C to Peak Temp)	3°C/Sec Max.
Preheat Time 150°C to 200°C	60-180 Sec
Time maintained above 217°C	60-150 Sec
Peak Temperature	255-260°C
Time within 5°C of actual Peak	20-40 Sec
Ramp-Down Rate	6°C/Sec Max.
Time 25°C to Peak Temperature	8 min Max.

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ABRACON:

[ASEMPC- ADAPTER-KIT](#) [ASEMPHC- ADAPTER-KIT](#) [ASEMPLP- ADAPTER-KIT](#) [ASEMPLV- ADAPTER-KIT](#)  
[ASEMPC-10.000MHZ-LR-T](#) [ASEMPC-10.000MHZ-LY-T3](#) [ASEMPC-10.000MHZ-T3](#) [ASEMPC-10.000MHZ-Z-T](#)  
[ASEMPC-100.000MHZ-LR-T](#) [ASEMPC-100.000MHZ-LY-T3](#) [ASEMPC-100.000MHZ-T3](#) [ASEMPC-100.000MHZ-Z-T](#)  
[ASEMPC-106.250MHZ-LR-T](#) [ASEMPC-106.250MHZ-LY-T3](#) [ASEMPC-106.250MHZ-T3](#) [ASEMPC-106.250MHZ-Z-T](#)  
[ASEMPC-11.0592MHZ-LR-T](#) [ASEMPC-11.0592MHZ-LY-T3](#) [ASEMPC-11.0592MHZ-T3](#) [ASEMPC-11.0592MHZ-Z-T](#)  
[ASEMPC-12.000MHZ-LR-T](#) [ASEMPC-12.000MHZ-LY-T3](#) [ASEMPC-12.000MHZ-T3](#) [ASEMPC-12.000MHZ-Z-T](#)  
[ASEMPC-12.288MHZ-LR-T](#) [ASEMPC-12.288MHZ-LY-T3](#) [ASEMPC-12.288MHZ-T3](#) [ASEMPC-12.288MHZ-Z-T](#)  
[ASEMPC-12.352MHZ-LR-T](#) [ASEMPC-12.352MHZ-T3](#) [ASEMPC-12.352MHZ-Z-T](#) [ASEMPC-12.500MHZ-LR-T](#)  
[ASEMPC-12.500MHZ-T3](#) [ASEMPC-12.500MHZ-Z-T](#) [ASEMPC-120.000MHZ-LR-T](#) [ASEMPC-120.000MHZ-T3](#)  
[ASEMPC-120.000MHZ-Z-T](#) [ASEMPC-125.000MHZ-LR-T](#) [ASEMPC-125.000MHZ-LY-T3](#) [ASEMPC-125.000MHZ-T3](#)  
[ASEMPC-125.000MHZ-Z-T](#) [ASEMPC-13.000MHZ-LR-T](#) [ASEMPC-13.000MHZ-T3](#) [ASEMPC-13.000MHZ-Z-T](#)  
[ASEMPC-133.333MHZ-LR-T](#) [ASEMPC-133.333MHZ-LY-T3](#) [ASEMPC-133.333MHZ-T3](#) [ASEMPC-133.333MHZ-Z-T](#)  
[ASEMPC-14.31818MHZ-LR-T](#) [ASEMPC-14.31818MHZ-LY-T3](#) [ASEMPC-14.31818MHZ-T3](#) [ASEMPC-14.31818MHZ-Z-](#)  
[T](#) [ASEMPC-14.7456MHZ-LR-T](#) [ASEMPC-14.7456MHZ-LY-T3](#) [ASEMPC-14.7456MHZ-T3](#) [ASEMPC-14.7456MHZ-Z-T](#)  
[ASEMPC-15.000MHZ-LR-T](#) [ASEMPC-15.000MHZ-T3](#) [ASEMPC-15.000MHZ-Z-T](#) [ASEMPC-150.000MHZ-LR-T](#)  
[ASEMPC-150.000MHZ-LY-T3](#) [ASEMPC-150.000MHZ-T3](#) [ASEMPC-150.000MHZ-Z-T](#) [ASEMPC-16.000MHZ-LR-T](#)  
[ASEMPC-16.000MHZ-LY-T3](#) [ASEMPC-16.000MHZ-T3](#) [ASEMPC-16.000MHZ-Z-T](#) [ASEMPC-16.384MHZ-LR-T](#)  
[ASEMPC-16.384MHZ-LY-T3](#) [ASEMPC-16.384MHZ-T3](#) [ASEMPC-16.384MHZ-Z-T](#) [ASEMPC-18.432MHZ-LR-T](#)  
[ASEMPC-18.432MHZ-LY-T3](#) [ASEMPC-18.432MHZ-T3](#) [ASEMPC-18.432MHZ-Z-T](#) [ASEMPC-19.440MHZ-LR-T](#)  
[ASEMPC-19.440MHZ-T3](#) [ASEMPC-19.440MHZ-Z-T](#) [ASEMPC-20.000MHZ-LR-T](#) [ASEMPC-20.000MHZ-LY-T3](#)  
[ASEMPC-20.000MHZ-T3](#) [ASEMPC-20.000MHZ-Z-T](#) [ASEMPC-24.000MHZ-LR-T](#) [ASEMPC-24.000MHZ-LY-T3](#)  
[ASEMPC-24.000MHZ-T3](#) [ASEMPC-24.000MHZ-Z-T](#) [ASEMPC-24.576MHZ-LR-T](#) [ASEMPC-24.576MHZ-LY-T3](#)  
[ASEMPC-24.576MHZ-T3](#) [ASEMPC-24.576MHZ-Z-T](#) [ASEMPC-25.000MHZ-LR-T](#) [ASEMPC-25.000MHZ-LY-T3](#)  
[ASEMPC-25.000MHZ-T3](#) [ASEMPC-25.000MHZ-Z-T](#) [ASEMPC-26.000MHZ-LR-T](#) [ASEMPC-26.000MHZ-T3](#) [ASEMPC-](#)  
[26.000MHZ-Z-T](#) [ASEMPC-27.000MHZ-LR-T](#) [ASEMPC-27.000MHZ-LY-T3](#) [ASEMPC-27.000MHZ-T3](#)