

MICRO SWITCH

FREEDPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91928

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RN28-S

BZE6-2RN28-S

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. PR-15394

29AUG07

PSR

CHECK

24AUG06

DVM

CHECK

30OCT06

BS

29AUG07

REVISIONS

A	072476	4 SEP 82	KNS
B	77179A	17 FEB 94	KNS
C	0017057	23 NOV 05	VKR
D	0023923	24AUG06	RKP
E	0025947	30OCT06	KNS
F	0033014	29AUG07	BS

RASTER


DRAWN

CHECK

87

23 FEB 87

J A S

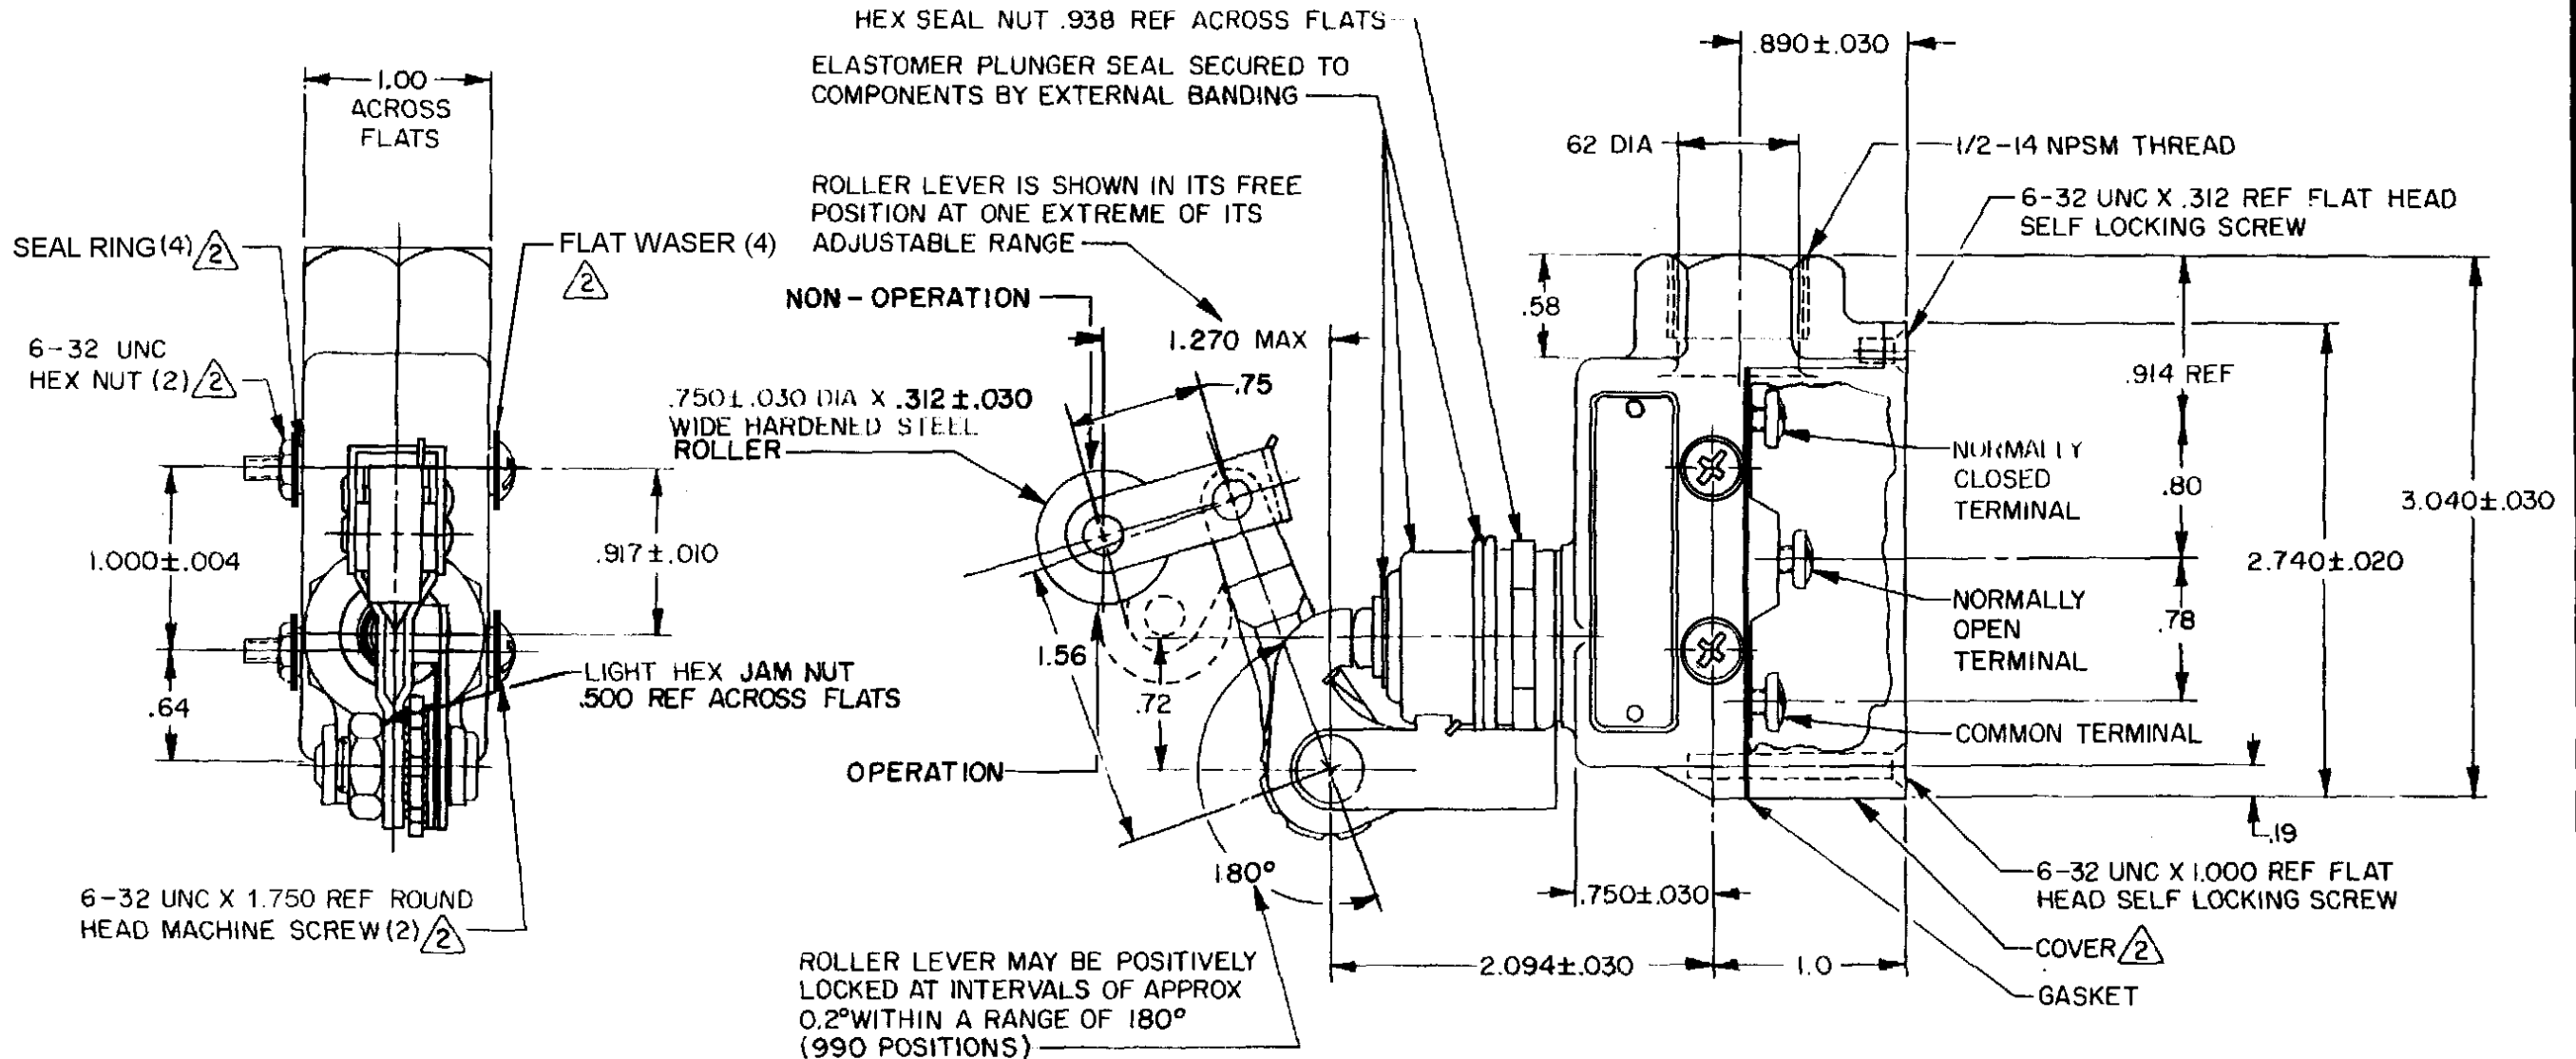

NOTES

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 4 - SEAL RATING: NEMA 1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE-----8-20 OZ	CONTACT ARRANGEMENT SPDT
RELEASE FORCE-----6 OZ MIN	L74
PRETRAVEL-----.234 MAX	15A 125, 250, OR 480VAC 2A 600 VAC
DIFFERENTIAL TRAVEL-----.006 MAX	1/8 HP 125 VAC, 1/4 HP 250 VAC
OVERTRAVEL-----.219 MIN	1/2A 125 VDC, 1/4A 250 VDC
BASIC SWITCH REPLACEMENT-----BZ-2RN702	CE 1.5A, 240 Vac

SCALE	FULL
DO NOT SCALE PRINT	
TOLERANCES	
APPLY TO DIMENSIONS UNLESS OTHERWISE SPECIFIED	
DIM. TOL. DIM. TOL.	
IN. FRACTIONS DECIMALS	IN. FRACTIONS DECIMALS
0.001 0.005 0.010 0.015 0.020 0.030 0.040 0.050 0.060 0.070 0.080 0.090 0.100 0.125 0.150 0.175 0.200 0.250 0.300 0.375 0.400 0.500 0.625 0.750 0.875 1.000 1.250 1.500 1.750 2.000 2.500 3.000 3.750 4.000 5.000 6.000 7.000 8.000 10.000	0.001 0.005 0.010 0.015 0.020 0.030 0.040 0.050 0.060 0.070 0.080 0.090 0.100 0.125 0.150 0.175 0.200 0.250 0.300 0.375 0.400 0.500 0.625 0.750 0.875 1.000 1.250 1.500 1.750 2.000 2.500 3.000 3.750 4.000 5.000 6.000 7.000 8.000 10.000
DESIGN UNITS	THIRD ANGLE PROJECTION
WEIGHT	.71 LB