


SPECIFICATIONS


Material: Boot: APM-RUBRGLAS (transparent silicone rubber) conforms to ZZ-R-765, Class III Grade 50.
Temperature Range: E-SEELS: -80°F to +400°F
Pressure Range: Dust tight and splashproof.
Resistant to: Salt spray, weather, sunlight, ozone, corona and most acids.
Shelf Life: Excess of 25 years.
Operational Life: 10,000 actuations, minimum.

Notes:

1. Mounting screws are supplied in lengths shown unless otherwise specified.
 2. New sizes and types of RUBRGLAS-SEELS ® are being added regularly. Please request other types and styles as required.
- Agency Recognition:** Front Panel mounted Circuit Breaker Boots are UL-listed to UL Std. 50, types 1, 2, 3, 12, 12K, and 13. Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL Std. 50, type 1. Also meet CSA standards.

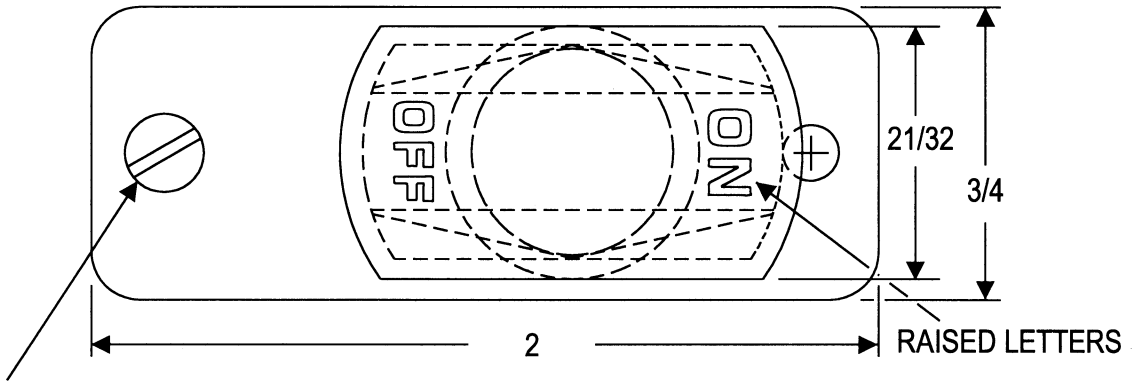

NOTE: ORDER SEPARATELY
 2 - #6-32 x 3/8 SEELSKREWS ®

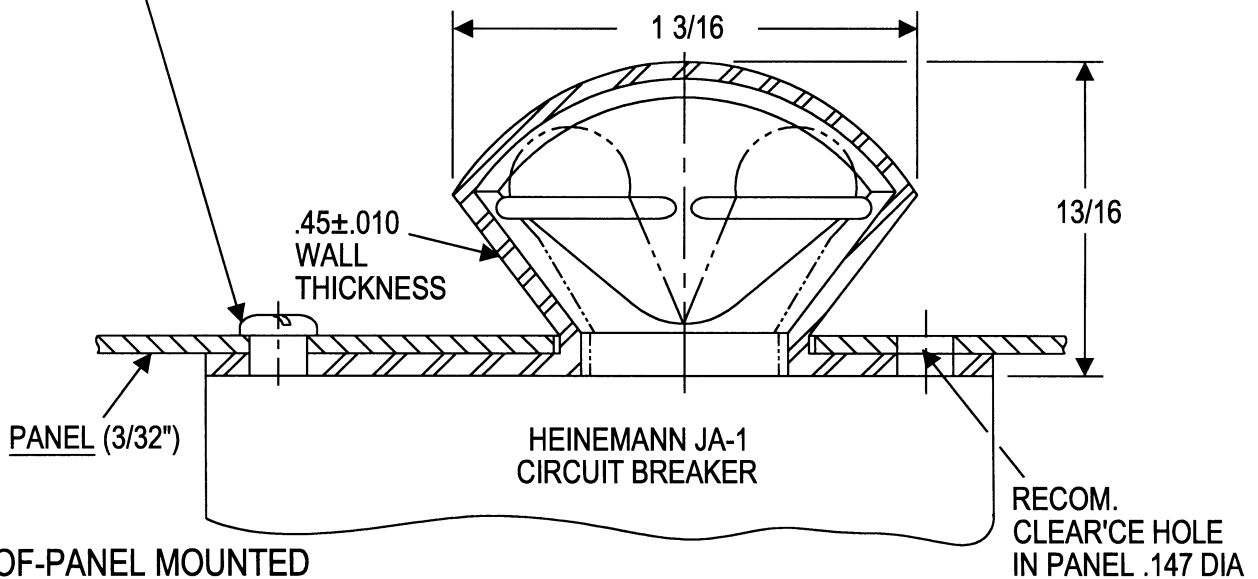

BACK-OF-PANEL MOUNTED

C	CAD COMPUTER GENERATED		1-3-03
B	ADDED DIMENSIONS	NICK	2-6-68
A	REDRWAN WITH FULL FLANGE WAS 1" DIA	NKS	11-1-67
REV.	DESCRIPTION		DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.			
MAT'L: Silicon Rubber Polymer type ASTM D 1418		ENG. DWN. N.K.S.	8-9-67
FINISH:		CHKD. WS	11-1-67
TITLE: CIRCUIT BREAKER BOOT, CIRCUIT BREAKER TOGGLE ROUND HOLE MOUNTED		SCALE 2:1	DWG. NO. C1113/40
APM-HEXSEAL CORPORATION			

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
 THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.