

C3216CH2J101K060AA

TDK Item Description : C3216CH2J101KT****




Application & Main Feature

Commercial Grade (Mid Voltage (100 to 630V))

Series

C3216 [EIA CC1206]



Dimensions

L	3.20mm	+/-0.2mm
W	1.60mm	+/-0.2mm
T	0.60mm	+/-0.15mm
B	0.20mm	Min.
G	1.00mm	Min.

Temperature Characteristic

CH (-25 to 85 degC 0+/-60ppm/degC)

Rated Voltage

2J (630Vdc)

Capacitance

100pF

Capacitance Tolerance

K (+/-10%)

O Factor

1000 Min.


Insulation Resistance

10Gohm Min.


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics

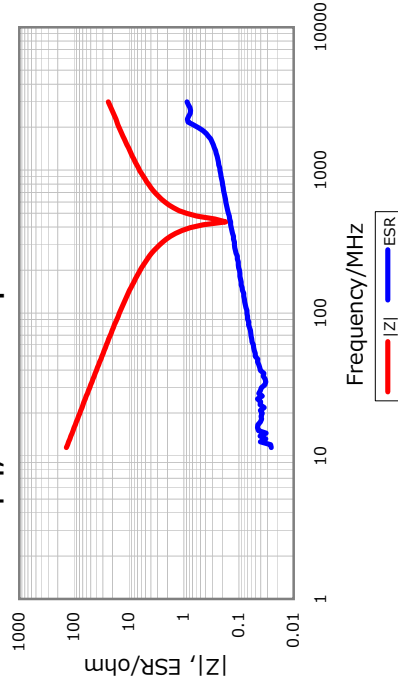


DC Bias Characteristic

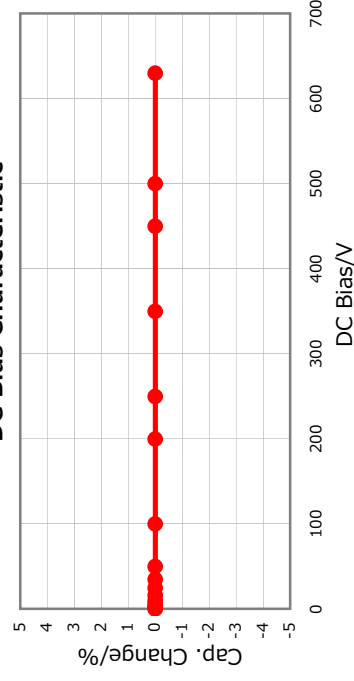

Cap. vs. Freq. Characteristic

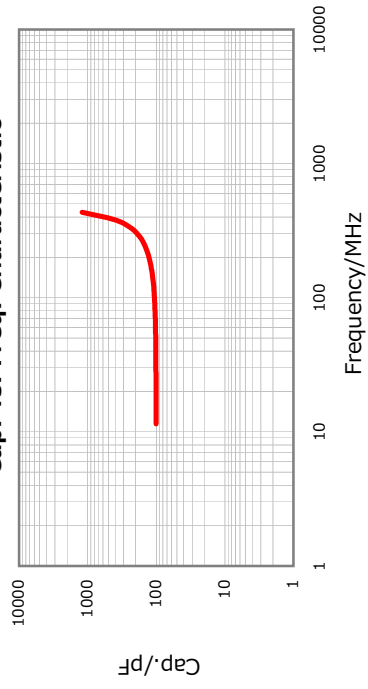

Temperature Characteristics

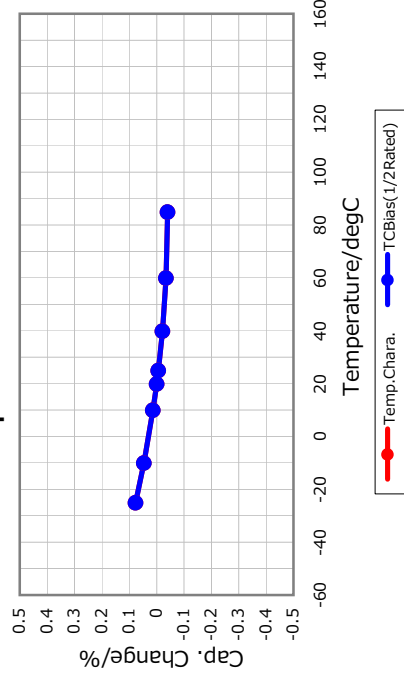

⚠ All specifications are subject to change without notice.

January 3, 2016