

# Disc Type Capacitors with Lead

High Voltage Ceramic Capacitors  
Commercial Grade

Safety Standard Approved  
CD series

Issue date: February 2013

- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# Disc Type Capacitors with Lead

Conformity to RoHS Directive

High Voltage Ceramic Capacitors  
Commercial Grade

Safety Standard Approved  
CD Series

## REINFORCED INSULATION TYPE CLASS 2 HIGH DIELECTRIC

### FEATURES

- Compliant with IEC and the safety standards of various countries.
- This ceramic capacitor meets reinforced insulation's Safety Standards.  
Since it is rated at a withstand voltage of AC.4000V, it can be used in single-unit configurations within European Class II devices.
- Flame-resistant reinforced outer insulation prevents fires, electrical shock, and other potential hazards.
- Compatible with halogen-free external resin coating.

**OPERATING TEMPERATURE RANGE: -25 to +125°C**

### TEMPERATURE CHARACTERISTICS AND TOLERANCE

Temperature characteristics	Test temperature range	Capacitance tolerance
SL (+350 to -1000ppm/°C)	+20 to +85°C	J (±5%)
B (±10%)	-25 to +85°C	K (±10%)
Z5U (+22, -56%)	+10 to +85°C	M (±20%)

### PRODUCT IDENTIFICATION

CD 90 ZU 2GA 222 M Y N K A  
(1) (2) (3) (4) (5) (6) (7) (8) (9) (10)

- Type
- Shape
- Temperature characteristics
- Rated voltage
- Nominal capacitance
- Capacitance tolerance
- Class
- Lead type
- Safety standard
- Halogen-free compatible product

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

## CAPACITANCE AND DIMENSIONS

Part No.	Temperature characteristics	Capacitance (pF)	Capacitance tolerance	Dimensions (mm)			
				D max.	T max.	F	d
CD45SL2GA100JY□*KA	SL (+350 to -1000ppm/°C)	10	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA150JY□KA		15	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA220JY□KA		22	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA330JY□KA		33	J (±5%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA470JY□KA		47	J (±5%)	8.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD45SL2GA680JY□KA		68	J (±5%)	9.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD70-B2GA101KY□KA	B (±10%)	100	K (±10%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD70-B2GA151KY□KA		150	K (±10%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD70-B2GA221KY□KA		220	K (±10%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD75-B2GA331KY□KA		330	K (±10%)	7.5	7.0	10.0+2.0, -1.0	0.6±0.05
CD85-B2GA471KY□KA		470	K (±10%)	9.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD65ZU2GA681MY□KA		Z5U (+22, -56%)	680	M (±20%)	7.0	7.0	10.0+2.0, -1.0
CD70ZU2GA102MY□KA	1,000		M (±20%)	7.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD80ZU2GA152MY□KA	1,500		M (±20%)	8.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD90ZU2GA222MY□KA	2,200		M (±20%)	9.5	7.0	10.0+2.0, -1.0	0.6±0.05
CD11ZU2GA332MY□KA	3,300		M (±20%)	12.0	7.0	10.0+2.0, -1.0	0.6±0.05
CD12ZU2GA472MY□KA	4,700		M (±20%)	13.5	7.0	10.0+2.0, -1.0	0.6±0.05


\* □ : Lead shape symbol

## LIST OF STANDARD LEAD SHAPES

The lead type is indicated by the letter which is the 15th character of the product name.

Example) TDK Product Name: **CD90ZU2GA222MYNKA**

└ N: Lead type (Vertical kink, Short)

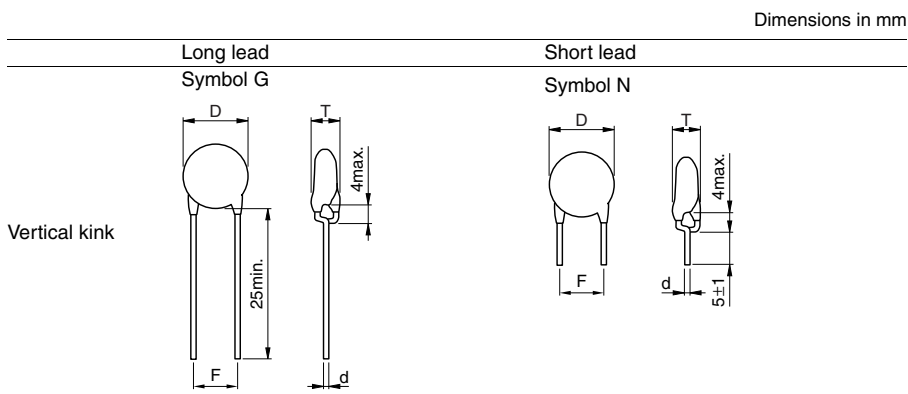

- We recommend using a vertical kink type.
- For bulk products, we recommend a short lead type with the symbol N.

## MARKINGS

Item	Markings	Specifications	Marking examples
1. Series	CD	CD series	<p>(Marking position is reference.)</p>
2. Nominal capacitance	222	2200pF	
3. Capacitance tolerance	M	±20%	
4. Rated voltage Eac	440~X1	X1: AC.440V	
5. TDK's logogram	400~Y1	Y1: AC.400V	
6. Date code	29	Production base code 2012.9*	

\* Year and month of production: last digit of year + month denoted by 1, 2, 3, 4, 5, 6, 7, 8, 9, O (October), N (November), or D (December).

\* The expression has become simplified due to a revision in the standards.

• For more information about products with other capacitance or other data, please contact us.

• All specifications are subject to change without notice.

**CERTIFIED STATUS OF VARIOUS COUNTRIES**

Safety standard	Standard No.	Temperature characteristics	Insulation sub-class	Rated voltage	Approval report No.	
					Taiwan	Xiamen
BSI	BS EN60384-14	SL, B, Z5U	X1, Y1	X1: AC.440V Y1: AC.400V	KM37103	KM37103
VDE	EN 60384-14				40017931	40017931
SEV	EN 60384-14				12.0223	12.0223
SEMKO	EN 60384-14				1125241	1125241
NEMKO	EN 60384-14				P12215264	P12215264
DEMKO	EN 60384-14				D-01094	D-01094
FIMKO	EN 60384-14				FI 27387	FI 27387
IMQ	EN 60384-14				V3691	V3691
SAA	AS3250				CS6268	CS6268
UL	UL 60384-14				E37861	E37861
CSA	CAN/CSA-E60384-14				1785504	1785504
CQC	GB/T14472-1998				CQC12001082617	CQC10001052863

- Certificate numbers shall be changed owing to the revisions of the related standards.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TDK:

[CD45SL2GA100JYNKA](#) [CD65ZU2GA681MYNKA](#) [CD45SL2GA680JYNKA](#) [CD70-B2GA221KYNKA](#)  
[CD45SL2GA220JYNKA](#) [CD70-B2GA151KYNKA](#) [CD45SL2GA470JYNKA](#) [CD45SL2GA150JYNKA](#)  
[CD80ZU2GA152MYNKA](#) [CD85-B2GA471KYNKA](#) [CD75-B2GA331KYNKA](#) [CD45SL2GA330JYNKA](#)  
[CD11ZU2GA332MYNKA](#) [CD90ZU2GA222MYNKA](#) [CD12ZU2GA472MYNKA](#) [CD45-E2GA332K-NKA](#) [CD45-](#)  
[B2GA471K-NKA](#) [CD45-E2GA222K-NKA](#) [CD45SL2GA150K-NKA](#) [CD45-E2GA102M-NKA](#) [CD45-B2GA331K-NKA](#)  
[CD45-E2GA152M-NKA](#) [CD45-E2GA681K-NKA](#) [CD45SL2GA220K-NKA](#) [CD45SL2GA330J-NKA](#) [CD45SL2GA220J-](#)  
[NKA](#) [CD45-B2GA221K-NKA](#) [CD45-B2GA151K-NKA](#) [CD45-B2GA101K-NKA](#) [CD45-E2GA472M-NKA](#) [CD45-](#)  
[E2GA102K-NKA](#) [CD45-E2GA332M-NKA](#) [CD45SL2GA470K-NKA](#) [CD45-E2GA681M-NKA](#) [CD45SL2GA680J-NKA](#)  
[CD45-E2GA222M-NKA](#) [CD45SL2GA470J-NKA](#) [CD45SL2GA100K-NKA](#) [CD45-E2GA152K-NKA](#) [CD45SL2GA330K-](#)  
[NKA](#) [CD45SL2GA100J-NKA](#) [CD45SL2GA680K-NKA](#) [CD45SL2GA150J-NKA](#) [CD45-E2GA472K-NKA](#)