

# SMD Power Inductor CD73



Halogen Free



## Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 8.1 × 7.3 × 4.0mm Max.
- Product weight:0.5g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -30°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -30°C~+100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging.
- 12.9" diameter reel
- 1000pcs per reel



## Applications

- Ideally used in PDA,MP3,DSC/DVC,HDD, Portable DVD, etc as DC-DC converter inductors.

## Dimension - [mm]

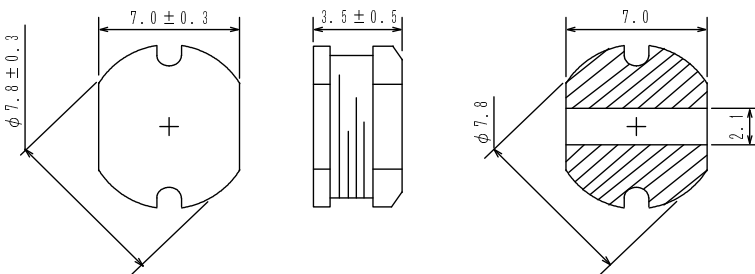

## Land pattern and Schematics - [mm]

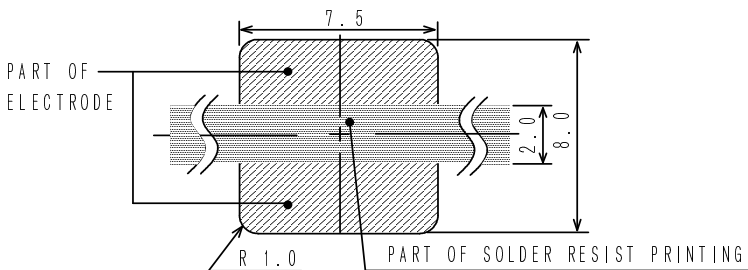

# SMD Power Inductor CD73



## Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu$ H) [ within ] ※1	D.C.R. (m $\Omega$ ) [Max.] (TYP.) (at 20°C)	Rated Current (A) ※2
CD73NP-100MC	100M	10 $\pm$ 20%	80.3(61.8)	1.44
CD73NP-120MC	120M	12 $\pm$ 20%	89.7(69.0)	1.39
CD73NP-150MC	150M	15 $\pm$ 20%	104(80.3)	1.24
CD73NP-180MC	180M	18 $\pm$ 20%	111(85.0)	1.12
CD73NP-220MC	220M	22 $\pm$ 20%	129(99.2)	1.07
CD73NP-270MC	270M	27 $\pm$ 20%	153(118)	0.94
CD73NP-330MC	330M	33 $\pm$ 20%	170(131)	0.85
CD73NP-390MC	390M	39 $\pm$ 20%	217(167)	0.74
CD73NP-470MC	470M	47 $\pm$ 20%	252(194)	0.68
CD73NP-560KC	560K	56 $\pm$ 10%	282(217)	0.64
CD73NP-680KC	680K	68 $\pm$ 10%	332(255)	0.59
CD73NP-820KC	820K	82 $\pm$ 10%	406(312)	0.54
CD73NP-101KC	101K	100 $\pm$ 10%	481(370)	0.51
CD73NP-121KC	121K	120 $\pm$ 10%	536(412)	0.49
CD73NP-151KC	151K	150 $\pm$ 10%	755(581)	0.40
CD73NP-181KC	181K	180 $\pm$ 10%	1022(786)	0.36
CD73NP-221KC	221K	220 $\pm$ 10%	1200(923)	0.31
CD73NP-271KC	271K	270 $\pm$ 10%	1306(1045)	0.29
CD73NP-331KC	331K	330 $\pm$ 10%	1495(1196)	0.28

※1: Inductance measuring frequency: 10  $\mu$  H  $\sim$  82  $\mu$  H ; at 2.52 MHz.  
100  $\mu$  H  $\sim$  330  $\mu$  H ; at 1 kHz.













※2: Rated current: The DC current at which the inductance decreases to 90 % of it's initial value or when  $\Delta t=40^{\circ}\text{C}$ , whichever is lower ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CD73



## Saturation Current & Temperature Rise Graph

— L (25°C) — L (105°C) —  $\Delta T$

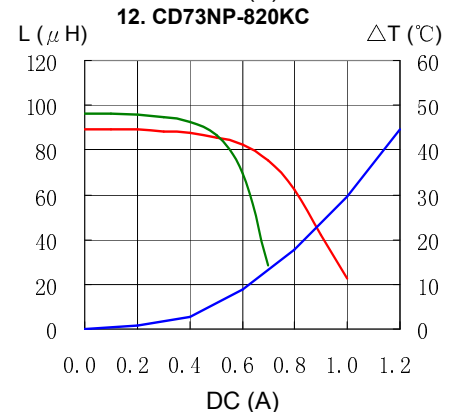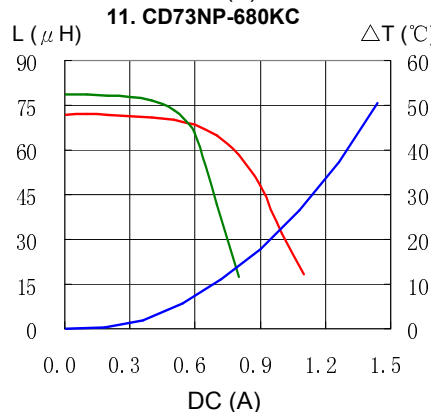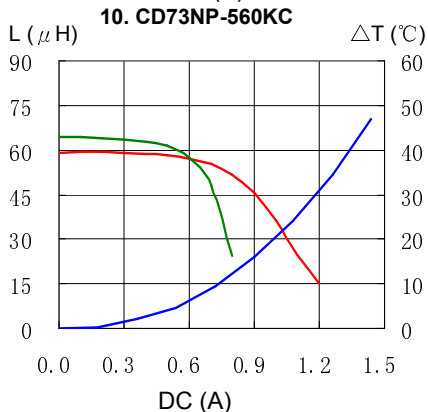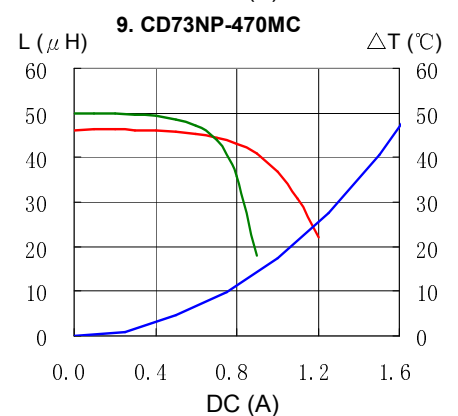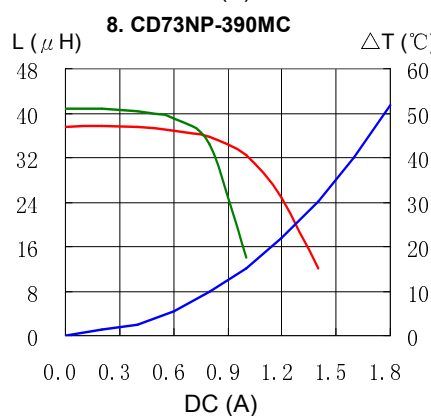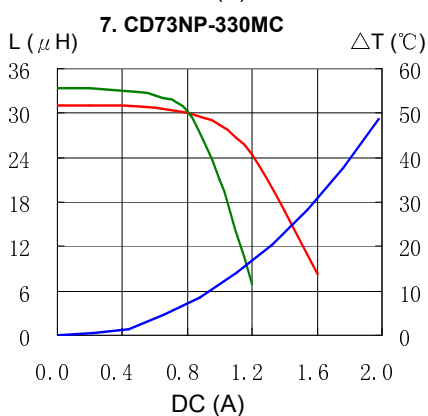
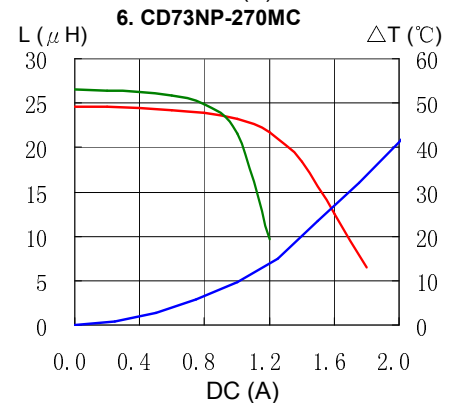
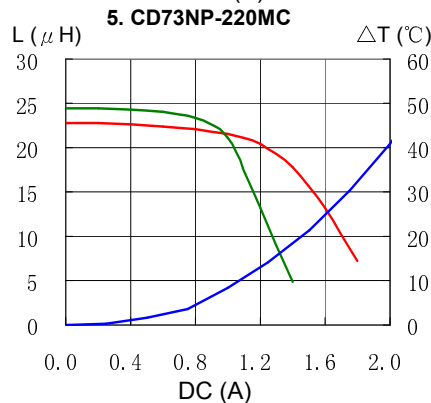
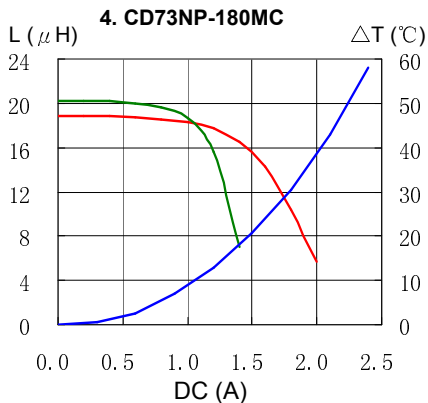
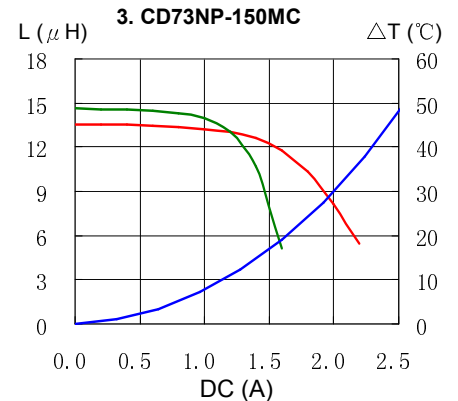
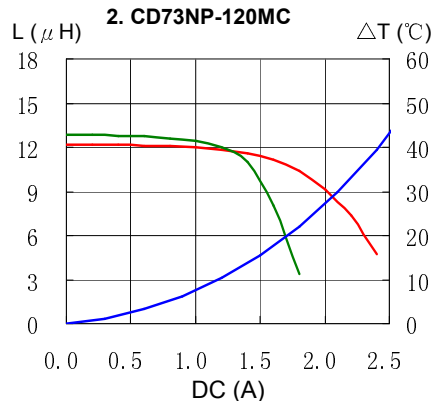
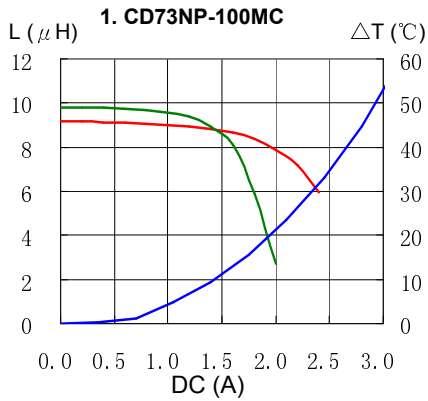


# SMD Power Inductor CD73



## Saturation Current & Temperature Rise Graph



— L (25°C)    — L (105°C)    —  $\Delta T$

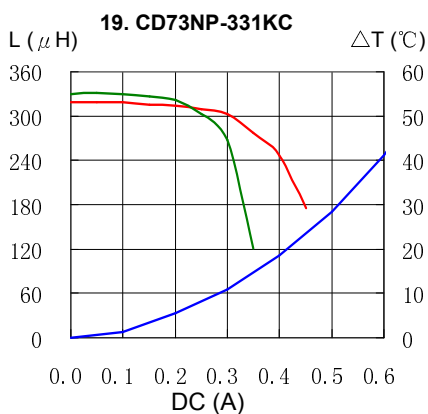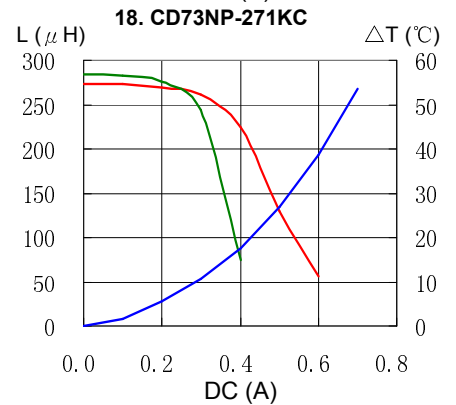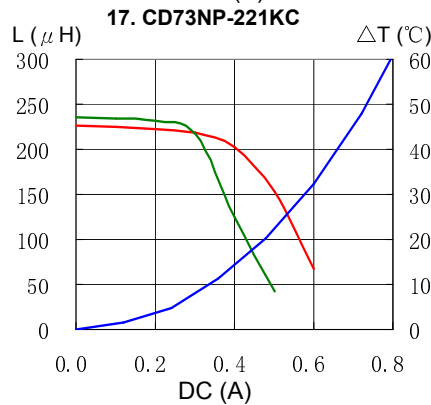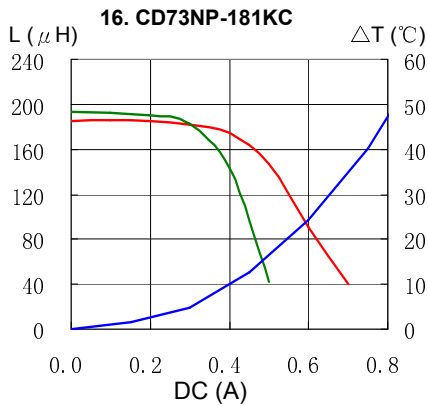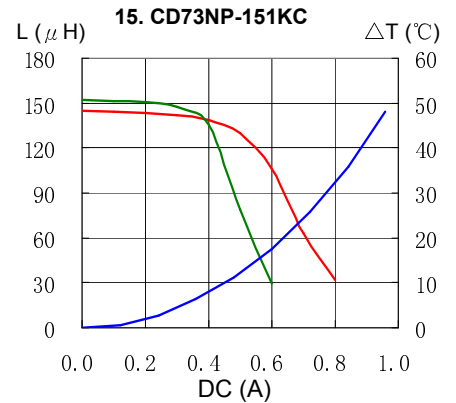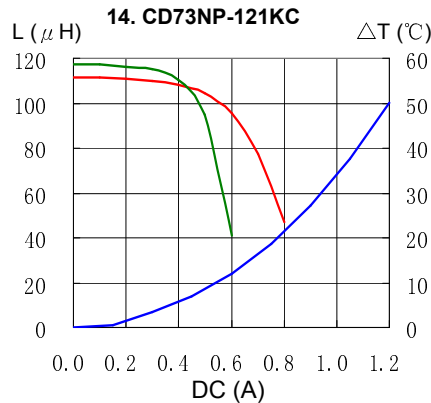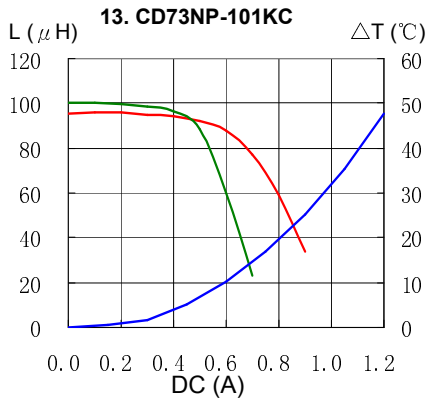

# SMD Power Inductor CD73



## Solder Reflow Condition

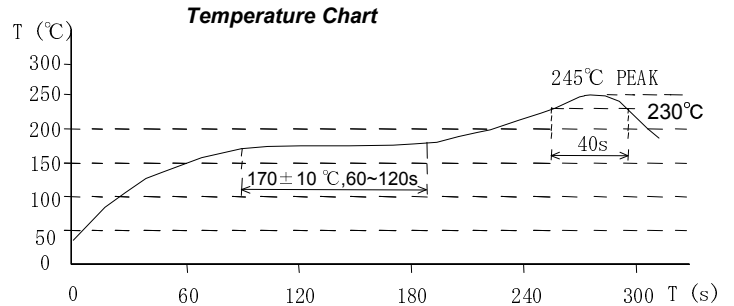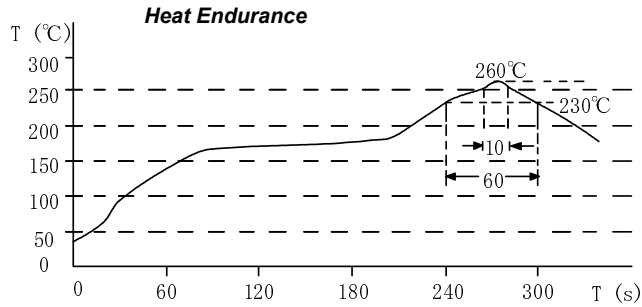

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)