


NTS_{Series} / NTF_{Series}

Temperature cycle : 1000 cycles



◆FEATURES


1. Large capacitance by small size.
2. Excellent noise absorption.
3. High permissible ripple current capability.
4. NTF: Temperature cycle : 1000 cycles.

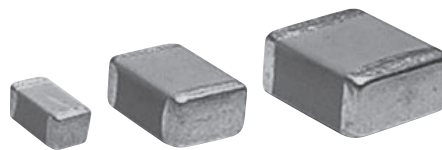

◆APPLICATIONS

1. Smoothing circuit of DC-DC converters.
2. On-board power supplies.
3. Voltage regulators for computers.
3. Noise suppressor for various kinds of equipments.
4. High reliability equipments.

◆CONSTRUCTION

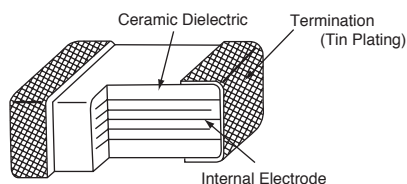

◆RATINGS

1. Category Temperature Range	-55 to +125°C
2. Rated Voltage Range	25, 50, 100, 250, 500V _{dc}
3. Rated Capacitance Range	0.010 to 47μF
4. Rated Capacitance Tolerance	M (±20%) : Standard, K (±10%)
5. Temperature Characteristics	X7R
6. Rated Ripple Current	See No.5 on the following table



◆SPECIFICATIONS

No.	Items	Specification	Test Condition		
1	Withstand Voltage	No abnormality.	Rated voltage		Withstand voltage
			Less than 250V		250% of rated voltage
			More than 250V Less than 500V		100V + 150% of rated voltage
			More than 500V		130% of rated voltage
			Shall be applied for 5 seconds.		
2	Insulation Resistance	100/C _R (MΩ) or 4000(MΩ) whichever is less.	Rated voltage shall be applied for 60±5 seconds at temperature 25±2°C.		
3	Rated Capacitance	Within specified tolerance.		C _R ≤10μF	C _R >10μF
			Temperature	25±2°C	
4	Dissipation Factor	5.0% maximum.	Frequency	1±0.1kHz	120±12Hz
			Voltage	1±0.2Vrms	0.5±0.2Vrms
5	Rated Ripple Current	See STANDARD RATINGS	10kHz~1MHz (sine curve) Ripple voltage V _p shall be less than the rated voltage.		

As customer requirement, Chemi-Con has submits the test results according to AEC-Q200 for Multilayer ceramic capacitors. Please contact us for more information.

NTS Series / NTF Series

◆SPECIFICATIONS

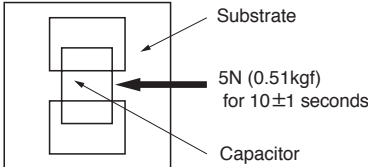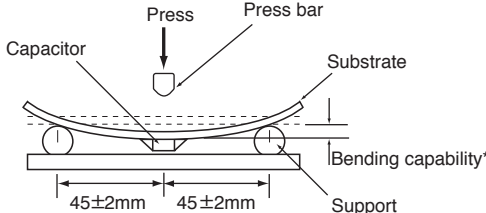No.	Items	Specification	Test Condition															
6	Adhesion	No visible damage.																
7	Bend strength of the face plating	Appearance : No visible damage. ΔC/C : ±15%	The substrate shall be bend at a rate of 1mm/s for 5 seconds.  *Bending capability NTS : 1mm NTF : 1mm or 2mm															
8	Solderability	Min. 75% of surface of the termination shall be covered with new solder	<table><tr><th>Solder</th><th>Pb Free</th></tr><tr><td>Solder Temperature</td><td>245±5℃</td></tr><tr><td>Dipping Time</td><td>2±0.5sec.</td></tr></table>	Solder	Pb Free	Solder Temperature	245±5℃	Dipping Time	2±0.5sec.									
Solder	Pb Free																	
Solder Temperature	245±5℃																	
Dipping Time	2±0.5sec.																	
9	Resistance to Soldering Heat	Appearance : No visible damage. ΔC/C : ±15% D.F. : To meet the initial specification. I.R. : To meet the initial specification.	Preheating Condition : <table><tr><th>Step</th><th>Temperature</th><th>Time</th></tr><tr><td>1</td><td>100±10℃</td><td>2min.</td></tr><tr><td>2</td><td>200±10℃</td><td>2min.</td></tr></table> Solder Temperature : 260±5℃ Dipping Time : 2±0.5 seconds	Step	Temperature	Time	1	100±10℃	2min.	2	200±10℃	2min.						
Step	Temperature	Time																
1	100±10℃	2min.																
2	200±10℃	2min.																
10	Temperature Cycle	Appearance : No visible damage. ΔC/C : ±15% D.F. : To meet the initial specification. I.R. : To meet the initial specification.	<table><tr><th>Step</th><th>Temperature (℃)</th><th>(min.)</th></tr><tr><td>1</td><td>Min. Category temperature ±3</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>3 max.</td></tr><tr><td>3</td><td>Max. Category temperature ±3</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>3 max.</td></tr></table> For above temperature cycle. NTS : For 5 cycles NTF : For 1000 cycles	Step	Temperature (℃)	(min.)	1	Min. Category temperature ±3	30±3	2	Room temperature	3 max.	3	Max. Category temperature ±3	30±3	4	Room temperature	3 max.
Step	Temperature (℃)	(min.)																
1	Min. Category temperature ±3	30±3																
2	Room temperature	3 max.																
3	Max. Category temperature ±3	30±3																
4	Room temperature	3 max.																
11	Humidity Load Life	Appearance : No abnormality. ΔC/C : ±15% D.F. : 10% maximum I.R. : 25/C _R (MΩ) or 1000(MΩ) whichever is less.	Temperature : 40±2℃ Humidity : 90 to 95%RH Voltage : Rated voltage Time : 500±²⁴₀hours															
12	Endurance	Appearance : No abnormality. ΔC/C : ±15% D.F. : 10% maximum I.R. : 50/C _R (MΩ) or 1000(MΩ) whichever is less.	Temperature : 125±3℃ Voltage : Rated voltage Time : 1000±⁴⁸₀hours															

*C_R : Rated Capacitance(μF)

◆STANDARD RATINGS

Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Maximum ripple current (Arms)	Part Number	Taping Quantity per reel (pcs. / reel)		
		L	W	Tmax.	a					
25	1.0	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS250B105M31N0T00	3,000		
	1.5						KTS250B155M31N0T00	3,000		
	2.2						KTS250B225M31N0T00	3,000		
	3.3						KTS250B335M32N0T00	1,600		
	4.7	3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS250B475M32N0T00	1,600		
	6.8						KTS250B685M32N0T00	1,600		
	10						KTS250B106M43N0T00	800		
	15						KTS250B156M43N0T00	800		
	22	5.7±0.4	5.0±0.4	2.8	0.8±0.5	2.0	KTS250B226M55N0T00	800		
	33			3.0			KTS250B336M55N0T00	800		
	47			7.5±0.5			6.3±0.5	4.0	1.0±0.5	3.0
	50	0.33	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS500B334M31N0T00	3,000	
0.47		KTS500B474M31N0T00						3,000		
0.68		KTS500B684M31N0T00						3,000		
1.0		KTS500B105M31N0T00						3,000		
1.5		3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS500B155M32N0T00	1,600		
2.2							KTS500B225M32N0T00	1,600		
3.3							KTS500B335M32N0T00	1,600		
4.7							KTS500B475M43N0T00	800		
6.8		4.5±0.4	3.2±0.4	2.8	0.6±0.3	1.0	KTS500B685M43N0T00	800		
10							KTS500B106M55N0T00	800		
15							KTS500B156M55N0T00	800		
22							KTS500B226M76N0T00	300		
		7.5±0.5	6.3±0.5	4.0	1.0±0.5	3.0				
100		0.1	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS101B104M31N0T00	3,000	
		0.15						KTS101B154M31N0T00	3,000	
	0.22	KTS101B224M31N0T00						3,000		
	0.33	KTS101B334M31N0T00						3,000		
	0.47	KTS101B474M31N0T00						3,000		
	0.68	KTS101B684M31N0T00						3,000		
	1.0	3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS101B105M32N0T00	1,600		
	1.5						KTS101B155M32N0T00	1,600		
	2.2						KTS101B225M32N0T00	1,600		
	1.5	4.5±0.4	3.2±0.4	2.8	0.6±0.3	1.0	KTS101B155M43N0T00	800		
	2.2						KTS101B225M43N0T00	800		
	3.3						KTS101B335M43J0T00	800		
	4.7		3.2±0.5	3.2			KTS101B475M43E0T00	800		
	3.3						KTS101B335M55N0T00	800		
	4.7						KTS101B475M55N0T00	800		
	6.8	5.7±0.4	5.0±0.4	3.2	0.8±0.5	2.0	KTS101B685M55N0T00	800		
	6.8						KTS101B475M55N0T00	800		
	6.8						KTS101B685M55F0T00	800		
		7.5±0.5	6.3±0.5	3.5	1.0±0.5	3.0				

※Please consult with us when you consider the rating other than a standard table.


NTS Series

◆STANDARD RATINGS

Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Maximum ripple current (Arms)	Part Number	Taping Quantity per reel (pcs. / reel)
		L	W	Tmax.	a			
250	0.01	3.2±0.2	1.6±0.2	1.8	0.5±0.3	0.3	KTS251B103M31N0T00	3,000
	0.022						KTS251B223M31N0T00	3,000
	0.033						KTS251B333M31N0T00	3,000
	0.047						KTS251B473M31N0T00	3,000
	0.068						KTS251B683M31N0T00	3,000
	0.1	3.2±0.4	2.5±0.3	2.6	0.6±0.3	0.5	KTS251B104M31N0T00	3,000
	0.15						KTS251B154M32N0T00	1,600
	0.22						KTS251B224M32N0T00	1,600
	0.33						KTS251B334M32N0T00	1,600
	0.47	4.5±0.4	3.2±0.4	2.8	0.6±0.3	1.0	KTS251B474M43N0T00	800
	0.68						KTS251B684M43N0T00	800
	1.0	5.7±0.4	5.0±0.4	2.8	0.8±0.5	2.0	KTS251B105M55N0T00	800
	1.5						KTS251B155M55N0T00	800
	1.5	7.5±0.5	6.3±0.5	3.5	1.0±0.5	3.0	KTS251B155M76N0T00	300
	2.2			5.0			KTS251B225M76N0T00	300
500	0.47	5.7±0.4	5.0±0.4	2.7	0.8±0.5	1.5	KTS501B474M55N0T00	800
	0.56			3.0			KTS501B564M55N0T00	800
	0.68			2.5			KTS501B684M76N0T00	500
	1.0	7.5±0.5	6.3±0.5	3.2	1.0±0.5	2.0	KTS501B105M76N0T00	300
				3.5			KTS501B125M76N0T00	300
	1.2							

※Please consult with us when you consider the rating other than a standard table.


◆PART NUMBERING SYSTEM

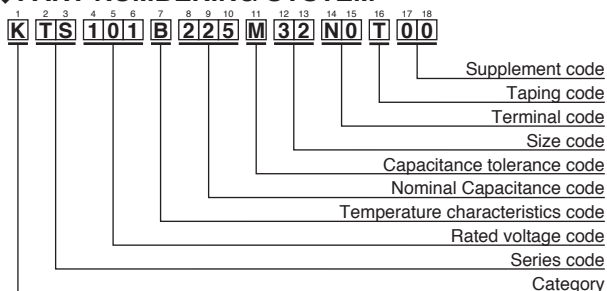

Size Code

Size Code	Code	
	JIS	EIA
31	3216	1206
32	3225	1210
43	4532	1812
55	5750	2220
76	7563	3025

◆DIMENSIONS




Please refer to "Part Numbering System" of the beginning of a catalog for the details.

◆STANDARD RATINGS

Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Maximum ripple current (Arms)	Part Number	Taping Quantity per reel (pcs. / reel)
		L	W	Tmax.	a			
25	1.0	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF250B105M31NLT00	3,000
	1.5						KTF250B155M31NLT00	3,000
	2.2						KTF250B225M31NLT00	3,000
	3.3						KTF250B335M32NHT00	1,600
	4.7	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF250B475M32NHT00	1,600
	6.8						KTF250B685M32NHT00	1,600
	10						KTF250B106M43NHT00	800
	15	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF250B156M43NHT00	800
	22						KTF250B226M55NHT00	800
	33						KTF250B336M55NHT00	800
50	0.33	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF500B334M31NLT00	3,000
	0.47						KTF500B474M31NLT00	3,000
	0.68						KTF500B684M31NLT00	3,000
	1.0						KTF500B105M31NLT00	3,000
	1.5	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF500B155M32NHT00	1,600
	2.2						KTF500B225M32NHT00	1,600
	3.3						KTF500B335M32NHT00	1,600
	4.7	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF500B475M43NHT00	800
	6.8						KTF500B685M43NHT00	800
	10	5.7±0.4	5.0±0.4	2.8	1.0±0.4	2.0	KTF500B106M55NHT00	800
	15						KTF500B156M55NHT00	800
100	0.1	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF101B104M31NLT00	3,000
	0.15						KTF101B154M31NLT00	3,000
	0.22						KTF101B224M31NLT00	3,000
	0.33						KTF101B334M31NLT00	3,000
	0.47						KTF101B474M31NLT00	3,000
	0.68						KTF101B684M31NLT00	3,000
	1.0	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF101B105M32NHT00	1,600
	1.5						KTF101B155M32NHT00	1,600
	2.2						KTF101B225M32NHT00	1,600
	3.3						KTF101B335M32NHT00	1,600
	4.7	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF101B475M43NHT00	800
	6.8						KTF101B685M43NHT00	800
	10						KTF101B106M55NHT00	800
	15						KTF101B156M55NHT00	800
250	0.033	3.2±0.3	1.6±0.2	1.8	0.7±0.2	0.3	KTF251B333M31NLT00	3,000
	0.047						KTF251B473M31NLT00	3,000
	0.068						KTF251B683M31NLT00	3,000
	0.1						KTF251B104M31NLT00	3,000
	0.15	3.2±0.4	2.5±0.3	2.6	0.7±0.2	0.5	KTF251B154M32NLT00	1,600
	0.22						KTF251B224M32NLT00	1,600
	0.33						KTF251B334M32NLT00	1,600
	0.47	4.5±0.4	3.2±0.4	2.8	0.7±0.2	1.0	KTF251B474M43NLT00	800
	0.68						KTF251B684M43NLT00	800
	1.0						KTF251B105M55NLT00	800
	1.5						KTF251B155M55NLT00	800
500	0.47	5.7±0.4	5.0±0.4	2.7	1.0±0.4	1.5	KTF501B474M55NLT00	800
	0.56						KTF501B564M55NLT00	800

※Please consult with us when you consider the rating other than a standard table.


◆PART NUMBERING SYSTEM

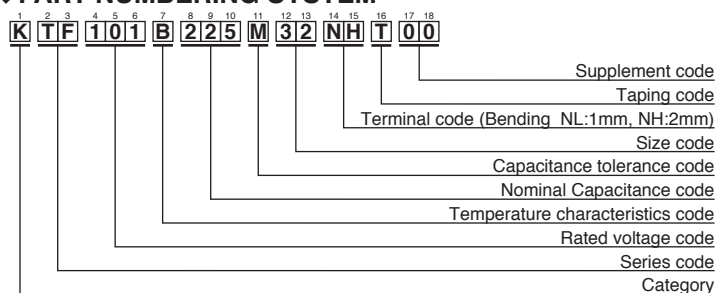

Size Code

Size Code	Code	
	JIS	EIA
31	3216	1206
32	3225	1210
43	4532	1812
55	5750	2220
76	7563	3025

◆DIMENSIONS



Please refer to "Part Numbering System" of the beginning of a catalog for the details.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[United Chemi-Con \(UCC\):](#)

KTS101B475K55N0T00	KTS500B156M55N0T00	KTS250B336M55N0T00	KTS500C106M55N0T00
KTS500B106M55N0T00	KTS250C226M55N0T00	KTS251B105K55N0T00	KTS250B226M55N0T00
KTS251B334K32N0T00	KTS500B685M43N0T00	KTS500B475M43N0T00	KTS101B335K55N0T00
KTS101B685K55F0T00	KTS101B474K32N0T00	KTS101B475K43E0T00	KTS101B475M43E0T00
KTS101B685M55F0T00	KTS101B685M55N0T00	KTS250C336M55N0T00	KTS251B684M43N0T00
KTS500B685M43S0T00	KTS500B155M32N0T00	KTS250B335M32N0T00	KTS500B335M32N0T00
KTS251B474M43N0T00	KTS500B226M76N0T00	KTS101B335M55N0T00	KTS101B155M43N0T00
KTS101B335M43J0T00	KTF500B156M55NHT00	KTS101B475M55N0T00	KTS101B104M31N0T00
KTS101B684M31N0T00	KTS101B105M32N0T00	KTF101B225M43NHT00	KTS501B684M76N0T00
KTS251B224M32N0T00	KTF251B474M43NLT00	KTF251B104M31NLT00	KTS251B473M31N0T00
KTS251B334M32N0T00	KTS501B564M55N0T00	KTF101B334M31NLT00	KTS101B334M31N0T00
KTF251B333M31NLT00	KTS500B684M31N0T00	KTS251B155M76N0T00	KTS251B155M55N0T00
KTF500B474M31NLT00	KTF250B105M31NLT00	KTS501B125M76N0T00	KTS251B154M32N0T00
KTF101B224M31NLT00	KTF101B105M32NHT00	KTF500B684M31NLT00	KTF250B106M43NHT00
KTF101B685M55FHT00	KTF500B106M55NHT00	KTS250B155M31N0T00	KTF251B105M55NLT00
KTS101B155M32N0T00	KTF251B155M55NLT00	KTF250B685M32NHT00	KTF250B475M32NHT00
KTS251B103M31N0T00	KTF101B154M31NLT00	KTF251B224M32NLT00	KTS500B334M31N0T00
KTF251B334M32NLT00	KTF250B226M55NHT00	KTS501B105M76N0T00	KTS501B474M55N0T00
KTS251B683M31N0T00	KTS251B104M31N0T00	KTS251B105M55N0T00	KTS250B475M32N0T00
KTF500B475M43NHT00	KTF501B474M55NLT00	KTF500B155M32NHT00	KTS250B685M32N0T00
KTF101B225M32NHT00	KTF251B683M31NLT00	KTF251B154M32NLT00	KTS500B225M32N0T00
KTS251B223M31N0T00	KTF500B685M43NHT00	KTS101B224M31N0T00	KTF101B155M43NHT00
KTF251B473M31NLT00	KTF251B684M43NLT00	KTS251B225M76N0T00	KTS101B474M31N0T00
KTF500B335M32NHT00	KTS500B105M31N0T00	KTF101B155M32NHT00	KTS101B225M32N0T00
KTF500B334M31NLT00	KTF101B104M31NLT00	KTF101B474M31NLT00	KTF500B105M31NLT00