


M39003/01-2502

aka M39003/01-2502 T212C107M010PS CSR13C107MP

Capacitor, tantalum, 100 uF, +/-20% Tol, 10V@85C

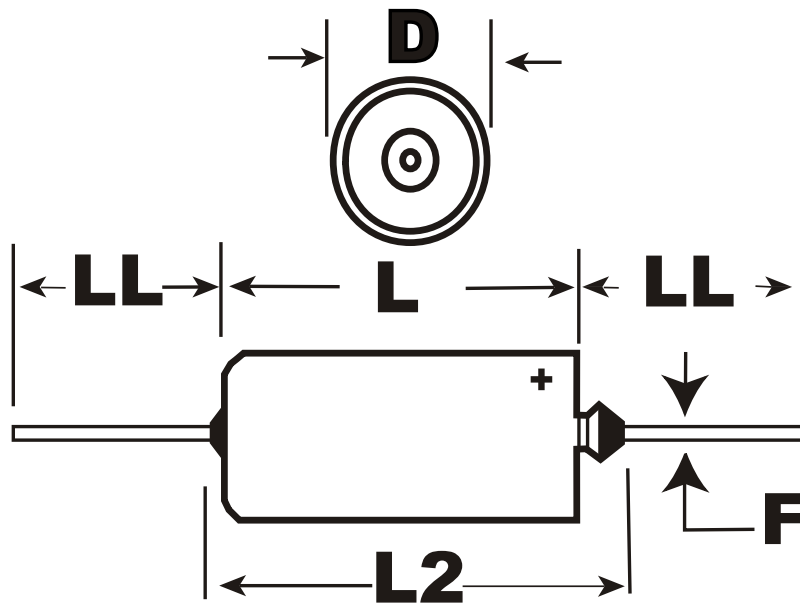

Dimensions (mm)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|-----------|----------------------|-------------------------------|
| D | 7.34 | +/-0.25 | Value: | 100 uF |
| L1 | 17.42 | +/-0.79 | Voltage DC @ 85C: | 10V |
| L2 | 20.88 | +0 | Voltage DC @ 125C: | 6.3V |
| F | 0.64 | +/-0.05 | Tolerance: | +/-20% |
| LL | 38.1 | +/-6.35 | Application: | Military ER/General Purpose |
| | | | Body Type: | Axial Hermetic ('cs13-style') |
| | | | Temperature Range: | -55/+125C |
| | | | ESR: | 1 Ohm |
| | | | ESR Frequency @ 25C: | 100kHz |
| | | | Leakage Current: | 5 uA |
| | | | Dissipation Factor: | 6% |
| | | | Package Kind: | Bulk |
| | | | Package Type: | Tray |

Notes:

-Dimensions include insulating sleeve (standard)

-C