


KEMET Part Number: M39003/01-2614
(T212C106K050PS, CSR13G106KP)



Capacitor, tantalum, 10 uF, +/-10% Tol, 50V@85C

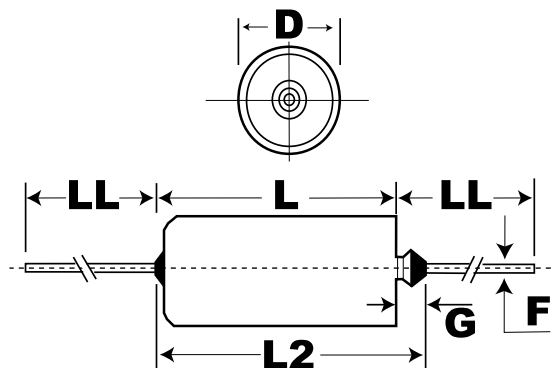

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	7.34	+/-0.25
L	17.42	+/-0.79
L2	20.88	+0
F	0.64	+/-0.05
LL	38.1	+/-6.35
G	3.46	+0.79

Notes:

- Dimensions include insulating sleeve (standard)
- Lead length shown is for parts supplied with bulk packaging. See taping spec for T&R or AMMO.
- Failure rates M,P,R,and S are obsolete as of 1982. Mil-PRF-39003 suggests B as replacement.

General Information

Manufacturer: KEMET

Electrical Specifications

Value:	10 uF
Voltage DC @ 85C:	50V
Voltage DC @ 125C:	33V
Tolerance:	+/-10%
Application:	Military ER/General Purpose
Body Type:	Axial Hermetic ('cs13-style')
Temperature Range:	-55/+125C
Testing:	Standard Testing to Mil-PRF-39003
ESR:	1.6 Ohm
ESR Frequency @ 25C:	100kHz
Leakage Current:	2.5 uA
Dissipation Factor:	4%

Packaging Specifications

Package Kind:	Bulk
Package Type:	Tray

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



© 2006-2012 IntelliData.net