


Capacitor, ceramic, 100 pF, +/-10% Tol, 200V, BX, Lead Spacing=0.2"

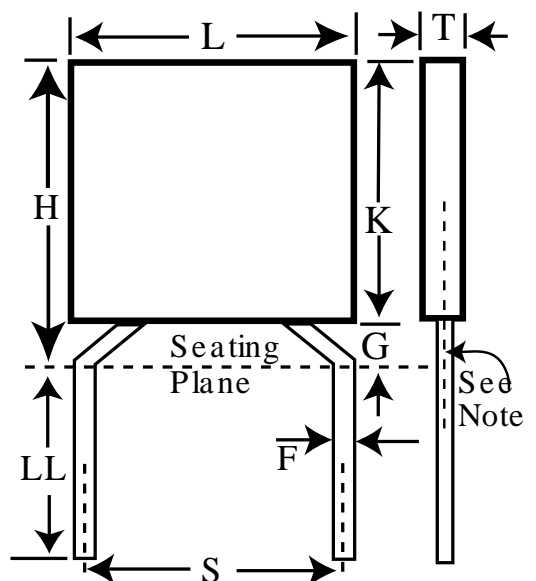

Dimensions (in)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|---------------|--------------------------|----------------|
| W | 0.09 | +/-0.01 | Capacitance: | 100 pF |
| H | 0.19 | +0.01/-0.055 | Lead Spacing: | 0.2" |
| L | 0.19 | +/-0.01 | Voltage: | 200V |
| S | 0.2 | +/-0.03 | Temperature Coefficient: | BX |
| LL | 1.25 | min | Tolerance: | +/-10% |
| F | 0.025 | +0.004/-0.002 | Body Type: | Radial Molded |
| K | 0.2 | nom | Lead Type: | Standard Leads |
| G | 0.045 | max | Lead Form: | Hockey Stick |
| | | | Package Kind: | Bulk |
| | | | Package Type: | Bag |
| | | | Package Quantity: | 100 |

Notes:

-Note A: Center line of the leads will be within 0.03 in [0.76 mm] of the center line of the body.

-Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk