

MIL-PRF-39006/33 Series

Military Conventional Wet Tantalum




This data sheet contains the MIL-PRF-39006 ratings for which AVX is a qualified approved supplier. This will be continually updated as the qualification expands.

This design is an axial leaded tubular case. It includes a welded tantalum can and header assembly that provides a hermetic seal to withstand harsh environments. The 1000 hour failure rates of 1%, 0.1% and 0.01% correspond to “M”, “P”, and “R” respectively. For details on testing conditions please refer to MIL-PRF-39006.

**Currently qualified M39006 ratings include T3-T4 case size:
M39006/33 “M” Level; 25V to 75V**

OUTLINE DIMENSIONS

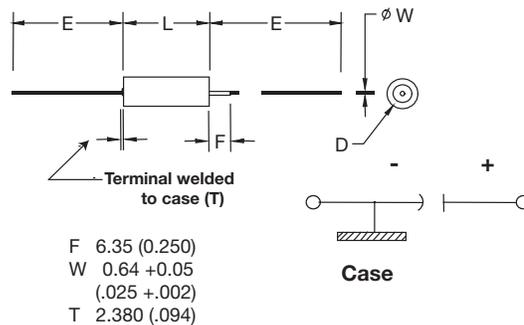

CASE DIMENSIONS: millimeters (inches)

| DSCC Case Size | AVX Case Size | L | D | D | E |
|----------------|---------------|--------------------------------|-----------------------------|-----------------------|---------------|
| | | +0.79 (0.031) -0.41 (0.016) | Basic Case ±0.41 (0.016) | Insulated Case Max | ±6.35 (0.250) |
| T3 | D | 19.46 (0.766) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |
| T4 | E | 26.97 (1.062) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |


VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

| Voltage (DC) | | | | | | | | | | | | |
|----------------------------|-------|-----|-----|------|------|------|------|------|----|------|-----|-----|
| Rated Voltage: (V_r) | 85°C | 6 | 8 | 10 | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| Derated Voltage: (V_c) | 125°C | 4 | 5 | 6 | 10 | 15 | 20 | 30 | 40 | 50 | 65 | 85 |
| Surge Voltage: (V_s) | 85°C | 6.9 | 9.2 | 11.5 | 17.3 | 28.8 | 34.5 | 57.5 | 69 | 86.3 | 115 | 144 |

MIL-PRF-39006/33 Series

Military Conventional Wet Tantalum

HOW TO ORDER MILITARY M39006 PART NUMBER:

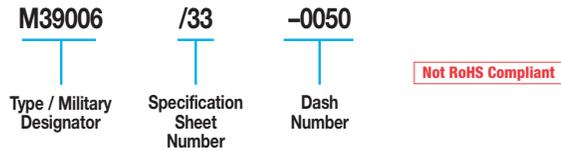

RIPPLE CURRENT MULTIPLIERS vs. Frequency, temperature and applied voltage^{1/2/3/}

| Frequency of Applied Ripple Current | | 120Hz | | | | 800Hz | | | | 1kHz | | | |
|-------------------------------------|---------|-------|------|------|------|-------|------|------|------|------|------|------|------|
| Ambient Still Air Temperature (°C) | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of | 100% | 0.60 | 0.39 | – | – | 0.71 | 0.43 | – | – | 0.72 | 0.45 | – | – |
| 85°C | 90% | 0.60 | 0.46 | – | – | 0.71 | 0.55 | – | – | 0.72 | 0.55 | – | – |
| Rated | 80% | 0.60 | 0.52 | 0.35 | – | 0.71 | 0.62 | 0.42 | – | 0.72 | 0.62 | 0.42 | – |
| Peak | 70% | 0.60 | 0.58 | 0.44 | – | 0.71 | 0.69 | 0.52 | – | 0.72 | 0.70 | 0.52 | – |
| Voltage | 66-2/3% | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 |

| Frequency of Applied Ripple Current | | 10kHz | | | | 40kHz | | | | 100kHz | | | |
|-------------------------------------|---------|-------|------|------|------|-------|------|------|------|--------|------|------|------|
| Ambient Still Air Temperature (°C) | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of | 100% | 0.88 | 0.55 | – | – | 1.00 | 0.63 | – | – | 1.10 | 0.69 | – | – |
| 85°C | 90% | 0.88 | 0.67 | – | – | 1.00 | 0.77 | – | – | 1.10 | 0.85 | – | – |
| Rated | 80% | 0.88 | 0.76 | 0.52 | – | 1.00 | 0.87 | 0.59 | – | 1.10 | 0.96 | 0.65 | – |
| Peak | 70% | 0.88 | 0.85 | 0.64 | – | 1.00 | 0.97 | 0.73 | – | 1.10 | 1.07 | 0.80 | – |
| Voltage | 66-2/3% | 0.88 | 0.88 | 0.68 | 0.40 | 1.00 | 1.00 | 0.77 | 0.45 | 1.10 | 1.10 | 0.85 | 0.50 |

- 1/ At 125°C the rated voltage of the capacitors decreases to 66 2/3 of the 85°C rated voltage.
- 2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitors.
- 3/ The ripple current listed in the parametric tables represents a rating calculated by using a maximum internal temperature rise (ΔT) at 50°C at 40 kHz at 85°C ambient temperature, with a maximum peak rated voltage of 66.67 percent of the 85°C peak voltage rating.

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V _R) to 85°C | | | | |
|-------------|------|--|-----|-----|-----|-----|
| μF | Code | 25V | 30V | 50V | 60V | 75V |
| 470 | 477 | | | | | E |
| 560 | 567 | | | | E | |
| 680 | 687 | | | E | | |
| 750 | 757 | | | | | |
| 1000 | 108 | | D | | | |
| 1200 | 128 | D | | | | |
| 1500 | 158 | | E | | | |
| 1800 | 188 | E | | | | |

MIL-PRF-39006/33 Series

Military Conventional Wet Tantalum

M39006 /33 RATINGS AND DASH NUMBER REFERENCE

| M39006/33 Dashes "M" Level | Tolerance (%) | Cap (μ F) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (μ A) | | DF max (%) | ESR max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size |
|----------------------------------|------------------|--|--|-----------------------|----------------------|------------------|-------------------------------------|---|-----------------------------------|-------|--------|--|--------------|
| | | | | +25°C | +85°C & +125°C | | | | -55°C | +85°C | +125°C | | |
| -0007 | 20 | 1200 | 25 | 5 | 20 | 70.6 | 0.65 | 7 | -70 | 12 | 18 | 2600 | T3 |
| -0008 | 10 | | | | | | | | | | | | |
| -0009 | 20 | 1800 | 25 | 6 | 25 | 81.4 | 0.5 | 7 | -75 | 12 | 20 | 3100 | T4 |
| -0010 | 10 | | | | | | | | | | | | |
| -0017 | 20 | 1000 | 30 | 7 | 25 | 63.3 | 0.7 | 7 | -70 | 10 | 18 | 2500 | T3 |
| -0018 | 10 | | | | | | | | | | | | |
| -0019 | 20 | 1500 | 30 | 12 | 35 | 81.4 | 0.6 | 6 | -72 | 10 | 20 | 3000 | T4 |
| -0020 | 10 | | | | | | | | | | | | |
| -0029 | 20 | 680 | 50 | 5 | 40 | 43.1 | 0.7 | 10 | -58 | 10 | 20 | 2750 | T4 |
| -0030 | 10 | | | | | | | | | | | | |
| -0039 | 20 | 560 | 60 | 5 | 40 | 40.5 | 0.8 | 10 | -58 | 8 | 15 | 2750 | T4 |
| -0040 | 10 | | | | | | | | | | | | |
| -0049 | 20 | 470 | 75 | 5 | 50 | 38.3 | 0.9 | 12 | -55 | 8 | 12 | 2750 | T4 |
| -0050 | 10 | | | | | | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.