

RHE5G2A151J1A2A03B

" # " indicates a package specification code.

Recommended

Flow OK

Complies with RoHS

AEC-Q200


Anti-noise

Deflecting crack

Soldering crack

< List of part numbers with package codes >  
RHE5G2A151J1A2A03B

Shape

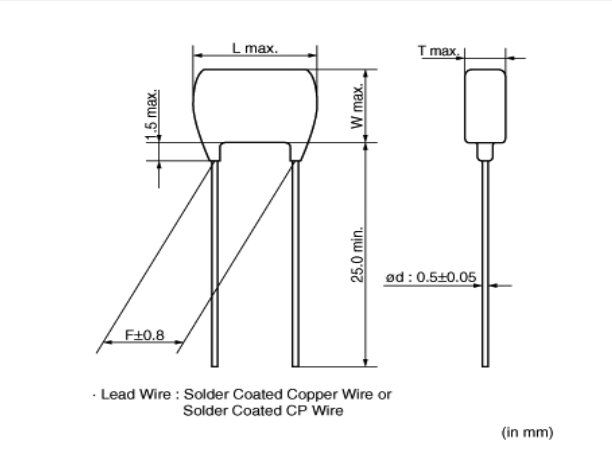

Lead Wire : Solder Coated Copper Wire or Solder Coated CP Wire

(in mm)

L size or outer diameter D (mm)	4.0 mm max.
W size	3.5 mm max.
T size	2.5 mm max.
Lead spacing F	2.5 ± 0.8mm
Lead diameter d	0.5 ± 0.05mm

References

Packaging	Specifications	Minimum quantity
	Packing in bulk	500

Specifications

Capacitance	150pF ± 5%
Rated voltage	100Vdc
Temperature characteristics (complied standard)	X8G(Murata)
Temperature coefficient	0 ± 30ppm/
Temperature range of temperature characteristics	25 to 150
Operating temperature range	-55 to 150

⚠ Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.